



AI EDGE COMPUTER

# JCO-3000-ORN-A\_2L

Mid-Range AI Edge Computer with NVIDIA Jetson Orin™ NX/NANO, 2x LAN



## Features

- NVIDIA® Jetson Orin™ NX 8GB/16GB or Nano 8GB/4GB GPU with 32 Tensor Cores
- 1x HDMI 2K (2560 x 1440) 60Hz
- 2x GbE LAN
- 1x External Micro SIM socket
- 1x M.2 (M Key, 2242/2280, PCIe 4, Support NVMe)
- 4x USB 3.0, 1x Micro USB (OTG)
- 4x DI + 4x DO with Isolation
- 12 to 24VDC Wide Range Power Input Supporting AT Mode
- Wide Operating Temperature -20°C to 55°C (25W, NX/Nano Module)



## Specifications

System	
Processor	- NVIDIA® Jetson Orin™ NX/Nano GPU with 32 Tensor Cores
	• 16 GB: 1024-core NVIDIA Ampere architecture GPU (25W/100 TOPS)
	• 8 GB: 1024-core NVIDIA Ampere architecture GPU (20W/70 TOPS)
	• 8 GB: 1024-core NVIDIA Ampere architecture GPU (15W/40 TOPS)
	• 4 GB: 512-core NVIDIA Ampere architecture GPU (10W/20 TOPS)
LAN Chipset	GbE1: RGMII GbE2: Intel LAN Chip
Display	
HDMI	1x HDMI 2K (2560*1440) 60Hz
Storage	
M.2	1x M.2 (M Key, 2242/2280, PCIe x4, NVMe) (Default 128GB)
SIM Socket	1x External Micro SIM Socket (M.2 B Key attached)
Expansion	
M.2	1x M.2 (B Key, 3042/3052, USB 3.2 Gen1, Support 4G/5G) 1x M.2 (E Key, 2230, PCIe x1, USB 2.0, Support Wi-Fi/Bluetooth)
I/O	
CAN	CAN 2.0 A
COM	2x RS-232/485 (Internal, switch by Jumper)
DIO	4 in / 4 out (Isolated)
LAN	2x RJ45
OOB	1x RJ45 (Optional OOB Management Module, Optional, Occupied 1x COM)
USB	4x USB 3.0 ( Shared with USB 3.2 Gen 2 Hub) 1x Micro USB ( OTG)
Others	6x WiFi Antenna Holes 1x Power Switch 1x CMOS Battery Cable 1x 4-Pin FAN Connector
Operating System	
Linux	Linux Ubuntu 20.04 with JetPack
Power	
Power Adapter	AC/DC 12V/5A, 60W (Optional)
Power Mode	AT
Power Supply Voltage	12~24V
Power Connector	3-pin Terminal Block
Power Protection	OVP (Over Voltage Protection); OCP (Over Current Protection) Reverse Protection
Environment	
Operating Temperature	-20°C to 55°C (25W, NX Module) -20°C to 60°C (15W, Nano Module)
Storage Temperature	-30°C to 85°C
Relative Humidity	10% to 95% (non-condensing)

## Certification

### EMC:

- CE
- FCC Class A (47 CFR part 15.109 and part 15.107)
- ICES-003
- UKCA

### Safety:

- UL Safety Pending: UL62368-1, 3rd Ed., (cULus)
- Test procedure: CB Scheme
- Standard: IEC 62368-1:2018

### Green Product:

- RoHS 3.0 (Directive 2015/863/EU)
- REACH

## Vibration

IEC60068-2-64:2008

With SSD: 5 Grms (5 - 500 Hz, 0.5 hr/axis)  
Designed to comply with MIL-STD-810G Method 514.7 Procedure I

## Shock


IEC60068-2-27:2008

With SSD: 50G half-sin 11ms  
Designed to comply with MIL-STD-810G Method 516.7 Procedure I  
Package Drop Test: ISTA 2A

## Physical


Dimensions	192 (W) x 140(D) x 58(H) mm
Weights	2.8 ~ 3.6 kg
Construction	Extruded Aluminum with Heavy Duty Metal
Mounting Options	Wall Mounting/DIN rail (Optional)

External I/O Mechanical Layout

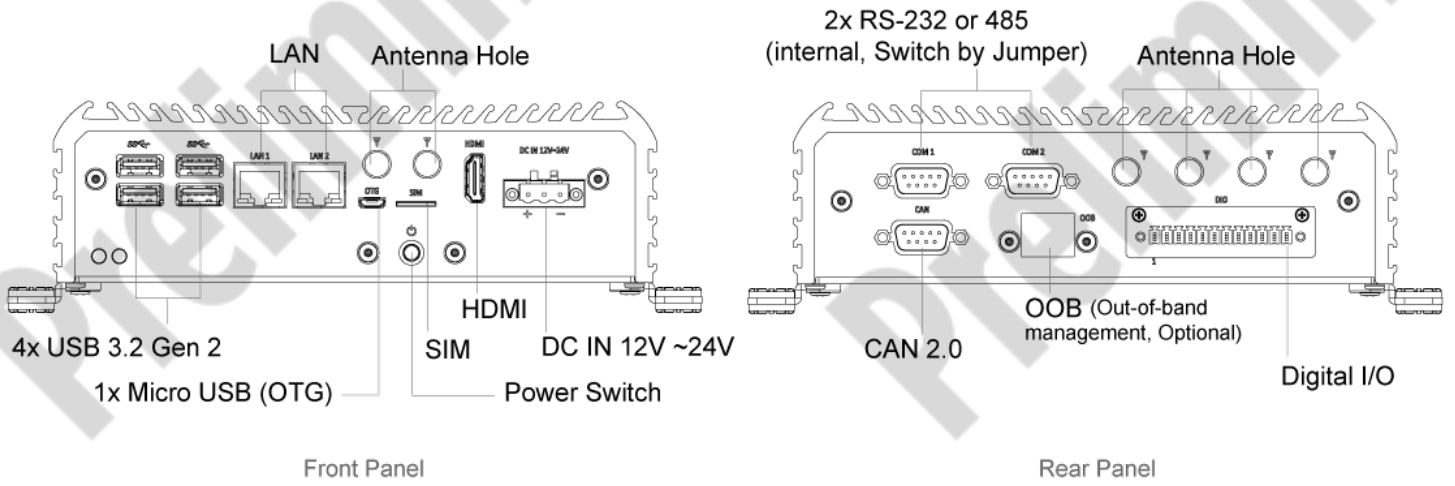

Dimension

Unit: mm

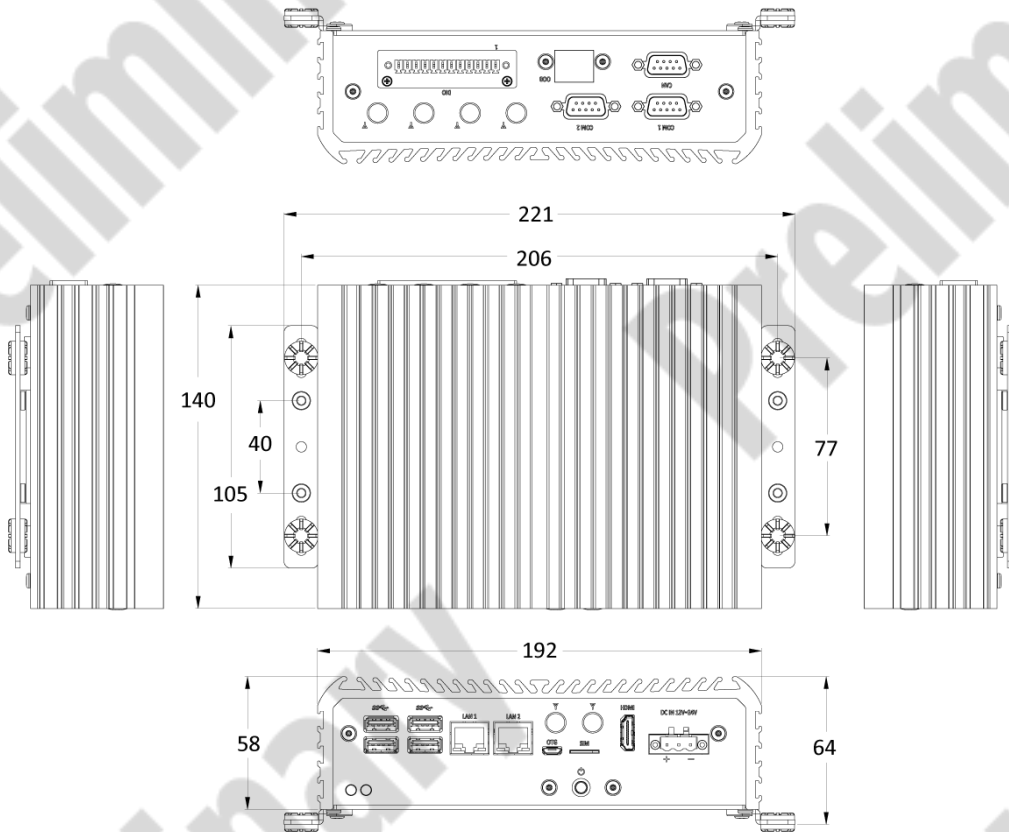

### Available Models

Model No.	Description
TBD	To Be Determined

### Optional Accessories

Model No.	Description
1-E09A06008	Adapter AC/DC 12V 5A 60W with 3pin Terminal Block Plug 5.0mm Pitch
1-TPCD00005	Power Cord, 3-pin US Type, 180cm
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm

### Packing List

1x JCO-3000-ORN-A\_2LAN Mid-Range AI Computer  
 1x Wall Mount Kit  
 1x Accessory Kit

### Compliances and Standards

Shock	IEC60068-2-27:2008 With SSD: 50G half-sin 11ms Designed to comply with MIL-STD-810G Method 516.7 Procedure I Package Drop Test: ISTA 2A IEC60068-2-27:2008 Designed to comply with MIL-STD-810G Method 516.7 Procedure I
Vibration	IEC60068-2-64:2008 With SSD: 5 Grms (5 - 500 Hz, 0.5 hr/axis) Designed to comply with MIL-STD-810G Method 514.7 Procedure I IEC60068-2-64:2008 Designed to comply with MIL-STD-810G Method 514.7 Procedure I
Operating Temperature	-20°C to 55°C (25W, NX Module) -20°C to 60°C (15W, Nano Module) IEC60068-2-1:2007 (Cold test procedure) IEC60068-2-2:2007 (Dry heat test procedure) IEC60068-2-3:2007 (Damp heat, steady state, test procedure) IEC60068-2-14:2009 (Wide temperature range thermal shock)
EMI	<ul style="list-style-type: none"> <li>• CE</li> <li>• FCC Class B</li> <li>• FCC Class A (47 CFR part 15.109 and part 15.107)</li> <li>• ICES-003</li> <li>• UKCA</li> </ul>
Safety	<ul style="list-style-type: none"> <li>• UL Safety: UL62368-1, 3rd Ed., (cULus)</li> <li>• Test procedure: CB Scheme</li> <li>• Standard: IEC 62368-1:2018</li> </ul>
Green Product	<ul style="list-style-type: none"> <li>• RoHS 3,0 (Directive 2015/863/EU)</li> <li>• REACH</li> </ul>