



# SIO-W215-J1900

15.6" 16:9 FHD Resistive / Capacitive Touch Stainless Steel Panel PC with Intel® Celeron® Processor J1900



**FEATURES**

- 15.6" Full HD 16:9 LCD with resistive 5-wire / projected capacitive touch
- Intel® Celeron® processor J1900, 2.0 GHz
- 1x 204-pin DDR3L SODIMM. max up to 8GB
- 1x mSATA
- 1x M12 LAN, 2x USB 2.0, 1x M12 COM
- 1x Full-size Mini PCIe for expansion
- Support 110V to 240V AC power input
- -20°C to 55°C operating temperature
- Full system IP66/IP69K with Stainless Steel SUS316 construction


**SPECIFICATIONS**

<b>Display</b>	
LCD Size	15.6" (16:9)
Max Resolution	1920 x 1080 (FHD)
Contrast Ratio	800:1
LCD Color	16.2M
Pixel Pitch (mm)	0.17925 (H) x 0.17925 (V)
Viewing Angle (H-V)	170 / 170
Backlight MTBF	50000 hrs (LED Backlight)
<b>Touch</b>	
Resistive 5-Wire	For SIO-W215R-J1900
Projected Capacitive	For SIO-W215C-J1900
<b>System</b>	
Processor	Intel® Celeron® Processor J1900, Quad Core, 2MB Cache, 2.0 GHz
System Chipset	SoC integrated
LAN Chipset	GbE1: Intel® I210-IT (Support Wake-on-LAN and PXE) GbE2: Intel® I210-IT (Support Wake-on-LAN and PXE)
Audio Codec	Realtek ALC888S HD Audio Codec
System Memory	1x 204-Pin DDR3L 1333 MHz SO-DIMM, Max 8GB
BIOS	AMI uEFI 256MB SPI flash
Watchdog	Software Programmable Supports 1~255 sec. System Reset
<b>Storage</b>	
mSATA	1x mSATA slot for internal storage
SIM Socket	1x Internal SIM socket
<b>Expansion</b>	
Mini PCI Express	1x Full-size Mini PCIe
<b>Other Features</b>	
OSD	OSD: Power On/Off, Reset Touch: On/Off switch
<b>I/O</b>	
COM	1x RS-232/422/485 by M12 A-Code 8-pin
USB	2x USB 2.0 by M12 A-code 8-pin
LAN	1x LAN by M12 X-Code 8-pin
Others	1x Additional RS-232/422/485 by M12 A-Code 8-pin 2x Additional USB 2.0 by M12 A-Code 8-pin 1x Additional LAN by M12 X-Code 8-pin 2x WiFi Antenna


<b>Operating System</b>	
Windows	Windows 10
Linux	Linux kernel 3.X
<b>Power</b>	
Power Mode	ATX
Power Supply Voltage	110 ~ 240V AC Input Optional 12V DC Input
Power Connector	M12 A-code 4-pin
Power Adapter	Optional AC/DC 12V/5A, 60W Optional Waterproof Power Input Cable
<b>Environment</b>	
Operating Temp.	-20°C to 55°C optional wide Temp. -20°C to 60°C
Storage Temp.	-20°C to 70°C
Relative Humidity	10%~80% (non-condensing)
IP Level	Full System IP66/IP69K
Vibration	With SSD: 2.4 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis
Shock	With SSD: 20G, half sine, 11ms
Certifications	CE, FCC Class A
<b>Physical</b>	
Construction	Stainless Steel SUS316
Dimensions	425 (W) x 276(H) x 49.5 (D) mm
Weight	SIO-W215R: 7.39Kg SIO-W215C: 7.25Kg
Mounting	VESA Mounting Holes 100 x 100mm Optional Yoke Mount, Panel Mount

\* All specifications and photos are subject to change without notice

## EXTERNAL I/O MECHANICAL LAYOUT

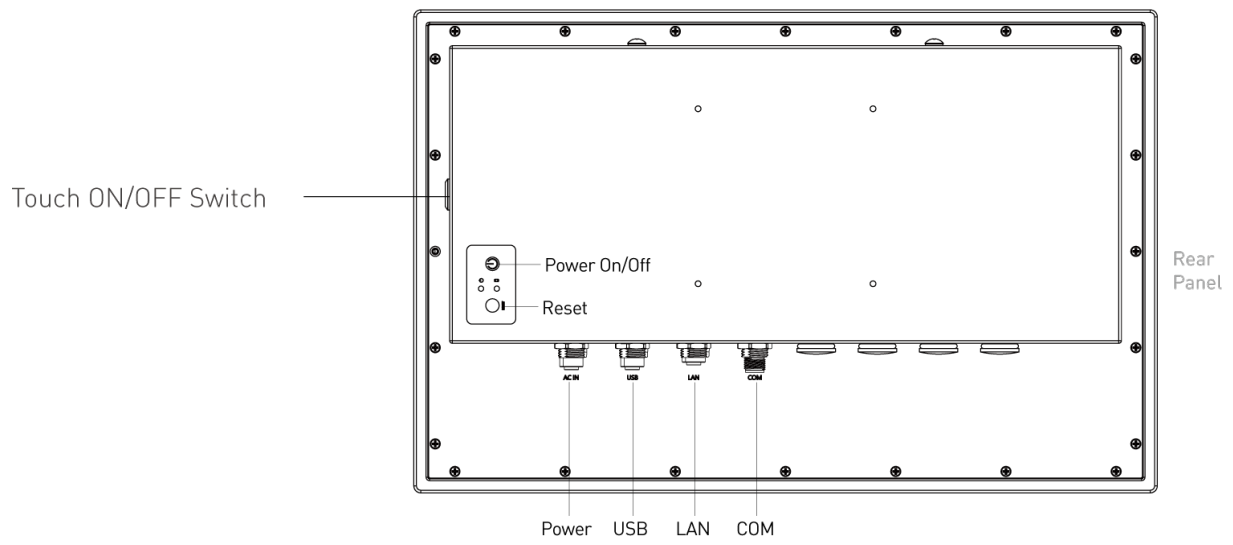

## DIMENSIONS

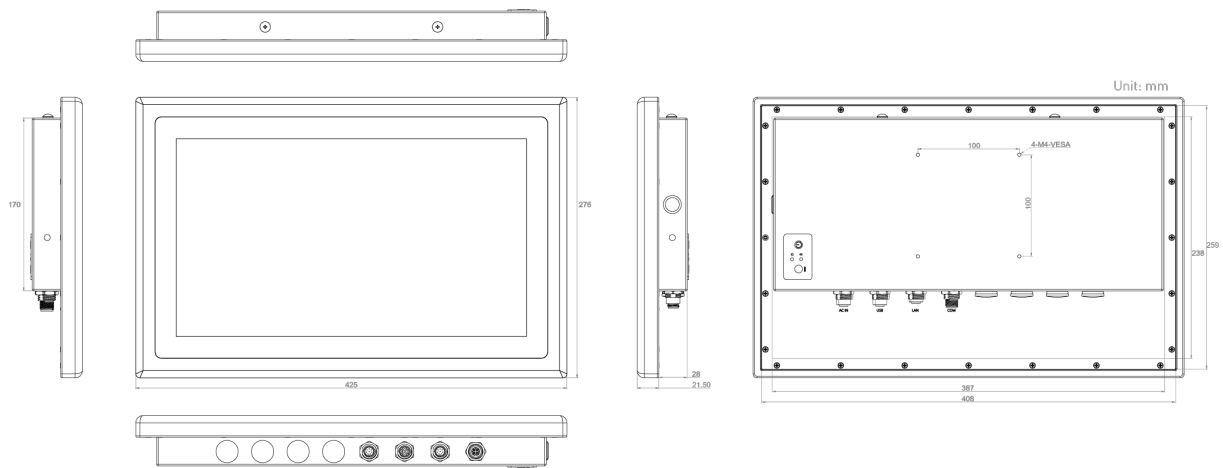

## AVAILABLE MODELS

MODEL NO.	DESCRIPTION
SIO-W215R-J1900	SIO-W215R-J1900 15.6" 16:9 FHD Resistive Touch Stainless Steel Panel PC with Intel® Celeron® Processor J1900
SIO-W215C-J1900	15.6" 16:9 FHD Capacitive Touch Stainless Steel Panel PC with Intel® Celeron® Processor J1900

## OPTIONAL ACCESSORIES

MODEL NO.	DESCRIPTION
1-TPWR00027	Waterproof AC Power Input M12 A-CODE 4P PWR Cable to Plug Type_US L=3M
1-TPWR00028	Waterproof AC Power Input M12 A-CODE 4P PWR Cable to Plug Type_EU L=3M
1-TUSB00034	Waterproof USB 2.0 Cable 3M
1-TCOM00019	Waterproof COM Cable 3M
1-TLAN00015	Waterproof LAN Cable 3M

## PACKING LIST

- 1x SIO-W215 Series Stainless Steel Panel PC
- 1x Utility DVD Driver
- 1x Waterproof Connector Cover Set