

FEATURES


- Supports 4x USB 3.0 ports (share PCIe Gen2 x1 bandwidth)
- Independent 1.5A over-current protection (OCP) for each port
- Compliant with xHCI 1.0, USB 3.0 Rev 1.0
- Wide Operating Temperature -25°C to 70°C
- Programmable power on/off control on each port




SPECIFICATIONS

- 4x USB 3.0 Type A
- 1x 4-pin Power connector

MECHANICAL LAYOUT AND PIN ASSIGNMENT

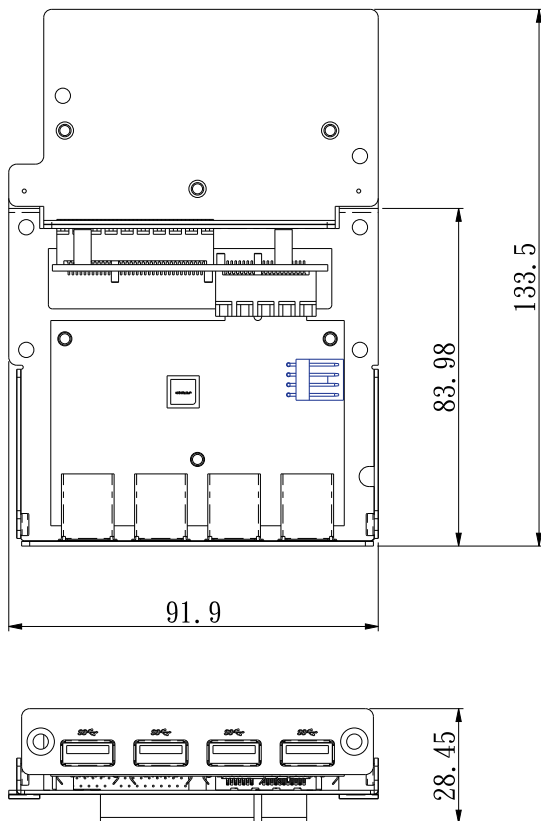

PIN ASSIGNMENT



Pin	Signal
1	5V
2	GND
3	GND
4	12V

* All specifications and photos are subject to change without notice.