



IP65 INDUSTRIAL TOUCHSCREEN MONITOR

AIO-W215-MX

15.6" Full HD Capacitive Industrial Touchscreen Monitor




Features

- 15.6" (16:9) Full HD Capacitive Industrial Touchscreen Monitor
- Front IP65 for protection against water and dust
- Scratch Resistant 7H Glass Hardness IK07
- Versatile Display Outputs; HDMI and DP
- Anti-Glare Screen, Anti-Noise CS 10V rms
- 0°C to 50°C extended operating temperature
- Backlight lifetime 50,000 Hours
- World Class Certifications for Safety and Reliability: CE/FCC/CB/UL/UKCA/ICES

Specifications


Display	
IP Rating	Front IP65
LCD Size	15.6" (16:9)
Max. Resolution	1920 x 1080 (Full HD)
Brightness (cd/m ²)	450 nits with Anti-Glare Screen
Contrast Ratio	1000:1
LCD Color	16.7M
Pixel Pitch (mm)	0.17925(H) x 0.17925(V)
Viewing Angle	89/89/89/89 (Typ.) (CR>=10)
Backlight Lifetime	50,000 Hours (LED Backlight)
Touch	
Touch Type	Projected Capacitive Touch
Surface Hardness	7H / IK07
Multi-touch	10 point (Support Glove Mode)
Anti-noise	CS 10V rms
Interface	USB Type B
I/O	
DisplayPort	1x Display Port 1.1
HDMI	1x HDMI 1.4a
USB	2x USB 2.0 Type A 1x USB Type B for Touch
Speaker	Internal Speaker 2W+2W
OSD	On/Off, Menu, Adjust - and +, Exit
Audio	1x line-out
Power	
Power Adapter	60W with locking (12V 5A)
Power Supply Voltage	DC 12V~24V
Power Connector	DC Jack 5.5mm/2.5mm (OD/ID)
Environment	
Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 60°C
Relative Humidity	10% to 80% (non-condensing)
Certification	UL 62368 Ed. 3, UL 50E Type 12, CE, FCC Class A, CB, ICES-003, UKCA, RCM, VCCI
Vibration	3 Grms (5 - 500 Hz, 0.5 hr/axis)
Shock	20G half-sin 11ms
Physical	
Dimensions	400 (W) x 249 (H) x 50 (D) mm
Weights	2.3 kg
Mounting	VESA Mount (75mm x 75mm/100mm x 100mm) Panel Mount (optional)

External I/O Mechanical Layout

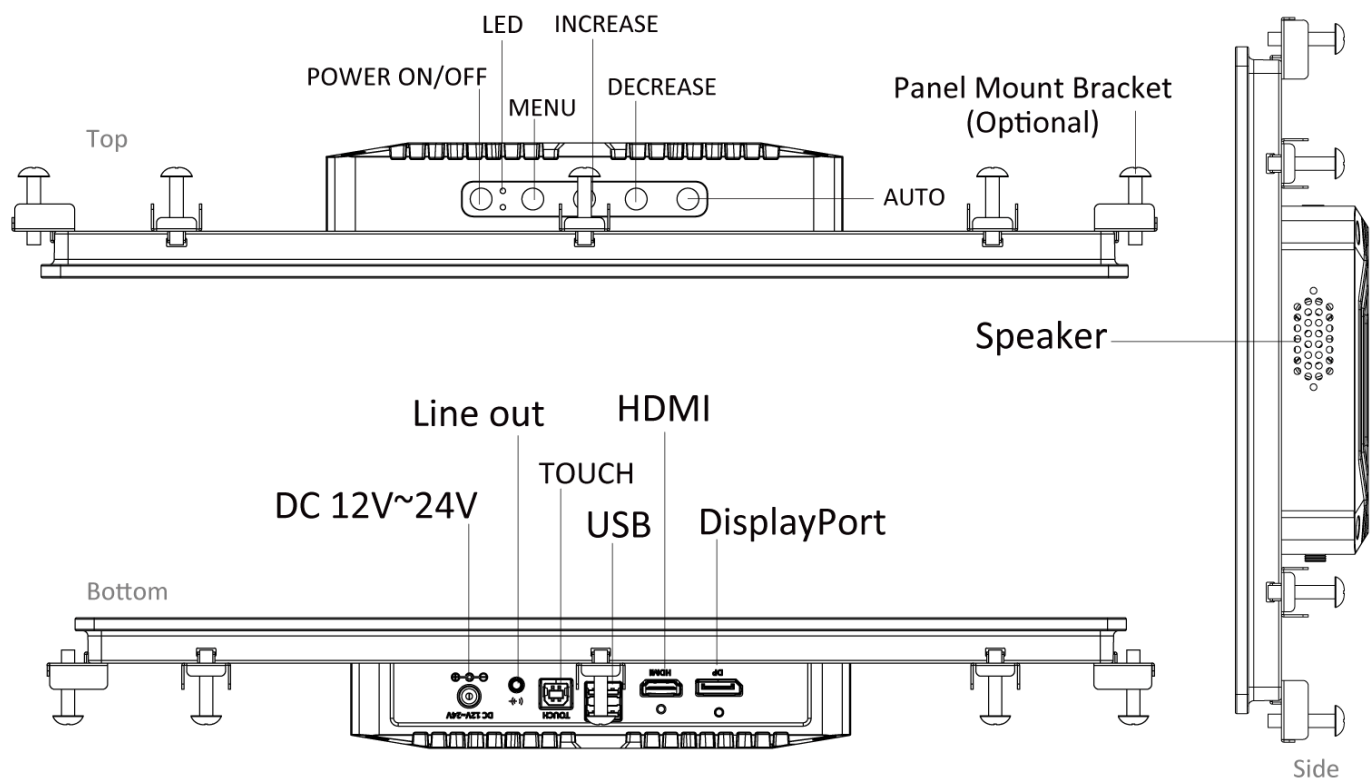

Dimension

Unit: mm

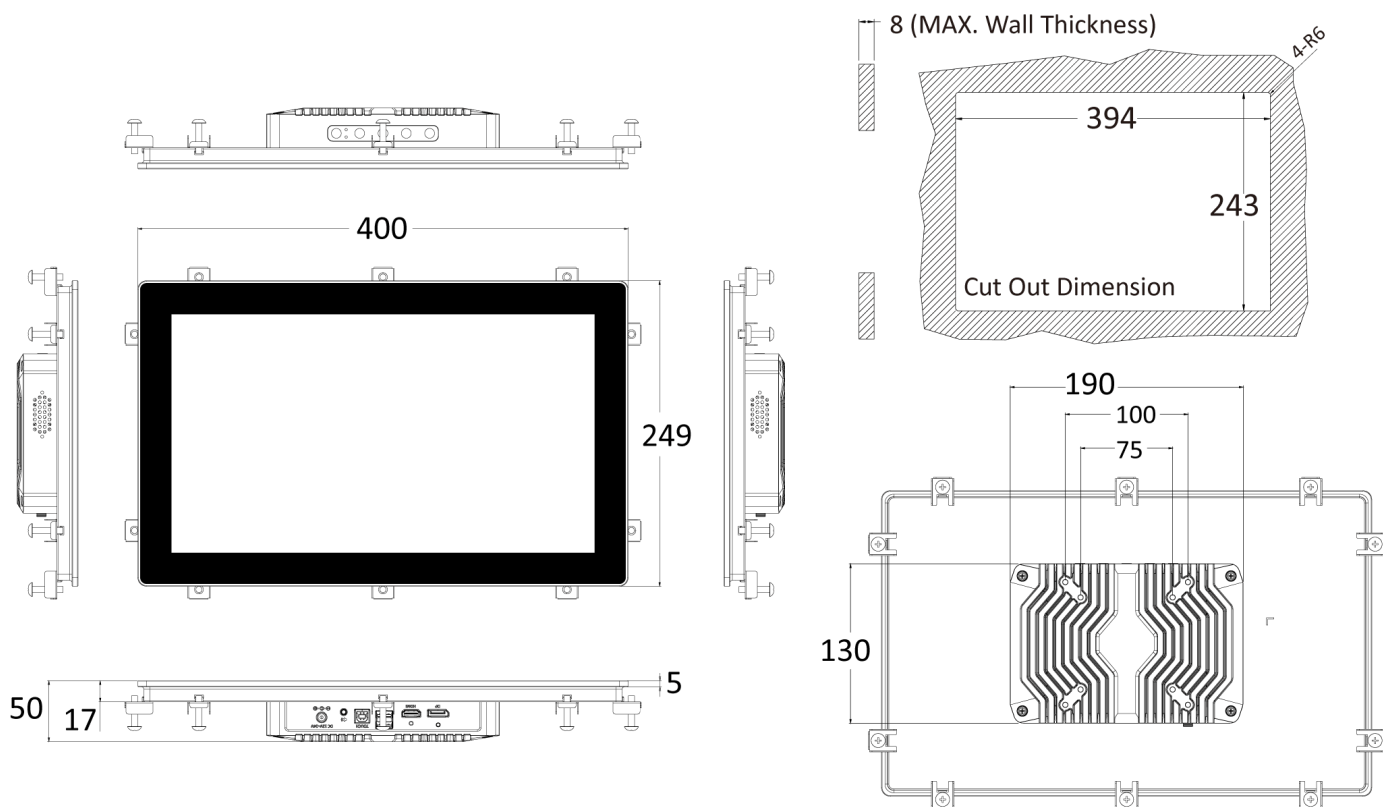

Compliances and Standards

Shock	3 Grms (5 - 500 Hz, 0.5 hr/axis) IEC60068-2-27:2008 Designed to comply with MIL-STD-810H Method 516.8 Procedure I
Vibration	20G half-sin 11ms IEC60068-2-64:2008 Designed to comply with MIL-STD-810H Method 514.8 Procedure I
Operating Temperature	0°C to 50°C IEC60068-2-1:2007 (Cold test procedure) IEC60068-2-2:2007 (Dry heat test procedure) IEC60068-2-3:2007 (Damp heat, steady state, test procedure) IEC60068-2-14:2009 (Wide temperature range thermal shock)
EMC	- FCC Class A (47 CFR part 15.109 and part 15.107) - CE - ICES-003 - UKCA - Industrial EMC Compliance - EN 61000-4-2: 2009 - EN IEC 61000-4-3: 2020 - EN 61000-4-4: 2012 - EN 61000-4-5: 2014 +A1: 2017 - EN 61000-4-6: 2014
Safety	- UL Safety: UL 62368-1, 3rd Ed., (cULus) - Test procedure: CB Scheme - Standard: IEC 62368-1:2018 - UL 50E, Type 12 (Indoor Industrial Enclosure Rating, Dust & Oil Resistant)
Environmental Compliance	- RoHS 3 (2015/863/EU) - REACH

Available Models

Model No.	Description
AIO-W215-MX-P	15.6" Full HD Capacitive Industrial Touchscreen Monitor, 1x HDMI, 1x Display Port, w/ Power Adapter
AIO-W215-MX	15.6" Full HD Capacitive Industrial Touchscreen Monitor, 1x HDMI, 1x Display Port

Optional Accessories

Model No.	Description
1-E09A06012	Adapter Output 12V 5A 60W / Input 100-240V
1-TDPP00006	3 ft. DP-DP cable
1-THDM00008	3 ft. HDMI-HDMI cable
1-TUSB00084	3 ft. USB 2.0 Type A - Type B touch cable
1-TPWR00118	3P Terminal Block(Female) To DC Plug 5.5x2.5 With Lock_100 mm_For AIO Series
1-ND800000100	3P male dinkle connector
3-AI156040S10	AIO-W215 Panel Mount Bracket Kit

Packing List

1x AIO-W215-MX Series Industrial Touchscreen Monitor
1x Adapter 60W 12V 5A (selected models only)
1x USB Cable
1x HDMI Cable

US Exports And Tariff Codes

ECCN	5A992.c
HTS	8528.52.0000
ScheduleB	84.71

Premio Inc.

918 Radecki Ct., City of Industry
CA 91748, United States
Toll Free: 800.977.3646

Premio Taiwan Inc.

18F, No.176, Jianyi Road, Zhonghe District,
New Taipei City 235603, Taiwan
Toll Free: 886.2.7731.7888

Email: sales@premioinc.com
Website: <https://premioinc.com>