



FANLESS MINI COMPUTER

BCO-500-MTL

Semi-Rugged Fanless Mini Computer with Intel® Core™ Ultra Processors, 2x DP, 3x USB, 1x Type C, 3x LAN, 1x 150W ADP



Features

- Supports Intel® Core™ Ultra Processors, Meteor Lake-U, TDP 15W
- 1x 262-pin DDR5 5600 SO-DIMM. Max. up to 48GB
- 3x Intel® 2.5 GbE
- Dual Independent Display: 2x DisplayPort
- 1x M.2 M Key for NVMe/SATA SSD (Default: 128GB)
- 1x M.2 B Key for 4G/5G/NVMe support, 1x M.2 E Key for Wifi/Bluetooth
- 1x SIM Socket
- 2x COM, 1x USB Type-C Gen 1, 2x USB 3.2 Gen 1, 1x USB 2.0
- Wide Operating Temperature: -20°C to 60°C
- dTPM 2.0 Supported
- Wide Voltage DC IN 12~24V

Specifications





System	
Processor	• Intel® Core™ Ultra 5 Processor 125U 12M Cache, up to 4.30 GHz (2+8+2 core), 15W • Intel® Core™ Ultra 7 Processor 155U 12M Cache, up to 4.80 GHz (2+8+2 core), 15W
System Chipset	SoC integrated
LAN Chipset	GbE1: Intel i226-LM 2.5GbE LAN PXE iAMT Support GbE2: Intel i226-V 2.5GbE LAN PXE iAMT Support GbE3: Intel i226-V 2.5GbE LAN PXE iAMT Support
Audio Codec	Realtek® ALC897 CODEC
System Memory	1x 262-Pin DDR5 5600 MT/s SO-DIMM. Max. up to 48GB (Non-ECC)
BIOS	AMI uEFI BIOS
Watchdog	Software Programmable Supports 1~255 sec. System Reset
TPM	fTPM 2.0, dTPM 2.0
Display	
Display Port	2x DP++ 1.4 up to 3040x2160 @60Hz
Multiple Display	2x Independent Displays
Storage	
M.2 M-Key	1x M.2 M Key (2280, PCIe x4 Gen 4/SATA) support for NVMe/SATA SSD (Default: 128GB)
Expansion	
M.2	1x M.2 B Key (3042/3052, PCIe x2+USB 3.0+USB 2.0) support for 4G/5G/NVMe 1x M.2 E Key (2230, PCIe+USB 2.0) for Wifi/Bluetooth
I/O	
DisplayPort	2x DisplayPort
COM	2x DB9 COM1: RS232/422/485 COM2: RS232
USB	1x USB 3.2 Type-C (5 Gbps) 2x USB 3.2 Gen 1 (5 Gbps) 1x USB 2.0
LAN	3x 2.5GbE RJ45
Audio	1x Line-Out +MIC
SIM	1x SIM Socket
DC-in Jack	1x DC IN Power Jack with Lock
Others	6x Antenna Holes 1x Power Button
Operating System	
Windows	Windows 10 / 11
Linux	Ubuntu 22.04 / 24.04 LTS
Power	
Power Adapter	AC/DC Adapter 20V/7.5A, 150W
Power Mode	AT, ATX (Default ATX)
Power Supply Voltage	12~24VDC
Power Connector	DC in Power Jack with Lock
Power Protection	OVP (Over Voltage Protection) OCP (Over Current Protection) Reverse Protection Surge Protection
Environment	
Operating Temperature	-20°C to 60°C
Storage Temperature	-20°C to 75°C
Relative Humidity	10% to 95% (non-condensing)
Certification	UL 62368 Ed. 3 CE, FCC Class A, UKCA

Vibration	With SSD: 5 Grms (5 - 500 Hz, 0.5 hr/axis)
Shock	With SSD: 50G half-sin 11ms

Physical	
Dimensions	225 x 130 x 48 mm
Weights	2 Kg
Construction	Extruded Aluminum with Heavy Duty Metal
Mounting Options	Wall Mounting VESA Mount (75mm x 75mm/100mm x 100mm) Din-Rail Mounting (Optional)


* All specifications and photos are subject to change without notice.

External I/O Mechanical Layout

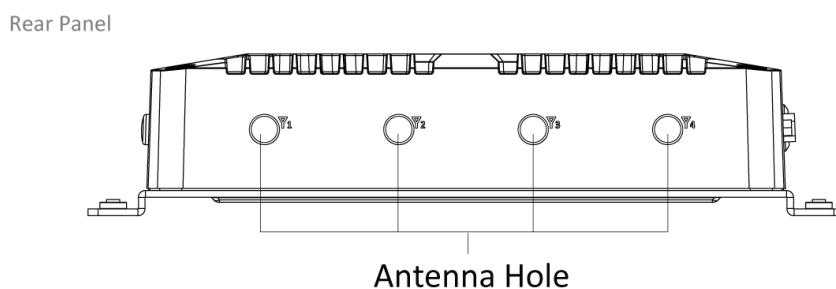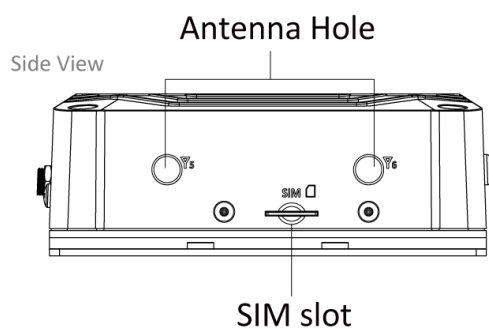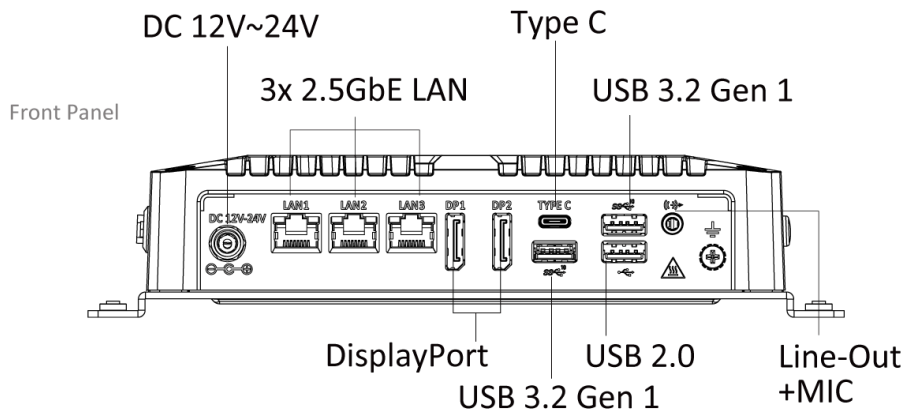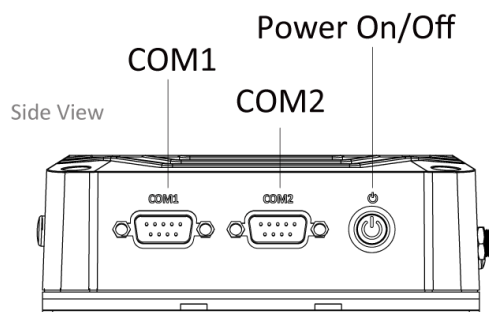

Dimension

Unit: mm

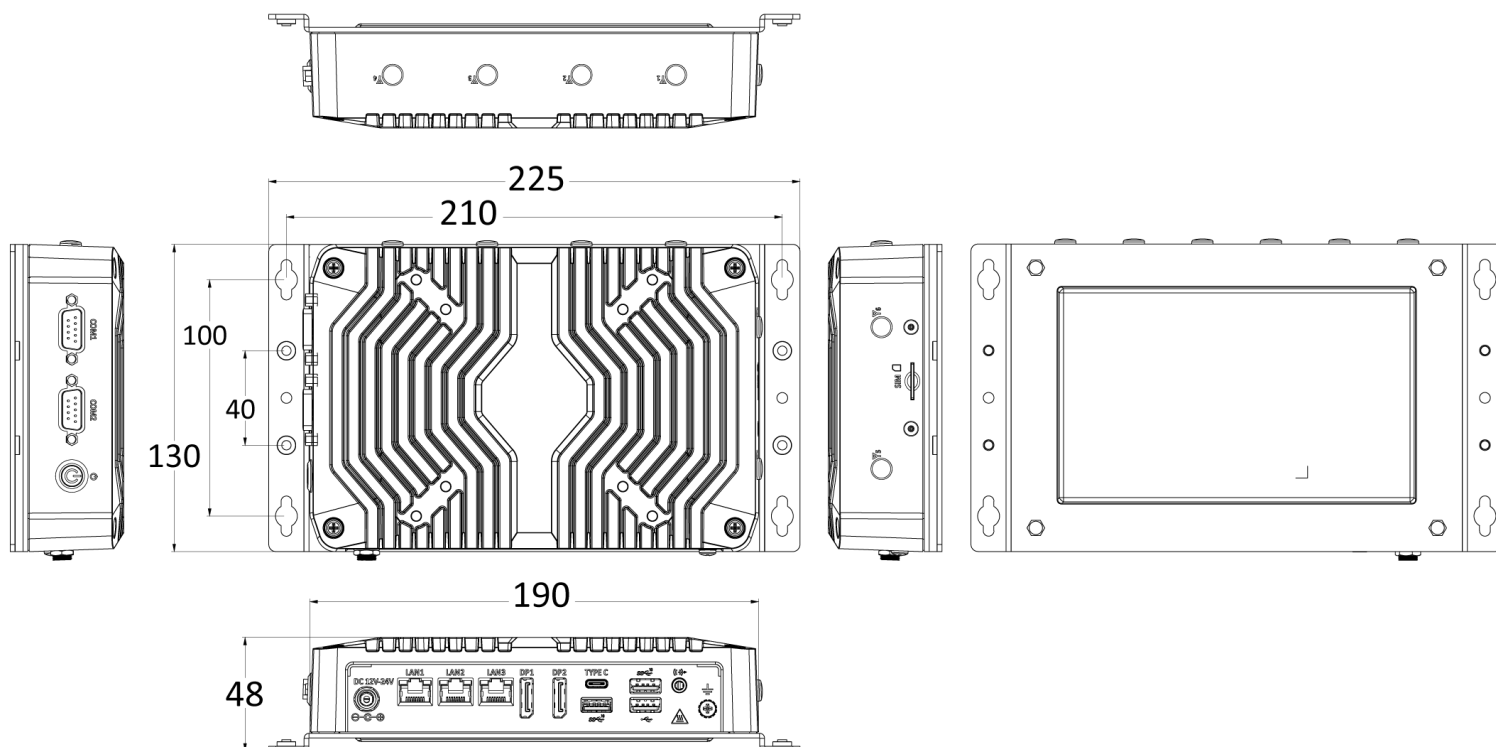

Compliances and Standards

Shock	With SSD: 5 Grms (5 - 500 Hz, 0.5 hr/axis) IEC60068-2-27:2008 Designed to comply with MIL-STD-810H Method 516.8 Procedure I
Vibration	With SSD: 50G half-sin 11ms IEC60068-2-64:2008 Designed to comply with MIL-STD-810H Method 514.8 Procedure I
Operating Temperature	-20°C to 60°C IEC60068-2-1:2007 (Cold test procedure) IEC60068-2-2:2007 (Dry heat test procedure) IEC60068-2-3:2007 (Damp heat, steady state, test procedure) IEC60068-2-14:2009 (Wide temperature range thermal shock)
EMC	- FCC Class A (47 CFR part 15.109 and part 15.107) - CE - ICES-003 - UKCA - Industrial EMC Compliance - EN 61000-4-2: 2009 - EN IEC 61000-4-3: 2020 - EN 61000-4-4: 2012 - EN 61000-4-5: 2014 +A1: 2017 - EN 61000-4-6: 2014
Safety	- UL Safety: UL62368-1, 3rd Ed., (cULus) - Test procedure: CB Scheme - Standard: IEC 62368-1:2018
Environmental Compliance	- RoHS 3 (2015/863/EU) - REACH

Available Models

Model No.	Description
BCO-500-MTL-125U-P	Fanless Mini Industrial Computer with Intel® Core™ Ultra 5 125U Processors, 2x DP, 3x USB, 1x Type C, 3x LAN, 1x 150W ADP, w/ Power Adapter
BCO-500-MTL-155U-P	Fanless Mini Industrial Computer with Intel® Core™ Ultra 7 155U Processors, 2x DP, 3x USB, 1x Type C, 3x LAN, 1x 150W ADP, w/ Power Adapter

Optional Accessories

Model No.	Description
1-TPCD00008	AC Power Cord, 3-pin US Type, 183cm
1-TPCD00009	AC Power Cord, 3-pin EU Type, 183cm
1-TPCD00011	AC Power Cord, 3-pin UK Type, 183cm
3-BC5AD110S10-S0	Din-Rail Mounting Kit

Packing List

1x BCO-500-MTL Series Fanless Mini Computer
1x 150W Power Adapter
1x Accessory Kit

US Exports And Tariff Codes

ECCN	5A992.c
HTS	8471.50.0150
ScheduleB	84.71

Premio Inc.

918 Radecki Ct., City of Industry
CA 91748, United States
Toll Free: 800.977.3646

Premio Taiwan Inc.

18F, No.176, Jianyi Road, Zhonghe District,
New Taipei City 235603, Taiwan
Toll Free: 886.2.7731.7888

Email: sales@premioinc.com
Website: <https://premioinc.com>