



RUGGED EMBEDDED COMPUTER

RCO-1000-EHL-20

Fanless Mini Computer with Intel® Atom® X6425E Processor, 2x DP, 2x COM, 1x 2.5" SATA HDD Bay

Features

- Support Intel® Atom® X6425E
- 1x 260-pin DDR4 SODIMM. Max. up to 32GB
- Dual Independent Display by 2x Display Port
- 1x 2.5GbE, 1x GbE supporting (Wake-on-LAN and PXE)
- 1x 2.5" SATA HDD Bay, 1x mSATA,
- 1x M.2 (B Key, 2242/3042/3052, Support 4G/5G)
- 1x Full-size mini PCIe for communication or expansion modules
- 2x RS-232/422/485, 3x USB 3.2 Gen2, 1x USB 2.0
- 9 to 36VDC Wide Range Power Input Supporting AT/ATX Mode
- Wide Operating Temperature -40°C to 70°C
- TPM 2.0 Supported
- With 3x Universal Expansion Slots
- Edge AI Ready with Hailo-8™ (26 TOPS / 2.5W)
- UL Listed



Specifications


System	
Processor	Supports 11th Gen Intel® Atom® Processor (Elkhart Lake) - Intel® Atom® Processor X6425E, Quad Core, 1.5 MB Cache, 1.8 GHz, 12W TDP
System Chipset	SoC integrated
LAN Chipset	1 GbE1: Intel I210 (Support Wake-on-LAN and PXE) 2.5 GbE2: Intel I225 (Support Wake-on-LAN and PXE)
Audio Codec	Realtek ALC888S
System Memory	1x 260-Pin DDR4 2400/2667/3200MT/s SODIMM. Max. up to 32 GB
Graphics	Intel® UHD Graphics
BIOS	AMI 256Mbit SPI BIOS
Watchdog	Software Programmable Supports 1~255 sec. System Reset
AI Accelerator	Supports 1x Hailo-8™ module
TPM	TPM 2.0
Display	
Display Port	2x DisplayPort 1.4, DP++ (4096 x 2160@60Hz)
Multiple Display	Dual Display
Storage	
M.2	1x M.2 (B Key, 2242/3042/3052, PCIe1 + USB 3.2 Gen2, Support 4G/5G Module)
mSATA	1x mSATA (shared by 1x Mini PCI Express)
SIM Socket	2x External SIM socket
SSD/HDD	1x Internal 2.5" SATA HDD Bay (support H=9.5 mm)
Expansion	
Mini PCIe	1x Full-size Mini PCIe
Expansion Modules	
Optional:	
• 2-port COM module with Super I/O Chipset, Support 2x Universal Slot Only	
• 4-Port USB module with USB hub, Support 1x Universal Slot Only	
• 1-Port DP 1.4 and DIO (4 in / 4 out, Isolated), Support 1x Universal Slot Only	
• 1-Port HDMI 2.0, Support 1x Universal Slot Only	
I/O	
Audio	1x Mic-in, 1x Line-out
CAN	2x CAN 2.0 A/B 2-pin Internal header
COM	2x RS-232/422/485
LAN	2x RJ45 (2.5 & 1 GbE)
Universal I/O Bracket	3x Universal I/O Bracket (By mini PCIe interface, Proprietary Module)
USB	3x USB 3.2 Gen 2 (10 Gbps) 1x USB 2.0
Others	5x WiFi Antenna Holes 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off 1x Internal CMOS Battery Cable 1x 4-PIN FAN Connector
Operating System	
Windows	Windows 10/11
Linux	Linux Kernel
Power	
Power Adapter	Optional AC/DC 12V/5A, 60W
Power Mode	AT, ATX
Power Ignition Sensing	Adjustable power ignition management can be achieved through BIOS and optional daughter board.
Power Supply Voltage	9~36VDC
Power Connector	3-pin Terminal Block

Power Protection	OVP (Over Voltage Protection); OCP (Over Current Protection) Reverse Protection
------------------	---

Environment	
Operating Temperature	-40°C to 70°C
Storage Temperature	-40°C to 85°C
Relative Humidity	10% to 95% (non-condensing)
Certification	UL 62368 Ed. 3, CE, FCC Class A
Vibration	With SSD: 5 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis
Shock	With SSD: 50G, half sine, 11ms
Physical	
Dimensions	150 (W) x 105 (D) x 65 (H) mm
Weights	1 kg
Construction	Extruded Aluminum with Heavy Duty Metal
Mounting Options	Wall Mounting SIDE / VESA / DIN-Rail Mounting (Optional)

- For Intel® Atom® Processor x6425E operating temperature limited -40°C to 70°C
- Intel CPUs may experience thermal throttling depending on extreme application workloads; this is also due to an increase in the physical CPU cores from the Intel silicon (up to 4 cores). Please note, this does not indicate system malfunction or problems in the fanless design. Please consult our embedded engineers for the best configuration to match your application requirements.
- All specifications and photos are subject to change without notice.

External I/O Mechanical Layout

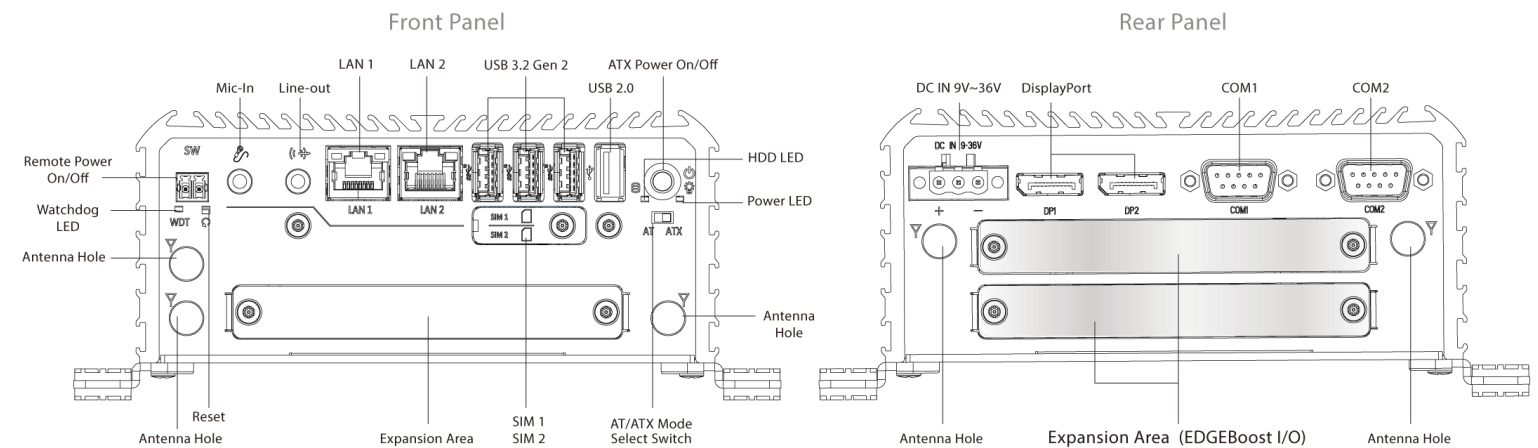


Available EDGEBoost I/O for Rear Panel



- 1x DP Port and 1x DIO (4 in / 4 out, Isolated)
(Support 1x Universal Slot Only)



- 4x USB Ports
(Support 1x Universal Slot Only)




- 1x HDMI Port
(Support 1x Universal Slot Only)



- 2x COM Ports
(Support 2x Universal Slot Only)

Dimension

Unit: mm

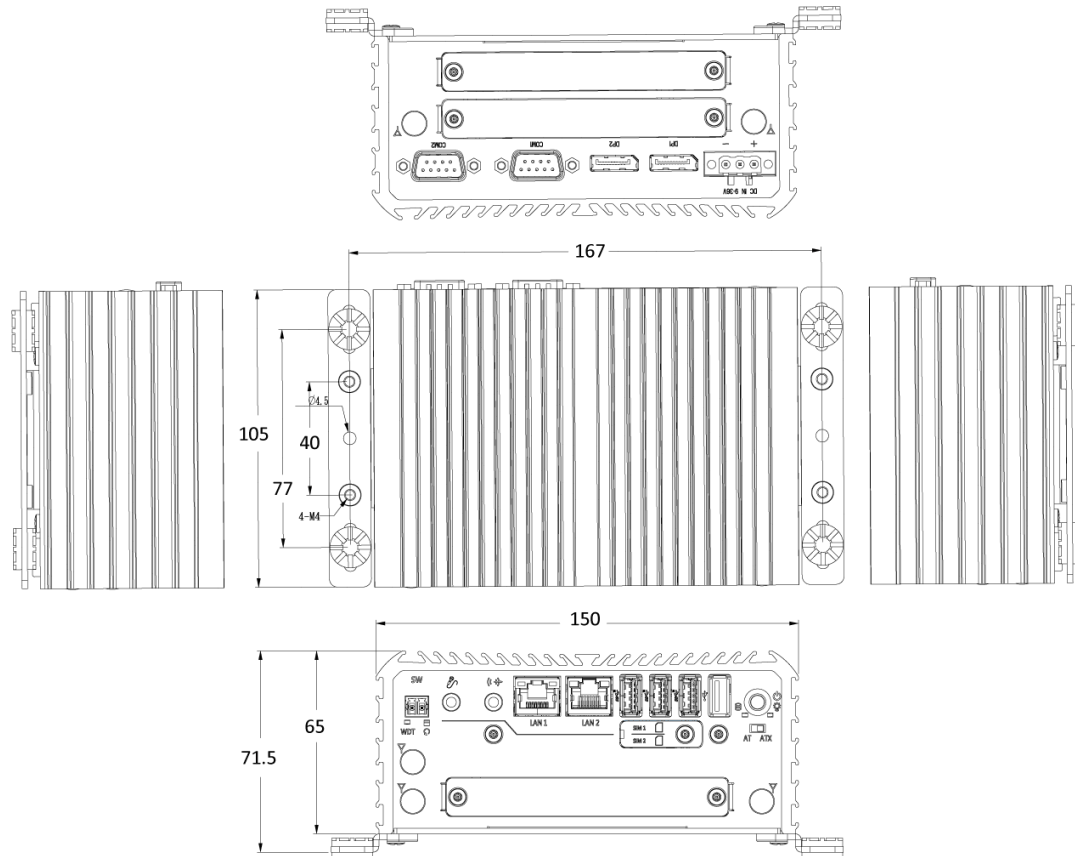

Compliances and Standards

Shock	With SSD: 50G, half sine, 11ms IEC60068-2-27:2008 Designed to comply with MIL-STD-810H Method 516.8 Procedure I
Vibration	With SSD: 5 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis IEC60068-2-64:2008 Designed to comply with MIL-STD-810H Method 514.8 Procedure I
Operating Temperature	-40°C to 70°C IEC60068-2-1:2007 (Cold test procedure) IEC60068-2-2:2007 (Dry heat test procedure) IEC60068-2-3:2007 (Damp heat, steady state, test procedure) IEC60068-2-14:2009 (Wide temperature range thermal shock)
EMC	- FCC Class A - CE - ICES-003 - UKCA - Industrial EMC Compliance - EN 61000-4-2: 2009 - EN IEC 61000-4-3: 2020 - EN 61000-4-4: 2012 - EN 61000-4-5: 2014 +A1: 2017 - EN 61000-4-6: 2014
Safety	- UL Safety: UL62368-1, 3rd Ed., (cULus) - Test procedure: CB Scheme - Standard: IEC 62368-1:2018

Available Models

Model No.	Description
RCO-1000-EHL-X6425E-20-P	Fanless Mini PC with Intel® Atom® X6425E (EHL) Processor, 2x EDGEBoost IO, w/ Power Adapter
RCO-1000-EHL-X6425E-20C-P	Fanless Mini PC with Intel® Atom® X6425E (EHL) Processor, DIO, 1x DP, 4x COM, w/ Power Adapter
RCO-1000-EHL-X6425E-20D-P	Fanless Mini PC with Intel® Atom® X6425E (EHL) Processor, 6x COM, w/ Power Adapter

Optional Accessories

Model No.	Description
1-E09A06008	Adapter AC/DC 12V 5A 60W with 3pin Terminal Block Plug 5.0mm Pitch
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm
1-TPCD00005	Power Cord, 3-pin US Type, 180cm
3-SIDE-0003	RCO-1000-EHL-20 Series Side Mount Kit
3-VESA-0003	RCO-1000 Series VESA Mount Kit
3-DINR-0004	Din Rail-2 Mounting Kit
3-RC1200IGKIT-S0	MOD, PWR IGNITION, KIT, 1000-EHL
1000-EHL-20-5G-KIT	MOD, RCO-1000-EHL-20, 5G, THALES, KIT
1000-EHL-20-NVME-KIT	MOD, RCO-1000-EHL-20, NVME, KIT
1000-EHL-20-TPU-KIT	MOD, RCO-1000-EHL-20, TPU, HAILO-8, KIT
EBIO-2COM-34	MOD, EBIO, 2XCOM, 3, 4, 1000-EHL
EBIO-2COM-56	MOD, EBIO, 2XCOM, 5, 6, 1000-EHL
EBIO-4USB	MOD, EBIO, 4XUSB2.0, 1000-EHL
EBIO-DP-DIO	MOD, EBIO, DP, DIO, 4IN, 4OUT, 1000-EHL
EBIO-HDMI	MOD, EBIO, HDMI, 1000-EHL

Packing List

1x RCO-1000-EHL-20 Series Embedded System
1x Wall Mount Kit

US Exports And Tariff Codes

ECCN	5A992.c
HTS	8471.50.0150
ScheduleB	84.71

Premio Inc.

918 Radecki Ct., City of Industry
CA 91748, United States
Toll Free: 800.977.3646

Premio Taiwan Inc.

18F, No.176, Jianyi Road, Zhonghe District,
New Taipei City 235603, Taiwan
Toll Free: 886.2.7731.7888

Email: sales@premioinc.com
Website: <https://premioinc.com>