



WATERPROOF COMPUTER

WCO-3000-EHL

Advanced IP68/69K Waterproof Computer with Intel Atom® CPU, 1x DP, 2x LAN, 2x USB 3.2 Gen 2

Features

- Support Intel Atom® x6425E Processor
- 1x 260-pin DDR4 SODIMM. Max up to 32GB
- Single display supported by 1x Real 4K DisplayPort
- 2x LAN by M12 X-Code (2.5GbE and 1GbE)
- 1x RS-232/422/485 by M12 A-Code, 2x USB 3.2 Gen 2 (waterproof connector)
- 1x 2.5" SATA HDD bay and 1x mSATA (shared by 1x Mini PCIe)
- 1x Full-size mini PCIe for communication or expansion modules, 2x Internal SIM socket
- Full system IP68/69K level dustproof & waterproof
- 9 to 36VDC / 48 to 110VDC wide range power input supporting AT/ATX mode
- -40°C to 60°C extended operating temperature
- TPM 2.0 Supported
- Edge AI Ready with Hailo-8™ (26 TOPS / 2.5W)



Specifications


System	
Processor	Supports 11th Gen Intel® Atom® Processors X Series (Elkhart Lake) - Intel® Atom® Processor x6425E, Quad Core, 1.5 MB Cache, 2.0 GHz, 12W TDP
System Chipset	SoC integrated
LAN Chipset	1 GbE1: Intel I210 (Support Wake-on-LAN and PXE) 2.5 GbE2: Intel I225 (Support Wake-on-LAN and PXE)
Audio Codec	Realtek ALC888S
System Memory	1x 260-Pin DDR4 2400/2667/3200MT/s SODIMM. Max. up to 32 GB (non-ECC)
Graphics	Intel® UHD Graphics
BIOS	AMI 256Mbit SPI BIOS
Watchdog	Software Programmable Supports 1~255 sec. System Reset
AI Accelerator	Supports 1x Hailo-8™ module
TPM	TPM 2.0
Display	
Display Port	1x DisplayPort 1.4, DP++ (4096 x 2160@60Hz) or 1x HDMI (Optional)
Multiple Display	Single Display
Storage	
mSATA	1x mSATA shared by 1x Mini PCI Express
SSD/HDD	1x Internal 2.5" SATA HDD Bay
Expansion	
M.2	1x M.2 (B Key, 3042/3052, PCIe x 1 + USB 3.2 Gen2, Support 4G/5G/Hailo AI Module)
SIM Socket	2x Internal SIM socket
Mini PCIe	1x Full-size Mini PCIe
I/O	
Audio	Internal 1x Mic-in, 1x Line-out
CAN	2x CAN 2.0 A/B 2-pin Internal header
COM	1x RS-232/422/485 by M12 A-Code
LAN	2x RJ45 by M12 X-Code
Universal I/O Bracket	2x M12 Waterproof Cover for I/O Expansion
USB	2x USB 3.2 Gen 2 Type A (Waterproof)
Others	5x WiFi Antenna Holes 1x Power Switch 1x AT/ATX Switch, Internal 1x Remote Power On/Off, Internal 1x Internal CMOS Battery Cable
Operating System	
Windows	Windows 10
Linux	Linux kernel 5.X
Power	
Power Adapter	Optional AC/DC 12V/5A, 60W Optional AC/DC 12V/6.67A, 80W for PoE
Power Mode	AT, ATX
Power Ignition Sensing	Power Ignition Management (Optional)
Power Supply Voltage	DC IN 9~36V DC IN 48~110V, Optional
Power Connector	M12 S-Code 4-Pin
Power Protection	OVP (Over Voltage Protection) OCP (Over Current Protection) Reverse Protection
Environment	
Operating Temperature	-40°C to 60°C
Storage Temperature	-40°C to 85°C

Relative Humidity	10% to 95% (non-condensing)
Certification	CE, FCC Class A, IP68, IP69K
Vibration	IEC60068-2-64:2008 With HDD: 1 Grms (5 - 500 Hz, 0.5 hr/axis) With SSD: 5 Grms (5 - 500 Hz, 0.5 hr/axis) Designed to comply with MIL-STD-810H Method 514.8 Procedure I
Shock	IEC60068-2-27:2008 With SSD: 50G half-sin 11ms Designed to comply with MIL-STD-810H Method 516.8 Procedure I
Physical	
Dimensions	231 (W) x 292 (D) x 57 (H) mm
Construction	Extruded Aluminum with Heavy Duty Metal
Mounting Options	Wall Mounting


* All specifications and photos are subject to change without notice.

External I/O Mechanical Layout

Front Panel

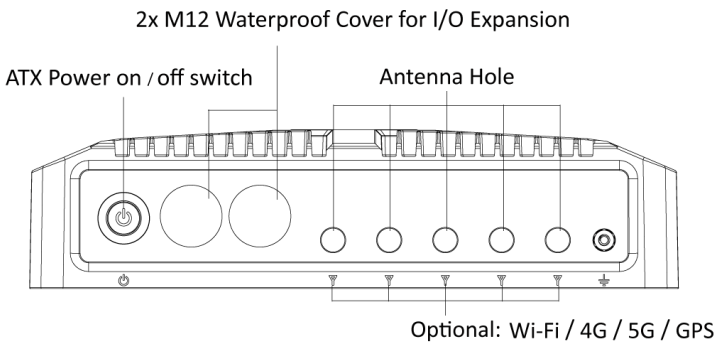

Rear Panel

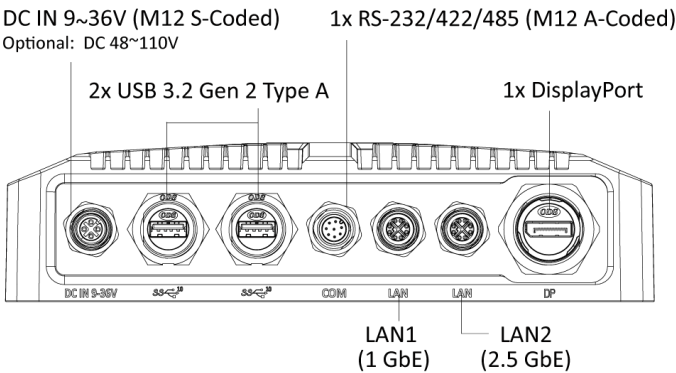


Optional Configurations for Additional Features

Model	HDMI	2 PoE	AI Hailo / 5G	IGN
WCO-3000-EHL	✓	✓	✓ Select One	✓
WCO-3000-EHL-110V	✓ Select One			

Dimension

Unit: mm

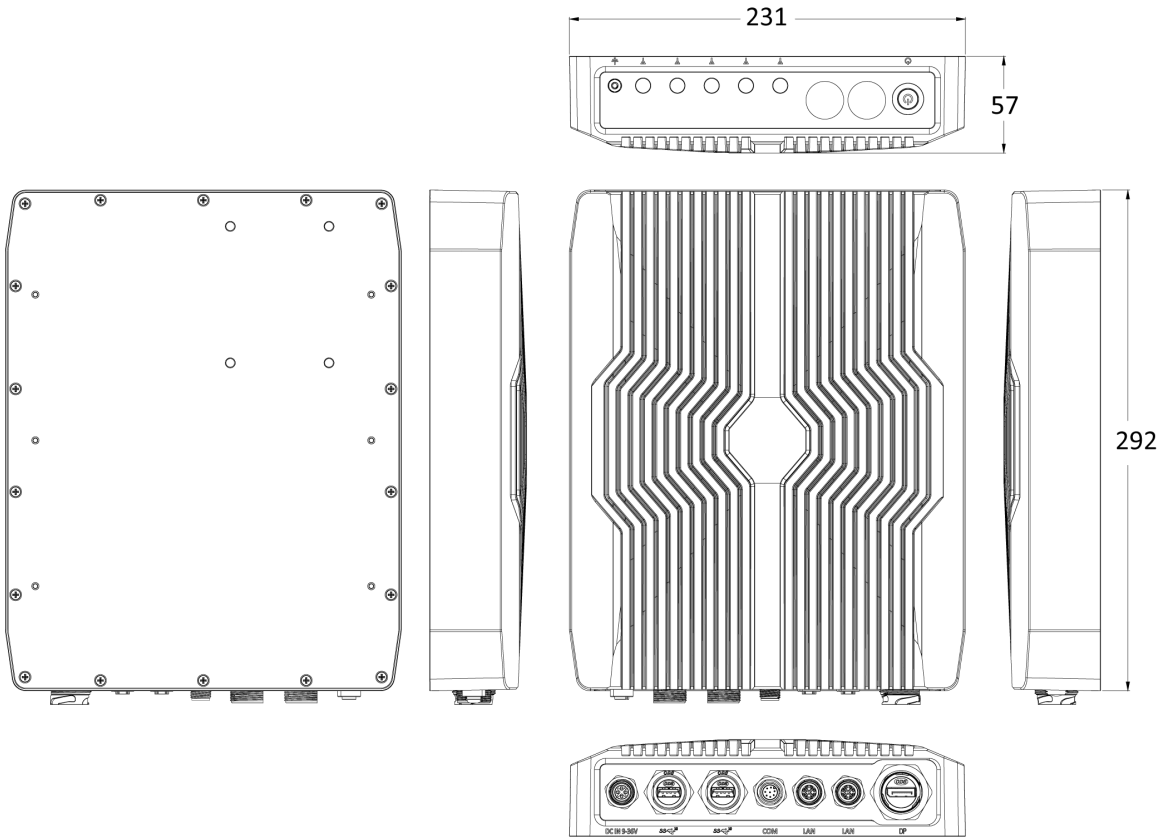

Compliances and Standards

Shock	IEC60068-2-27:2008 With SSD: 50G half-sin 11ms Designed to comply with MIL-STD-810H Method 516.8 Procedure I IEC60068-2-27:2008 Designed to comply with MIL-STD-810H Method 516.8 Procedure I
Vibration	IEC60068-2-64:2008 With HDD: 1 Grms (5 - 500 Hz, 0.5 hr/axis) With SSD: 5 Grms (5 - 500 Hz, 0.5 hr/axis) Designed to comply with MIL-STD-810H Method 514.8 Procedure I IEC60068-2-64:2008 Designed to comply with MIL-STD-810H Method 514.8 Procedure I
Operating Temperature	-40°C to 60°C IEC60068-2-1:2007 (Cold test procedure) IEC60068-2-2:2007 (Dry heat test procedure) IEC60068-2-3:2007 (Damp heat, steady state, test procedure) IEC60068-2-14:2009 (Wide temperature range thermal shock)
EMI	- FCC Class A (47 CFR part 15.109 and part 15.107) - CE - ICES-003 - UKCA

Available Models

Model No.	Description
WCO-3000-EHL-x6425E	IP68/69K Waterproof System with Intel® Atom® Processor x6425E, 8GB RAM, 256GB SSD, 1x DP, 2x LAN, 2x USB 3.2 Gen 2
WCO-3000-EHL-x6425E-P	IP68/69K Waterproof System with Intel® Atom® Processor x6425E, 8GB RAM, 256GB SSD, 1x DP, 2x LAN, 2x USB 3.2 Gen 2, w/ Power Adapter

Optional Accessories

Model No.	Description
1-E09A08002	Adapter AC/DC 12V 6.67A 80W with 3pin Terminal Block Plug 5.0mm Pitch
1-E09A06008	Adapter AC/DC 12V 5A 60W with 3pin Terminal Block Plug 5.0mm Pitch
1-TPCD00005	Power Cord, 3-pin US Type, 1.8M
1-TPCD00001	Power Cord, 3-pin UK Type, 1.8M
1-TPCD00002	Power Cord, European Type, 1.8M
1-TDPP00003	External Waterproof M12 DisplayPort Cable 1.6M
1-TXXX00012	External Waterproof M12 S-CODE 4P PWR Cable 1.5M
1-TUSB00016	External Waterproof M12 USB 3.0 Cable 1.5M
1-TCOM00011	External Waterproof M12 A-CODE 8P COM Cable 1.5M
1-TLAN00006	External Waterproof M12 X-CODE 8P LAN Cable 1.5M
1-THDM00002	External Waterproof M12 HDMI Cable 1.6M

Packing List

1x WCO-3000-EHL
1x Wall Mount Kit
1x Waterproof Connector Cover Set

US Exports And Tariff Codes

ECCN	5A992.c
HTS	8471.50.0150
ScheduleB	84.71

Premio Inc.

918 Radecki Ct., City of Industry
CA 91748, United States
Toll Free: 800.977.3646

Premio Taiwan Inc.

18F, No.176, Jianyi Road, Zhonghe District,
New Taipei City 235603, Taiwan
Toll Free: 886.2.7731.7888

Email: sales@premioinc.com
Website: <https://premioinc.com>