

USER'S MANUAL

BCO-1000 Series
Embedded Fanless Mini PC



Table of Contents

Prefaces	04
Revision	04
Disclaimer	04
Copyright Notice	04
Trademarks Acknowledgment	04
Environmental Protection Announcement	04
Safety Precautions	05
Technical Support and Assistance	06
Conventions Used in this Manual	06
Package Contents	07
Ordering Information	07
Optional Accessory	07
Chapter 1 Product Introductions	08
1.1 Overview	09
1.1.1 Key Feature	09
1.2 Hardware Specification	10
1.3 System I/O	11
1.3.1 BCO-1000	11
1.3.2 BCO-1010 / BCO-1010A / BCO-1010B	13
1.3.3 BCO-1020C / BCO-1020D	15
1.3.4 BCO-1030	17
1.4 Mechanical Dimension	19
1.4.1 RCO-1000	19
1.4.2 RCO-1010 / RCO-1010A / RCO-1010B	20
1.4.3 RCO-1020C / RCO-1020D	21
1.4.4 RCO-1030	22
Chapter 2 Switches and Connectors	23
2.1 Switch and connector Locations	24
2.1.1 Top View	24
2.1.2 Bottom View	25
2.1.3 Daughterboard view	25
2.2 Connector / Switch Definition	26
2.3 Switch Definitions	27
2.4 Connector Definitions	27
Chapter 3 System Setup	36
3.1 Set torque force to 3.5 kgf-cm to execute all the screwing and unscrewing	37
3.2 Removing chassis bottom cover	37
3.3 Installing SODIMM	38
3.4 Installing SATA HDD/SSD	40
3.5 Installing Mini PCIe card / mSATA	42
3.6 Installing antenna	43
3.7 ssemble chassis bottom cover	45
3.8 Installing SIM card	46

Chapter 4	BIOS Setup	47
4.1	BIOS Introduction	48
4.2	Main Setup	49
4.2.1	System Date	49
4.2.2	System Time	49
4.3	Advanced Setup	50
4.3.1	Trusted Computing (Optional)	50
4.3.2	ACPI Settings	51
4.3.3	Super IO Configuration	52
4.3.4	Hardware Monitor	56
4.3.5	Serial Port Console Redirection	56
4.3.6	CPU Configuration	57
4.3.7	PPM Configuration	58
4.3.8	SATA Configuration	59
4.3.9	OS Selection	59
4.3.10	CSM Configuration	60
4.3.11	USB Configuration	61
4.4	Chipset	62
4.4.1	North Bridge	62
4.4.2	South Bridge	64
4.5	Security	66
4.5.1	Administrators Password	66
4.5.2	Users Password	66
4.6	Boot	67
4.6.1	Setup Prompt Timeout	67
4.6.2	Bootup NumLock State	67
4.6.3	Full Screen Logo Show	67
4.6.4	Boot Option Priorities	67
4.7	Save & Exit	68
4.7.1	Save Changes and Reset	68
4.7.2	Discard Changes and Reset	68
4.7.3	Restore Defaults	68
4.7.4	Save as User Defaults	68
4.7.5	Restore User Defaults	68
Appendix	WDT & GPIO	69
	WDT Sample Code	70
	GPIO Sample Code	71

Prefaces

Revision

Revision	Description	Date
1.0	Manual Released	2018/01/15
1.1	Added WDT and GPIO Sample Code	2018/02/09

Disclaimer

All specifications and information in this User's Manual are believed to be accurate and up to date. Premio Inc. does not guarantee that the contents herein are complete, true, accurate or non-misleading. The information in this document is subject to change without notice and does not represent a commitment on the part of Premio Inc.

Premio Inc. disclaims all warranties, express or implied, including, without limitation, those of merchantability, fitness for a particular purpose with respect to contents of this User's Manual. Users must take full responsibility for the application of the product.

Copyright Notice

All rights reserved. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or information storage and retrieval systems, without the prior written permission of Premio Inc. Copyright © Premio Inc.

Trademarks Acknowledgment

Intel®, Celeron® and Pentium® are trademarks of Intel Corporation.

Windows® is registered trademark of Microsoft Corporation.

AMI is trademark of American Megatrend Inc.

IBM, XT, AT, PS/2 and Personal System/2 are trademarks of International Business Machines Corporation

All other products and trademarks mentioned in this manual are trademarks of their respective owners.

Environmental Protection Announcement

Do not dispose this electronic device into the trash while discarding. Please recycle to minimize pollution and ensure environment protection.



Safety Precautions

Before installing and using the equipment, please read the following precautions:

- Put this equipment on a reliable surface during installation. Dropping it or letting it fall could cause damage.
- The power outlet shall be installed near the equipment and shall be easily accessible.
- Turn off the system power and disconnect the power cord from its source before making any installation. Be sure both the system and the external devices are turned OFF. Sudden surge of power could ruin sensitive components. Make sure the equipment is properly grounded.
- When the power is connected, never open the equipment. The equipment should be opened only by qualified service personnel.
- Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
- Disconnect this equipment from the power before cleaning. Use a damp cloth. Do not use liquid or spray detergents for cleaning.
- Avoid the dusty, humidity and temperature extremes.
- Do not place heavy objects on the equipment.
- If the equipment is not used for long time, disconnect it from the power to avoid being damaged by transient over-voltage.
- The storage temperature shall be above -30°C and below 70°C.
- The computer is provided with a battery-powered real-time clock circuit. There is a danger of explosion if incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.
- If one of the following situation arises, get the equipment checked be service personnel:
 - The power cord or plug is damaged.
 - Liquid has penetrated into the equipment.
 - The equipment has been exposed to moisture.
 - The equipment does not work well or it cannot work according the user's manual.
 - The equipment has been dropped and damaged.
 - The equipment has obvious signs of breakage.

Technical Support and Assistance

1. Visit the Premio Inc. website at www.premioinc.com where you can find the latest information about the product.
2. Contact your distributor, our technical support team or sales representative for technical support if you need additional assistance. Please have following information ready before you call:
 - Model name and serial number
 - Description of your peripheral attachments
 - Description of your software (operating system, version, application software, etc.)
 - A complete description of the problem
 - The exact wording of any error messages

Conventions Used in this Manual

**WARNING**

This indication alerts operators to an operation that, if not strictly observed, may result in severe injury.

**CAUTION**

This indication alerts operators to an operation that, if not strictly observed, may result in safety hazards to personnel or damage to equipment.

**NOTE**

This indication provides additional information to complete a task easily.

Package Contents

Before installation, please ensure all the items listed in the following table are included in the package.

Item	Description	Q'ty
1	BCO-1000 Series Embedded Fanless Mini PC	1
2	Utility DVD Driver	1
3	Accessory Kit	1
4	DVI to VGA Adapter	1

Ordering Information

Model No.	Product Description
BCO-1000-J1900	Embedded Fanless Mini PC with Intel® Celeron® J1900 Processor, 1x DVI-I, 2x COM
BCO-1010-J1900	Embedded Fanless Mini PC with Intel® Celeron® J1900 Processor, 1x DVI-I, 2x COM, 1x 2.5" SATA HDD Bay
BCO-1010A-J1900	Embedded Fanless Mini PC with Intel® Celeron® J1900 Processor, 1x DVI-I, 1x DP, 2x COM, 1x 2.5" SATA HDD Bay
BCO-1010B-J1900	Embedded Fanless Mini PC with Intel® Celeron® J1900 Processor, 1x DVI-I, 4x COM, 1x 2.5" SATA HDD Bay
BCO-1020C-J1900	Embedded Fanless Mini PC with Intel® Celeron® J1900 Processor, 1x DVI-I, 1x DP, 4x COM, 1x 2.5" SATA HDD Bay
BCO-1020D-J1900	Embedded Fanless Mini PC with Intel® Celeron® J1900 Processor, 1x DVI-I, 6x COM, 1x 2.5" SATA HDD Bay
BCO-1030-J1900	Embedded Fanless Mini PC with Intel® Celeron® J1900 Processor, 1x DVI-I, 1x DP, 6x COM, 1x 2.5" SATA HDD Bay

Optional Accessories

Model No.	Product Description
1-E09A06002	Adapter AC/DC 12V 5A 60W with 3pin Terminal Block Plug 5.0mm Pitch
SFICBL022	Power Cord, 3-pin US Type, 180cm
1-TPCD00002	Power Cord, European Type, 180cm
1-TPCD00001	Power Cord, 3-pin UK Type, 180cm

Chapter 1

Product Introductions

1.1 Overview

BCO-1000 series powered by Intel® Celeron® Processor J1900 2.0GHz SoC, which delivers increased performance by up to 150% compared to previous Atom® platforms and low power consumption. The BCO-1000 series is compatible for applications that need a basic and simple but dependable solution. It is an ideal preference as an economical entry-level for diverse applications in computing functionality such as market application in industrial automation, industrial control, Kiosk & retail and digital signage.

This price-friendly fanless embedded system supports system memory up to 8 GB with one DDR3L-1066/1333 SO-DIMM socket and features an onboard DVI-I display interface to provide further VGA/DVI-D connection to deliver Ultra HD smooth visual display. The BCO-1000 series is equipped with one internal 2.5" SATA HDD bays and one mSATA (shared by 1x Mini PCIe) to provide sufficient storage. It also comes with one full-size mini PCIe socket with USIM socket (PCIe + USB + SATA) that satisfy customized needs. Its rich I/O connectors (up to 6x COM, 1x LAN, 2x USB) provide versatile I/O expandability.

In addition to its efficient CPU computing performance, the BCO-1000 series can be configured through its two antenna for wireless communication. It adopts a wide range power input from 9V to 30V DC, increasing the reliability of the whole system dramatically. Furthermore, the BCO-1000 series is designed to operate dependably in critical conditions with its anti-vibration, anti-shock and wide operating ranging from -20°C to 50°C temperature range features. The built-in over voltage protection (OVP) makes the BCO-1000 series a safe and secure system for all industrial applications.


The BCO-1000 series is housed in a sturdy and rugged housing that makes it feel exceptionally solid. By complying with military grade endurance (MIL-STD-810G), the BCO-1000 series is designed to withstand significant shock, constant vibration, and sealed to survive the harshest environments or conditions. The neat and compact design facilitates easy integration, effortless expansion and trouble-free maintenance.

The BCO-1000 series is very competitive with its affordable price, but without compromising on performance. It is an optimal solution to fit in various type of interface and variety of applications that requires low cost high performance fanless computing. Aside from its rich I/O capabilities, the robust package of BCO-1000 series makes it an ideal choice for a cost-effective, high performance fanless embedded system.

BCO-1000



BCO-1010



BCO-1010A
BCO-1010B

BCO-1020C



BCO-1030



1.1.1 Key Features

- Intel® Celeron® processor J1900, up to 2.0GHz
- 1x 204-pin DDR3L SODIMM. max up to 8GB
- Dual independent display supported by 1x DVI-I (BCO-1000, BCO-1010, BCO-1010B, and BCO-1020D Only)
- Dual independent display supported by 1x DVI-I and 1x DisplayPort
- 1x Intel® GbE supporting Wake-on-LAN and PXE
- 1x mSATA (BCO-1000 Only)
- 1x 2.5" SATA HDD bay, 1x mSATA
- 2x full-size mini PCIe for communication or expansion modules, 1x SIM socket
- 2x RS-232/422/485, 1x USB 3.0, 1x USB 2.0
- 4x RS-232/422/485, 1x USB 3.0, 1x USB 2.0 (BCO-1010B and BCO-1020C Only)
- 6x RS-232/422/485, 1x USB 3.0, 1x USB 2.0 (BCO-1020D and BCO-1030 Only)
- 4x DI + 4x DO with isolation (BCO-1010A, BCO-1020C, and BCO-1030 Only)
- 9 to 30VDC wide range power input supporting AT/ATX mode
- -20°C to 50°C extended operating temperature

1.2 Hardware Specification

Processor System

- Intel® Celeron® Processor J1900, Quad Core, 2MB Cache, 2.0 GHz with AMI 64Mbit SPI BIOS.

Memory

- 1x 204-Pin DDR3L 1066/1333MHz SODIMM. Max. up to 8 GB

Display

Dual Display

- 1x DVI-D and 1x VGA (w/ Optional Split Cable) (BCO-1000 / BCO-1010 / BCO-1010B / BCO-1020D Only)
- 1x DVI-D and 1x DisplayPort
- 1x DisplayPort and 1x VGA (w/ DVI to VGA Adapter)

Expansion

- 1x Full-size Mini PCIe Socket with USIM Socket (PCIe + USB + SATA)
- 1x Full-size Mini PCIe Socket (PCIe + USB)

Ethernet

- 1x Intel® I210-AT GbE LAN Port, Support Wake-on-LAN and PXE

Audio

- Realtek ALC888S Audio Codec
- 1x Mic-in and 1x Line-out

Watchdog Timer

- Software Programmable Supports 1~255 sec. System Reset

Storage

- 1x 2.5" SATA HDD Bay (Except BCO-1000)
- 1x mSATA (share by 1x Mini-PCIe Socket)
- 1x External SIM Card Socket

I/O Ports

- 1x USB 3.0 Port
- 1x USB 2.0 Port
- 2 x DB9 for COM1~2, Support RS232/422/485 with Auto Flow Control (BCO-1000 / BCO-1010 / BCO-1010A only)
- 4 x DB9 for COM1~4, Support RS232/422/485 with Auto Flow Control (BCO-1010B / BCO-1020C only)
- 6 x DB9 for COM1~6, Support RS232/422/485 with Auto Flow Control (BCO-1020D / BCO-1030 only)
- 1x Power Switch
- 1x Reset Hole
- 1x AT/ATX Switch

Digital Input & Output

(Except BCO-1000 and BCO-1010)

- 4x Digital Input (Source Type)
 - Input Voltage (Dry Contact):
 - Logic 0: Close to GND
 - Logic 1: Open
 - Input Voltage:
 - Logic 0: 3V max.
 - Logic 1: 5V min. (DI to COM-)
- 4x Digital Output
 - Supply Voltage: 5~30VDC
 - Sink Current: 200 mA Max. Per Channel

Power

- Support AT, ATX Mode
- 1x 3-pin Terminal Block Connector with Power Input 9~30VDC
- 1x Optional AC/DC 12V/5A, 60W Power Adapter

Environment

- Operating Temperature: Ambient with Air Flow: -20°C to 50°C (with Industrial Grade Peripherals)
- Storage Temperature: -30°C to 70°C
- Relative humidity: 10%~95% (non-condensing)

Physical

- Dimension (WxDxH, mm):
 - 142 x 101 x 30 mm (BCO-1000 Only)
 - 142 x 101 x 41.5 mm (BCO-1010, BCO-1010A, and BCO-1010B Only)
 - 142 x 101 x 58 mm (BCO-1020C and BCO-1020D Only)
 - 142 x 101 x 75 mm (BCO-1030)
- Weight: TBC
- Construction: Fanless Design
- Mounting: Wall Mounting

Operating System

- Windows® 10
- WES8.1
- Windows® 7
- WES7

Certifications

- CE
- FCC Class A

1.3 System I/O

1.3.1 BCO-1000

Front Panel

ATX power on/off switch

Press to power-on or power-off the system

AT/ATX mode select switch

Used to select AT or ATX power mode

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Watchdog LED

Indicates the watchdog status of the system

USB 3.0 port

Used to connect USB 3.0/2.0/1.1 device

USB 2.0 port

Used to connect USB 2.0/1.1 device

SIM card

Used to insert a SIM card

LAN port

Used to connect the system to a local area network

Line-out

Used to connect a speaker

Mic-in


Used to connect a microphone

Reset hole

Used to reset the system

Antenna hole

Used to connect an antenna for optional Mini-Pcie WiFi module

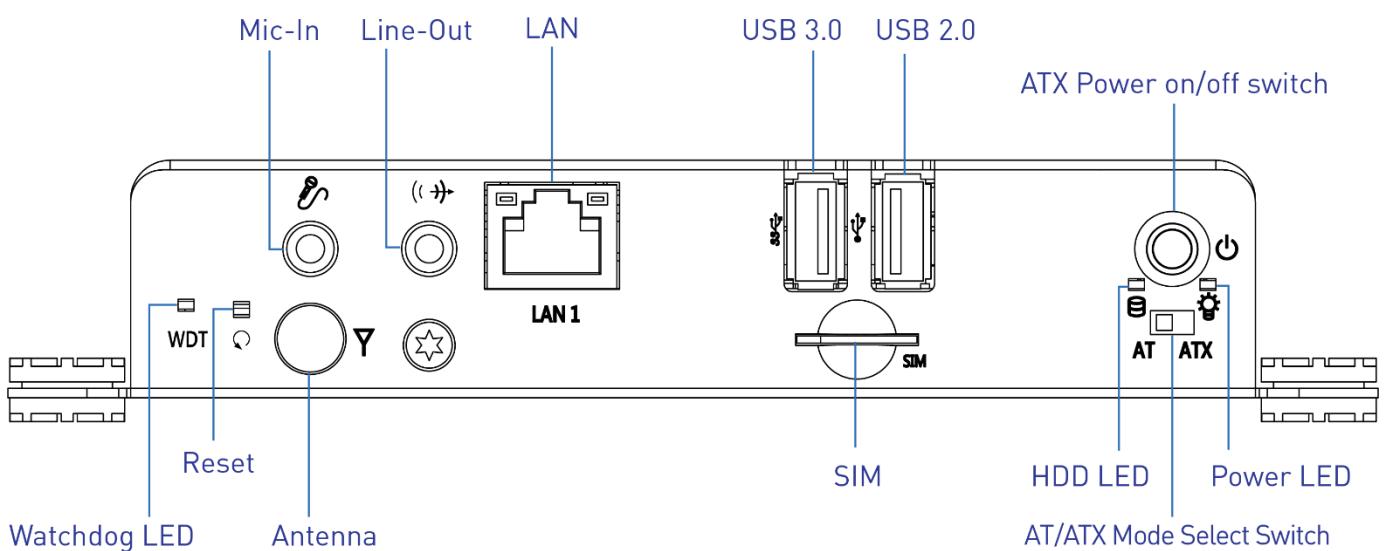

Rear Panel

DC IN

Used to plug a DC power input with terminal block

DVI-I port


Used to connect a DVI monitor or connect optional split cable for dual display mode

COM port

COM1 ~ COM2 support RS232/422/485 serial device

Antenna hole

Used to connect an antenna for optional Mini PCIe WiFi module

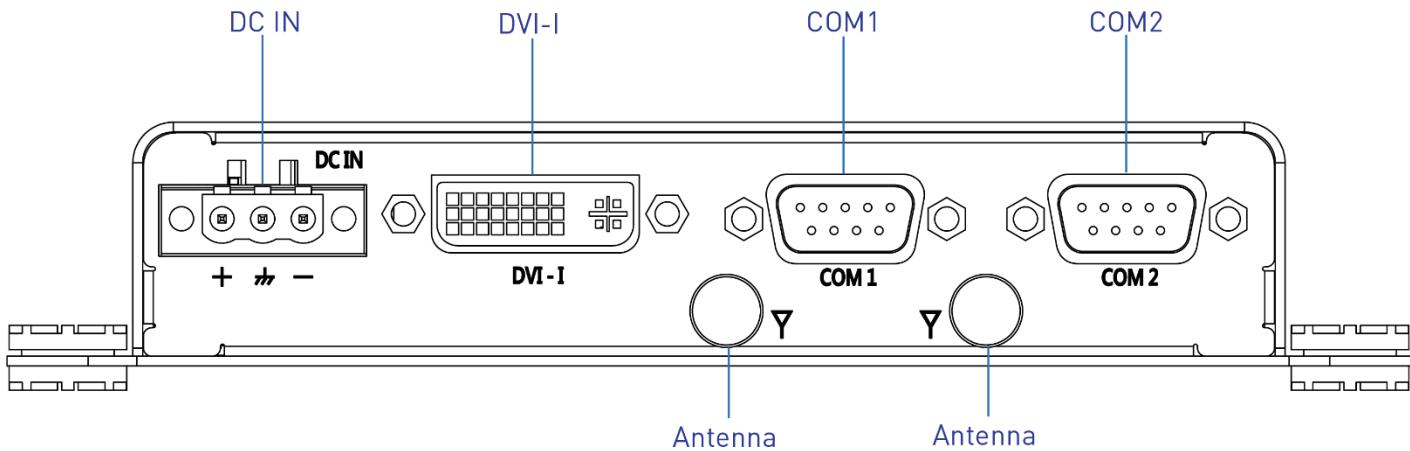

1.3.2 BCO-1010 / BCO-1010A / BCO-1010B

Front Panel

ATX power on/off switch

Press to power-on or power-off the system

AT/ATX mode select switch

Used to select AT or ATX power mode

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Watchdog LED

Indicates the watchdog status of the system

USB 3.0 port

Used to connect USB 3.0/2.0/1.1 device

USB 2.0 port

Used to connect USB 2.0/1.1 device

SIM card

Used to insert a SIM card

LAN port

Used to connect the system to a local area network

Line-out

Used to connect a speaker

Mic-in


Used to connect a microphone

Reset hole

Used to reset the system

Antenna hole

Used to connect an antenna for optional Mini-Pcie WiFi module

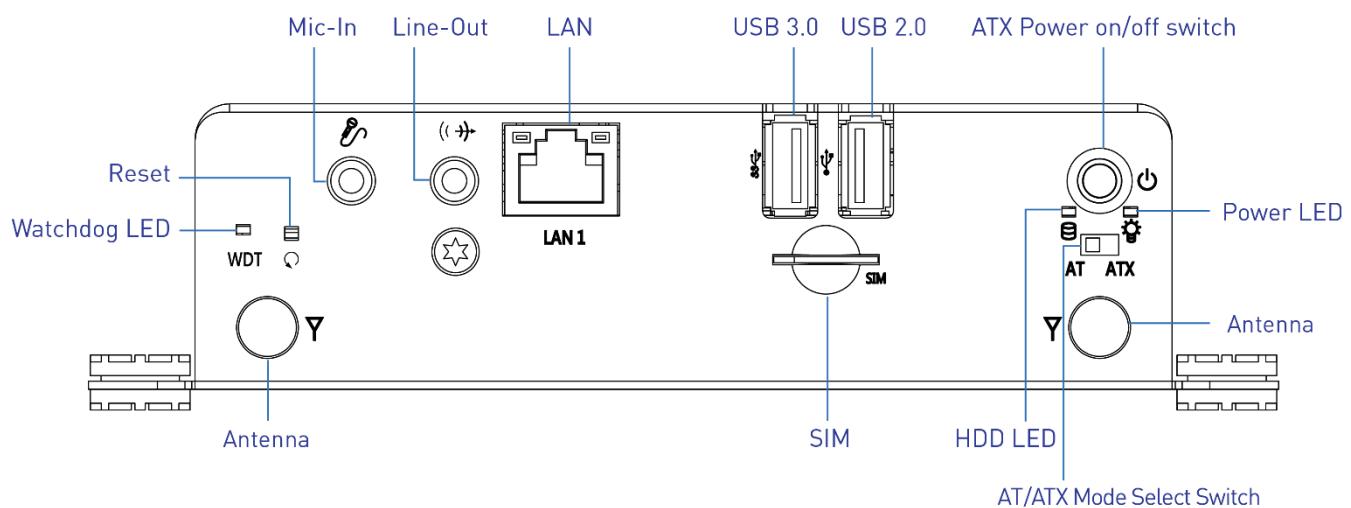

Rear Panel

DC IN

Used to plug a DC power input with terminal block

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

DisplayPort port

Used to connect a DisplayPort monitor (BCO-1010A Only)

Digital I/O Terminal Block

The Digital I/O terminal block supports 4 digital input and 4 digital output (BCO-1010A Only)

COM port

COM1 ~ COM2 support RS232/422/485 serial device




COM1 ~ COM4 support RS232/422/485 serial device (BCO-1010B Only)

Antenna hole

Used to connect an antenna for optional Mini-Pcie WiFi module

Expandable I/O bracket

Used to customized I/O output (BCO-1010 Only)

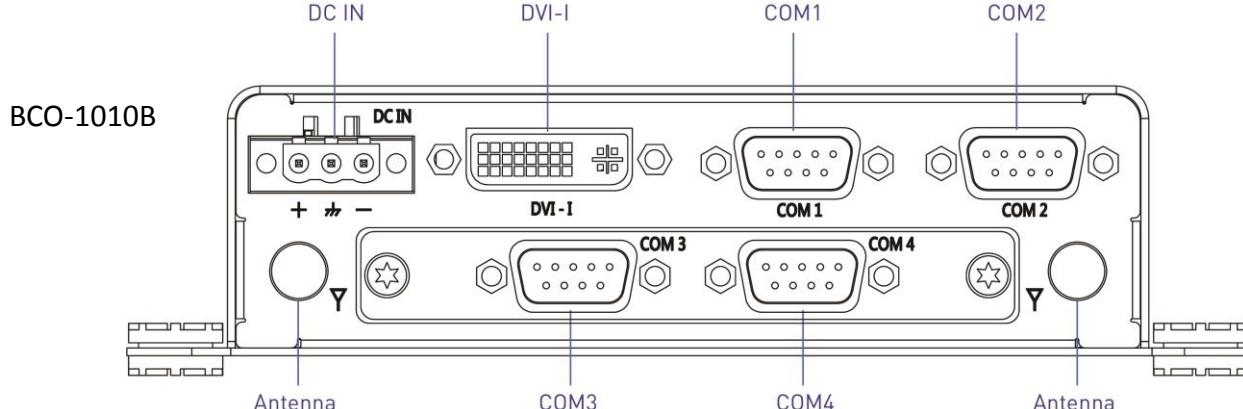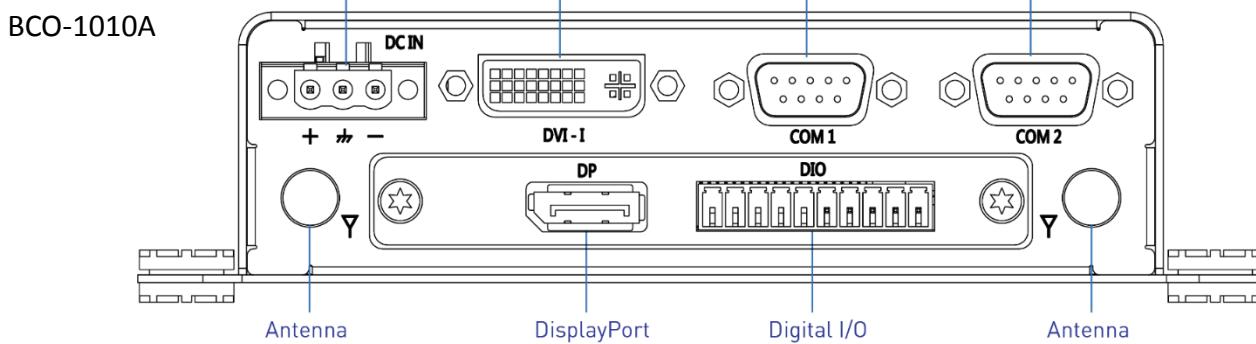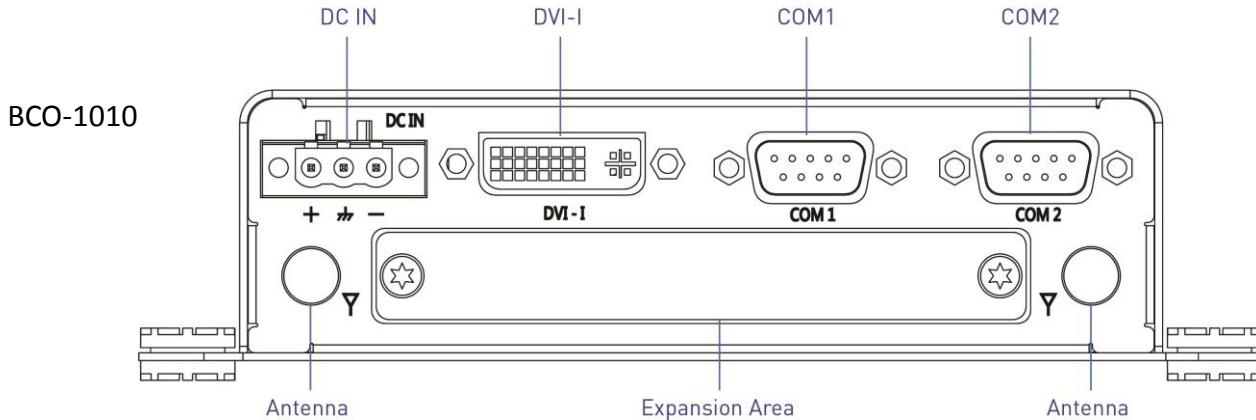

1.3.2 BCO-1020C / BCO-1020D

Front Panel

ATX power on/off switch

Press to power-on or power-off the system

AT/ATX mode select switch

Used to select AT or ATX power mode

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Watchdog LED

Indicates the watchdog status of the system

USB 3.0 port

Used to connect USB 3.0/2.0/1.1 device

USB 2.0 port

Used to connect USB 2.0/1.1 device

SIM card

Used to insert a SIM card

LAN port

Used to connect the system to a local area network

Line-out

Used to connect a speaker

Mic-in


Used to connect a microphone

Reset hole

Used to reset the system

Antenna hole

Used to connect an antenna for optional Mini-Pcie WiFi module

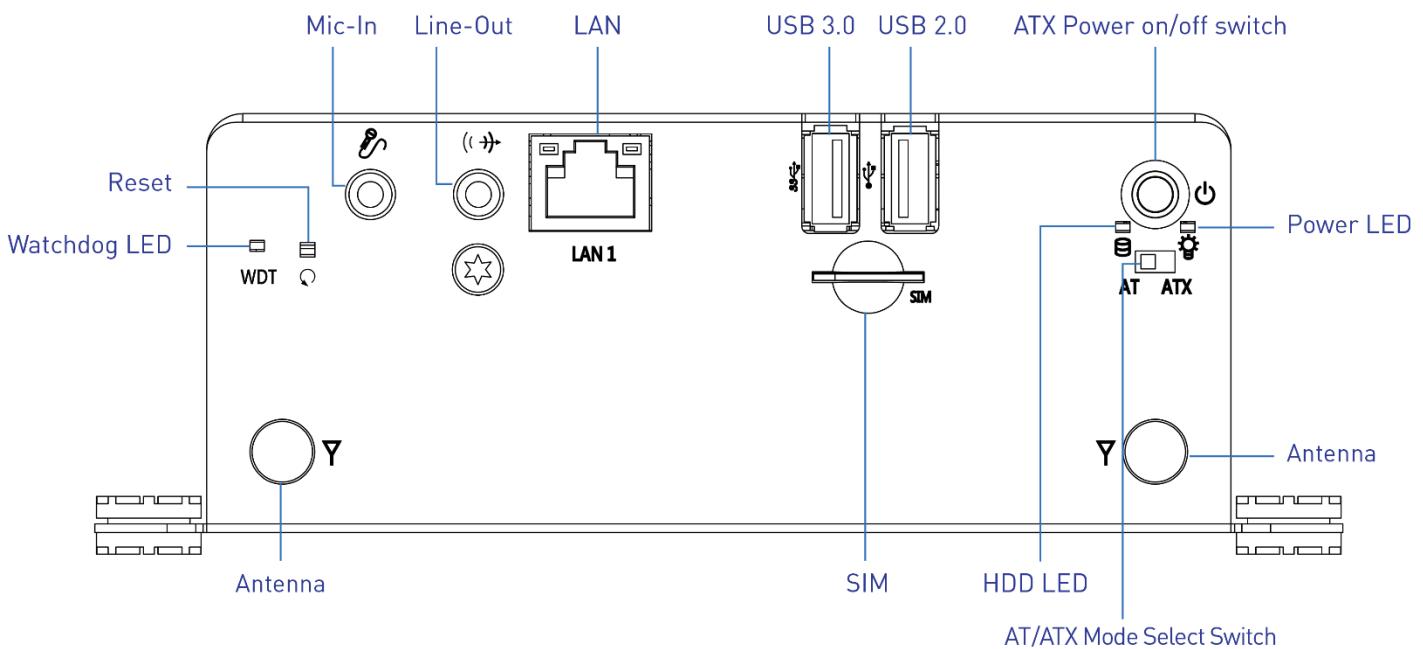

Rear Panel

DC IN

Used to plug a DC power input with terminal block

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

DisplayPort port

Used to connect a DisplayPort monitor

Digital I/O Terminal Block

The Digital I/O terminal block supports 4 digital input and 4 digital output



COM port

COM1 ~ COM4 support RS232/422/485 serial device

COM1 ~ COM6 support RS232/422/485 serial device (BCO-1020D Only)

Antenna hole

Used to connect an antenna for optional Mini-Pcie WiFi module

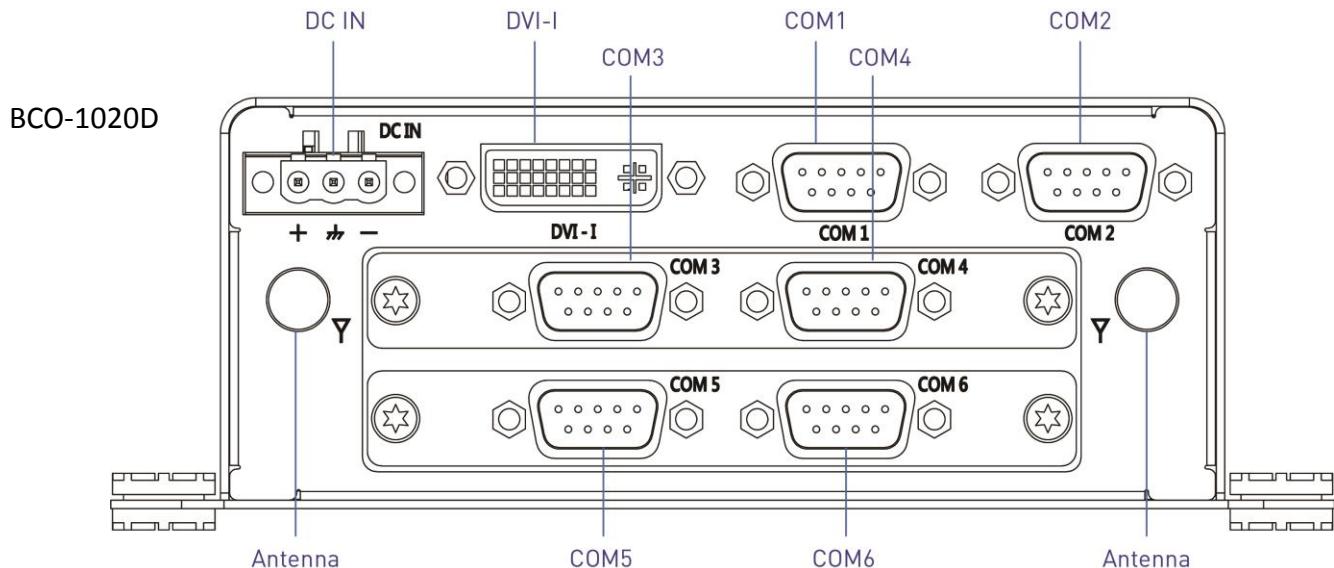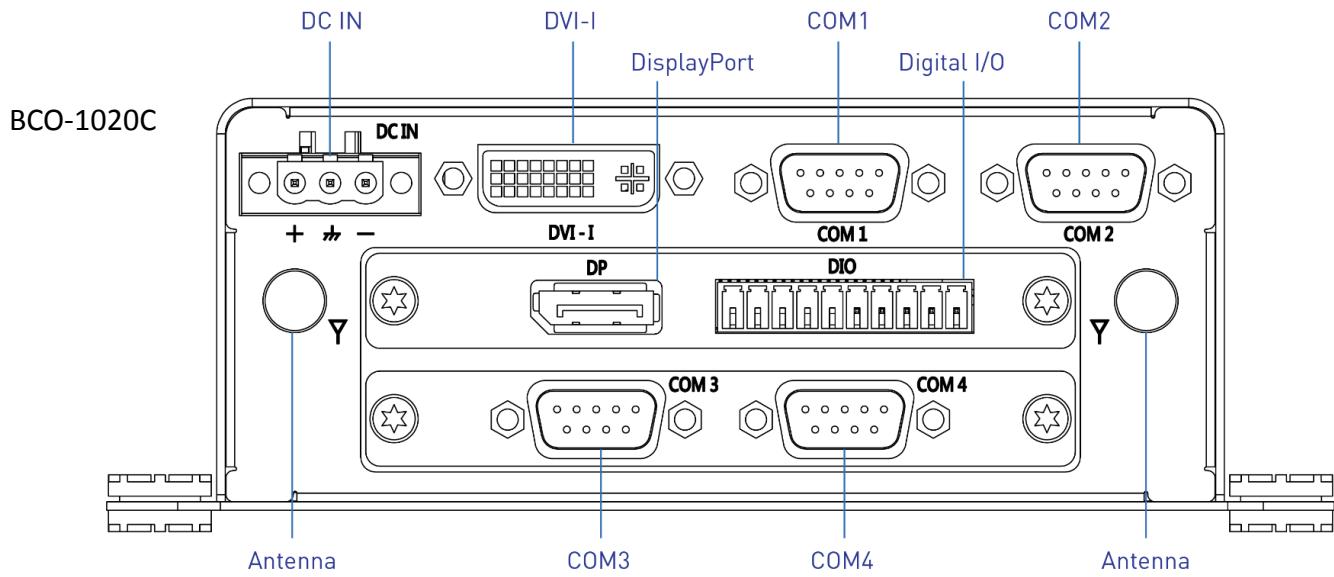

1.3.2 BCO-1030

Front Panel

ATX power on/off switch

Press to power-on or power-off the system

AT/ATX mode select switch

Used to select AT or ATX power mode

Power LED

Indicates the power status of the system

HDD LED

Indicates the status of the hard drive

Watchdog LED

Indicates the watchdog status of the system

USB 3.0 port

Used to connect USB 3.0/2.0/1.1 device

USB 2.0 port

Used to connect USB 2.0/1.1 device

SIM card

Used to insert a SIM card

LAN port

Used to connect the system to a local area network

Line-out

Used to connect a speaker

Mic-in

Used to connect a microphone

Reset hole


Used to reset the system

Antenna hole

Used to connect an antenna for optional Mini-Pcie WiFi module

Expandable I/O bracket

Used to customized I/O output

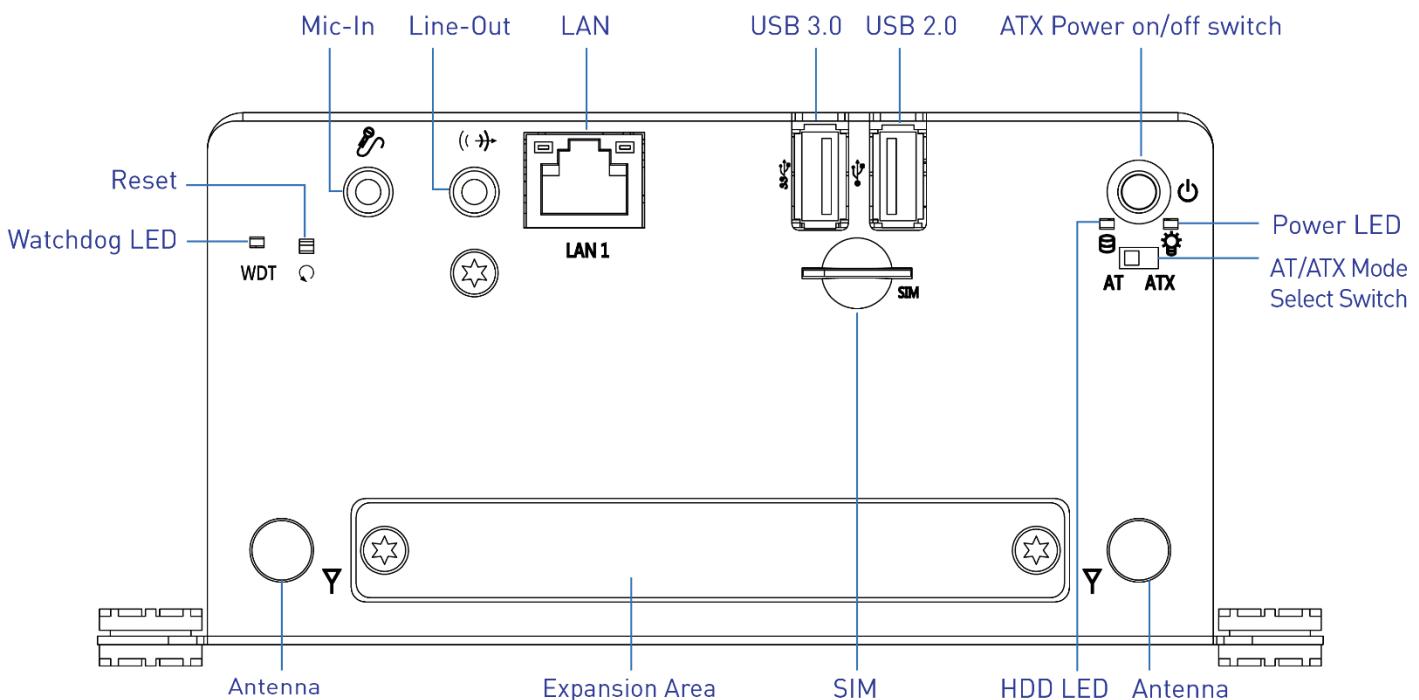

Rear Panel

DC IN

Used to plug a DC power input with terminal block

DVI-I port

Used to connect a DVI monitor or connect optional split cable for dual display mode

DisplayPort port

Used to connect a DisplayPort monitor

Digital I/O Terminal Block


The Digital I/O terminal block supports 4 digital input and 4 digital output

COM port

COM1 ~ COM6 support RS232/422/485 serial device


Antenna hole

Used to connect an antenna for optional Mini-PCIe WiFi module

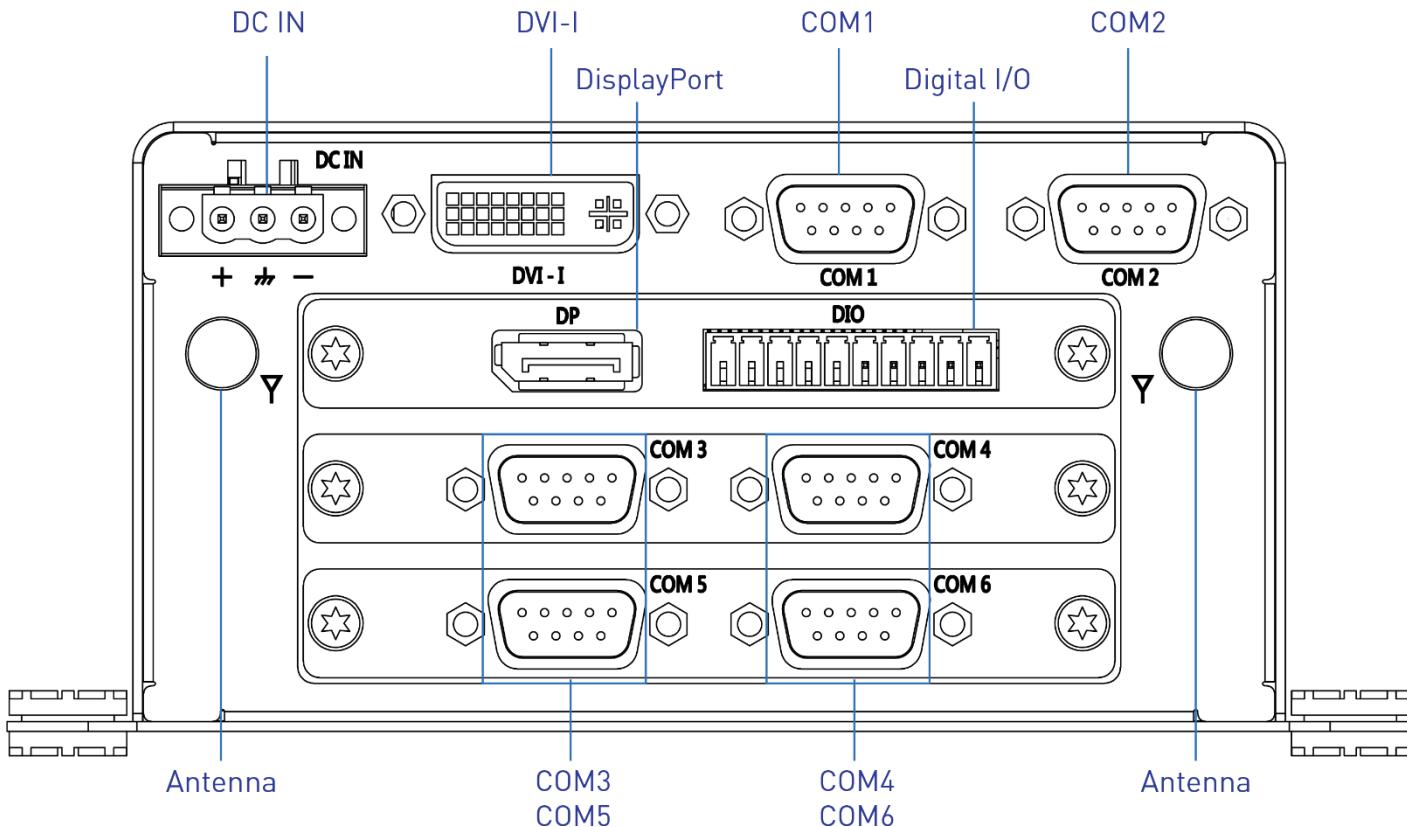


1.4 Mechanical Dimensions


1.4.1 BCO-1000

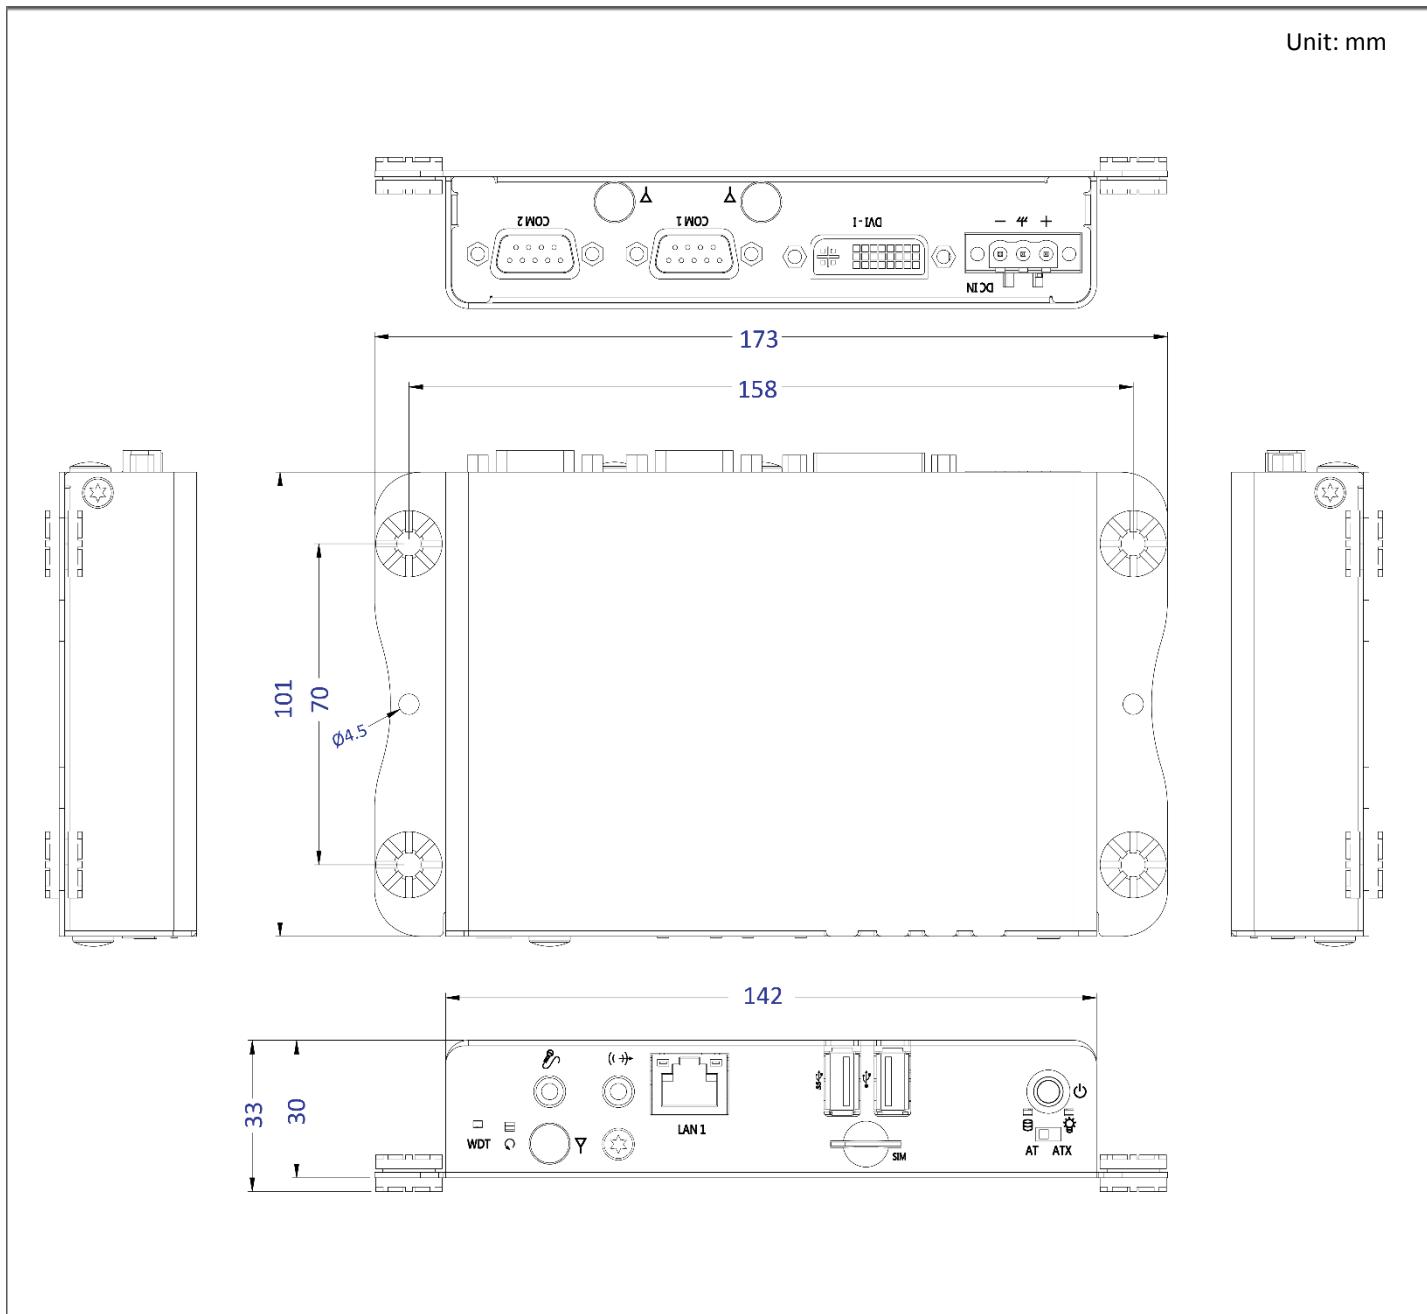


1.4.2 BCO-1010 / BCO-1010A / BCO-1020B

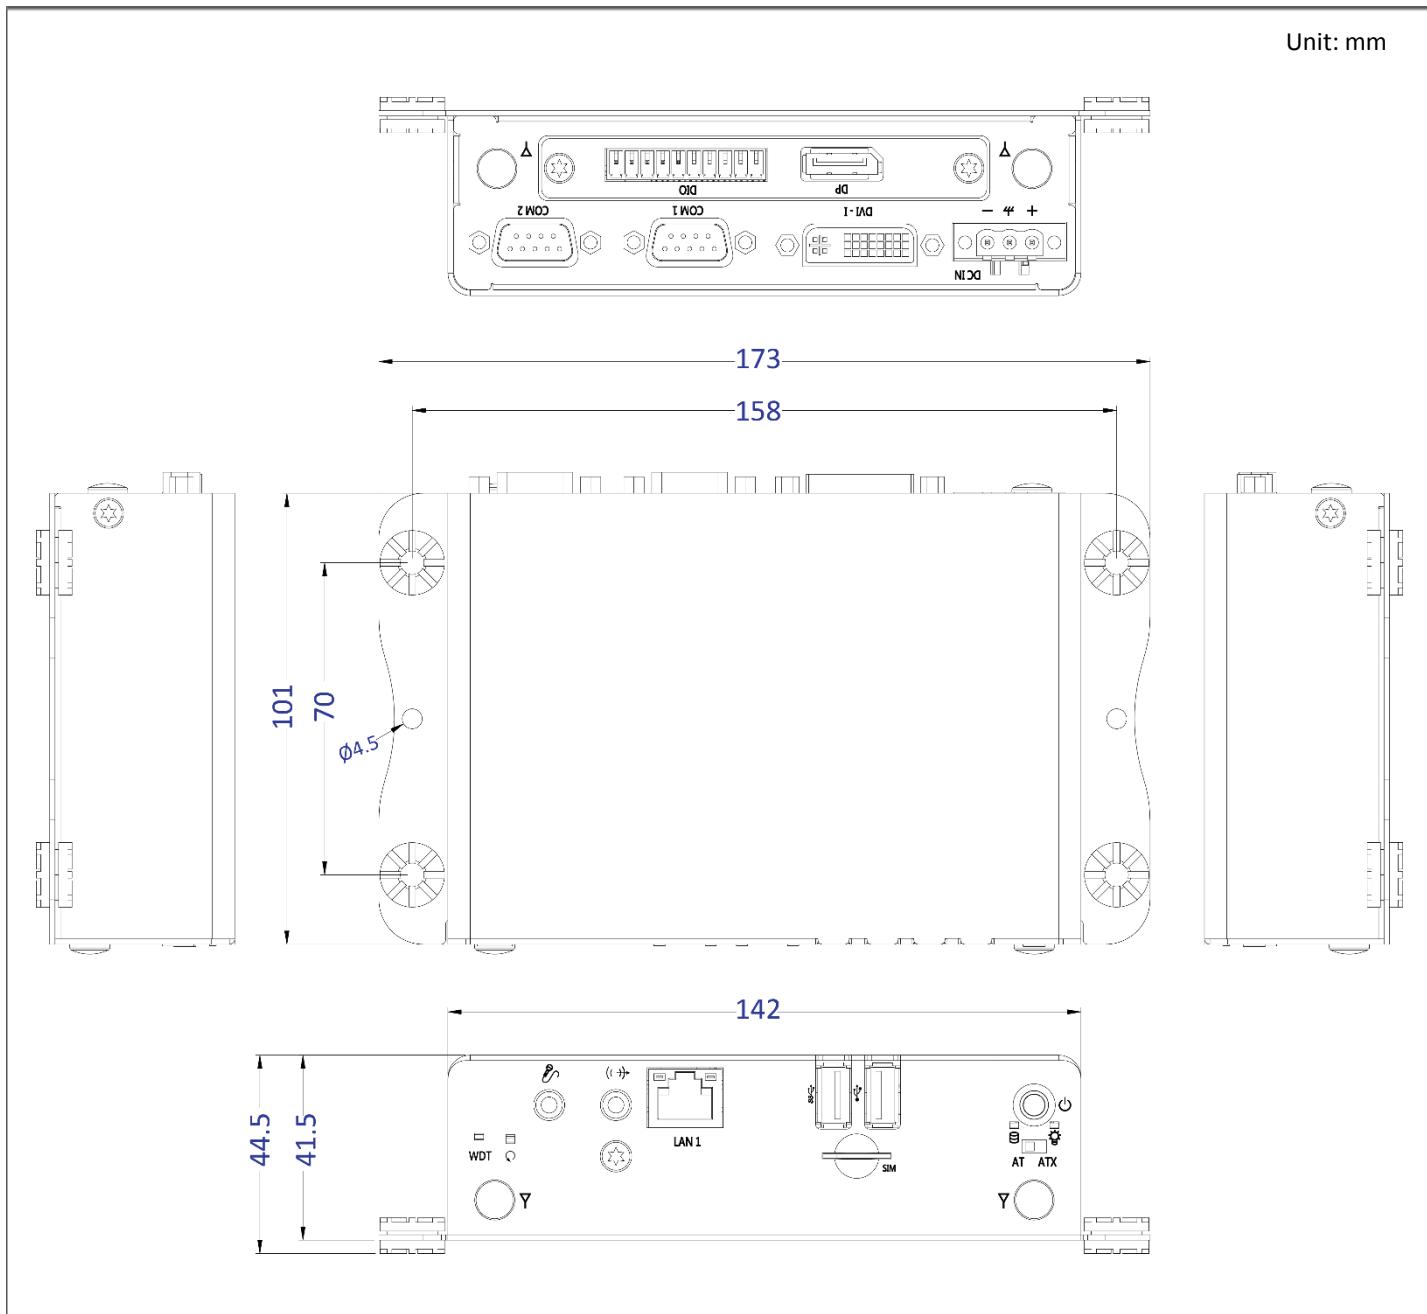

1.4.3 BCO-1020C / BCO-1020D

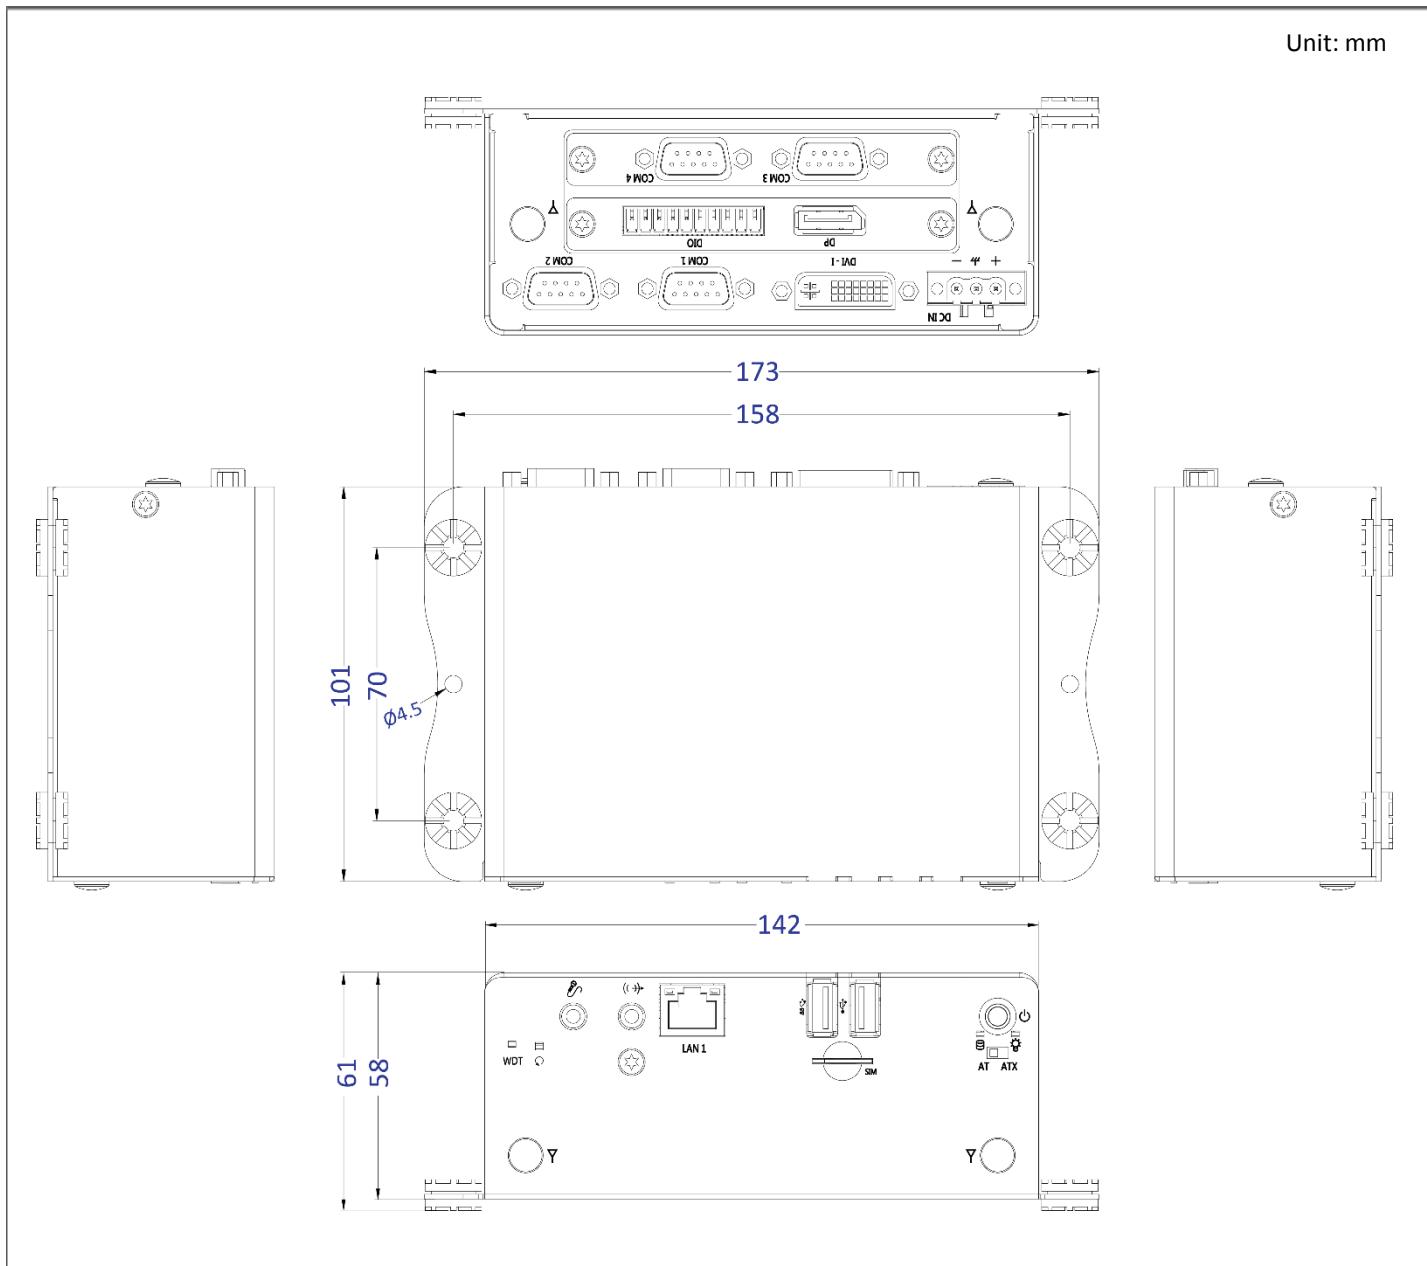

1.4.4 BCO-1030

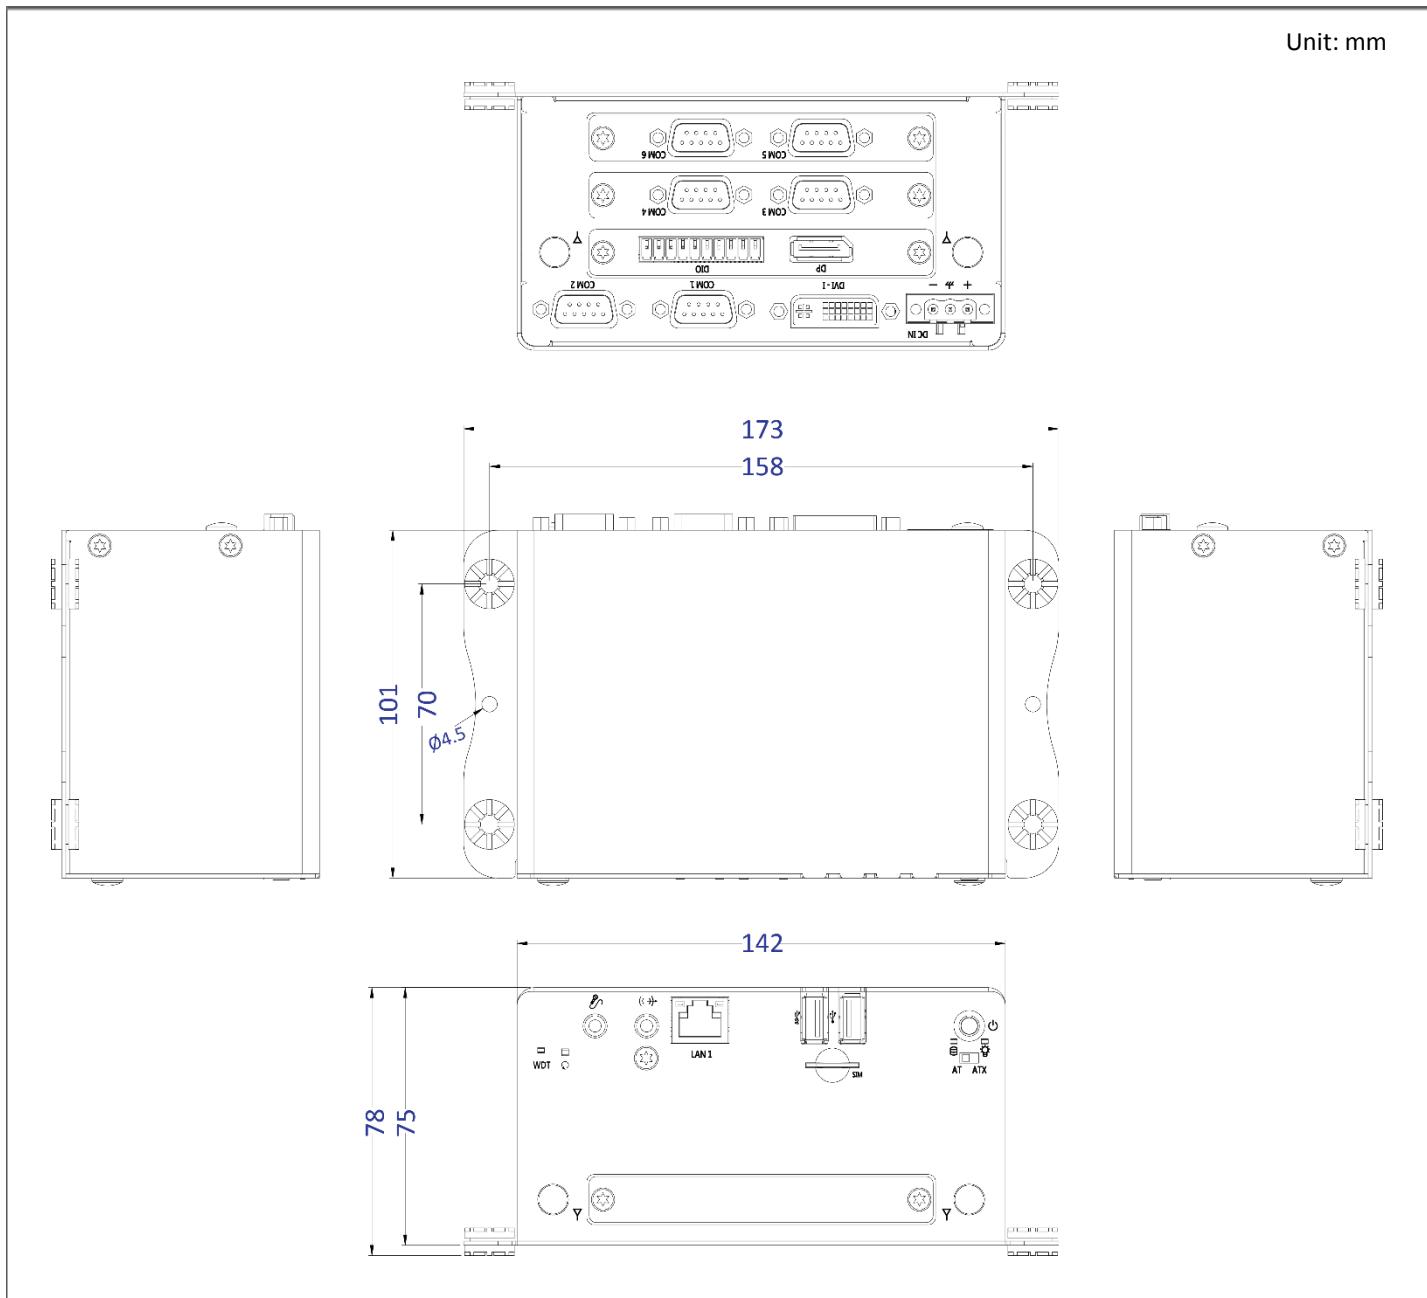


Chapter 2


Switches and Connectors

2.1 Switch and Connector Locations



2.1.1 Top View

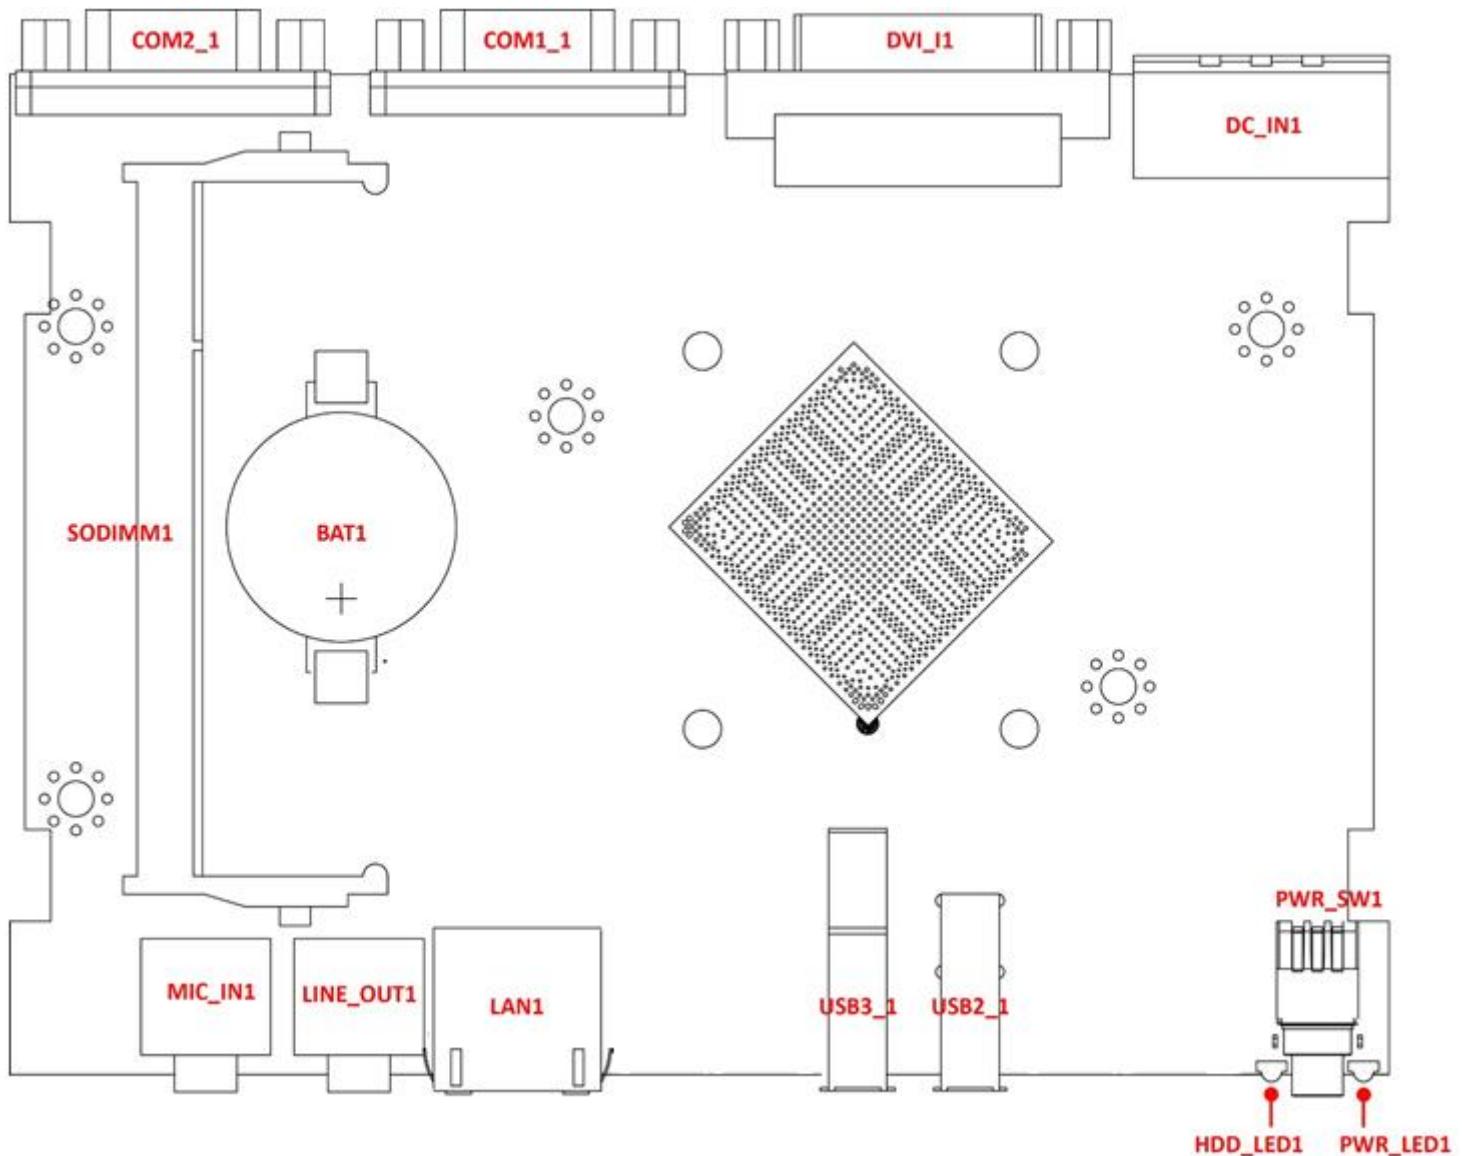

2.1.2 Bottom View

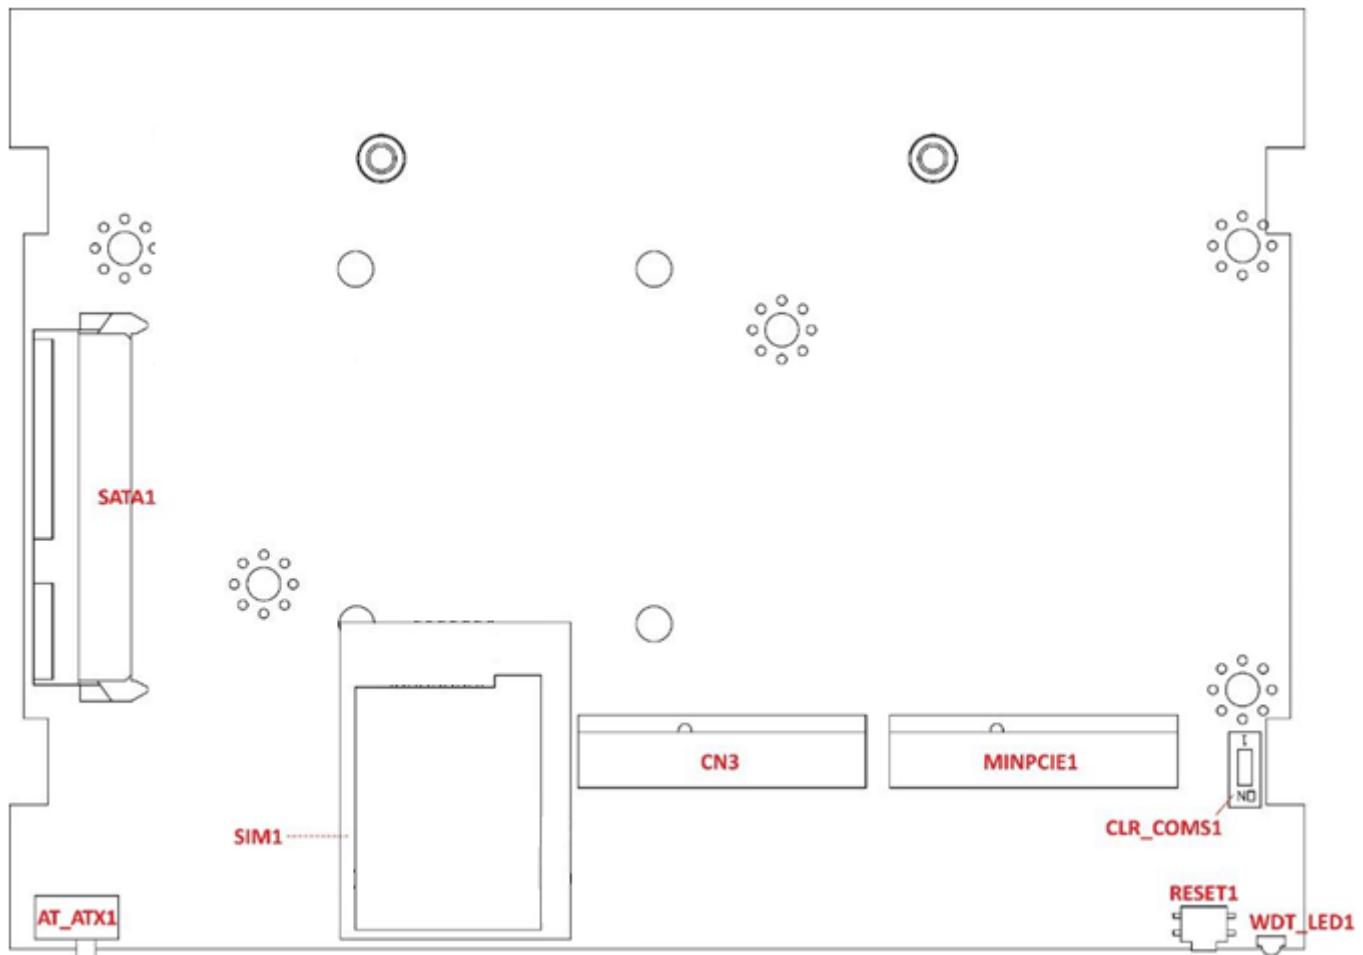

2.1.3 Daughter board view

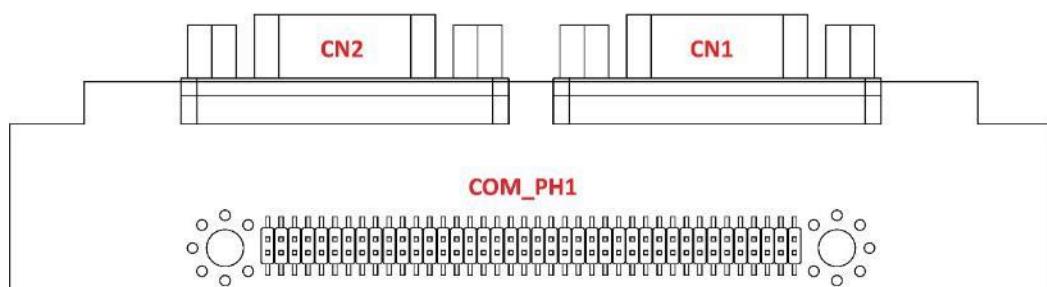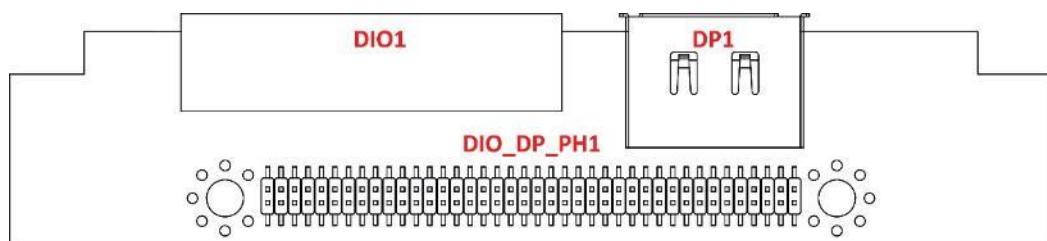

2.2 Connector / Switch Definition


List of Connector / Switch

Connector Location	Definition
AT_ATX1	AT / ATX Power Mode Switch
CLR_CMOS1	Clear BIOS Switch
PWR_SW1	Power Switch
PWR_LED1	Power LED Status
HDD_LED1	HDD Access LED Status
WDT_LED1	Watchdog LED Status
USB2_1	USB 2.0 Port
USB3_1	USB 3.0 Port
LAN1	LAN Port
SIM1	SIM Card Socket
LINE_OUT1	Line-out Jack
MIC_IN1	Mic-in Jack
RESET1	Reset Switch
DC_IN1	3-pin DC 9~48V Power Input Connector
DVI_I1	DVI-I Connector
COM1_1, COM2_1, CN1, CN2	RS232 / RS422 / RS485 Connector
DP1	DisplayPort Connector
DIO1	4DI / 4DO Connector
MINIPCIE1	Mini PCI-Express Socket
CN3	Mini PCI-Express / mSATA Socket
SATA1	SATA with Power Connector

2.3 Switches Definitions


AT_ATX1: AT / ATX Power Mode Switch

Switch	Definition
1-2 (Right)	ATX Power Mode (Default)
2-3 (Left)	AT Power Mode



CLR_CMOS1: Clear BIOS Switch


Switch	Definition
Off	Normal Status (Default)
ON	Clear BIOS



2.4 Connectors Definitions

PWR_SW1: Power Button

Pin	Definition	Pin	Definition
1	NC	4	GND
2	Power Button	5	NC
3	NC	6	GND



PWR_LED1: Power LED Status

Pin	Definition
1	POWER LED+
2	POWER LED-



HDD_LED1: HDD Access LED Status

Pin	Definition
1	HDD LED+
2	HDD LED-




WDT_LED1: Watchdog LED Status

Pin	Definition
1	HDD LED+
2	HDD LED-




USB2_1: USB2.0 Connector, Type A

Pin	USB2_1 Definition
1	+5V
2	USB2_D2-
3	USB2_D2+
4	GND




USB3_1: USB 3.0 Connector, Type A

Pin	Definition	Pin	Definition
1	+5V	6	USB3_RX+
2	USB2_DATA1-	7	GND
3	USB2_DATA1+	8	USB3_TX-
4	GND	9	USB3_TX+
5	USB3_RX-		

**LAN1: RJ45 with LEDs Port**


Pin	Definition	Pin	Definition
1	LAN1_MDIOP	5	LAN1_MDI2N
2	LAN1_MDION	6	LAN1_MDI1N
3	LAN1_MDI1P	7	LAN1_MDI3P
4	LAN1_MDI2P	8	LAN1_MDI3N

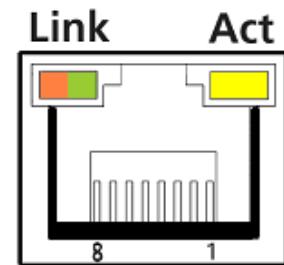

Link LED Status	Definition	Act LED Status	Definition
Steady Orange	1Gbps Network Link	Blinking Yellow	Data Activity
Steady Green	100Mbps Network Link	Off	No Activity
Off	10Mbps Network Link		

SIM1: SIM Card Socket

Pin	Definition	Pin	Definition
C1	UIM_PWR	C6	UIM_VPP
C2	UIM_RESET	C7	UIM_DATA
C3	UIM_CLK	CD	NC
C5	GND	COM	GND

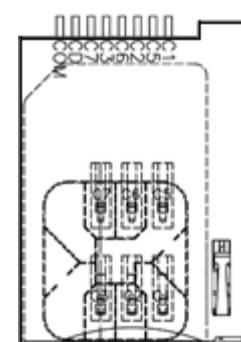

LINE_OUT1 : Line-out Jack (Green)

Connector Type: 5-pin Phone Jack

Pin	Definition
1	GND
2	OUT_R
3	NC
4	GND
5	OUT_L

**MIC_IN1: Microphone Jack (Pink)**

Connector Type: 5-pin Phone Jack

Pin	Definition
1	GND
2	MIC_R
3	NC
4	GND
5	MIC_L


**RESET1 : Reset Button**

Pin	Definition
1	RESET
2	GND

**DC_IN1: DC Power Input Connector (+9~30V)**


Connector Type: Terminal Block 1X3 3-pin, 5.0mm pitch

Pin	Definition
1	+9~30VIN
3	GND

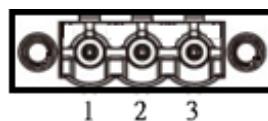


DVI_I1: DVI-I Connector

Pin	Definition	Pin	Definition
1	DVI_TX2-	16	DVI Hot Plug Detect
2	DVI_TX2+	17	DVI_TX0-
3	GND	18	DVI_TX0+
4	NC	19	GND
5	NC	20	NC
6	DDC_CLOCK	21	NC
7	DDC_DATA	22	GND
8	VGA_VSYNC	23	DVI_TXCLK+
9	DVI_TX1-	24	DVI_TXCLK-
10	DVI_TX1+	C1	VGA_RED
11	GND	C2	VGA_GREEN
12	NC	C3	VGA_BLUE
13	NC	C4	VGA_HSYNC
14	+5V	C5	GND
15	GND		

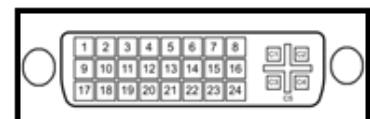**COM1_1: RS232 / RS422 / RS485 Connector**

Connector Type: 9-pin D-Sub


Pin	RS232 Definition	RS422 / 485 Full Duplex Definition	RS485 Half Duplex Definition
1	DCD1	TX1-	DATA1-
2	RxD1	TX1+	DATA1+
3	TxD1	RX1+	
4	DTR1	RX1-	
5	GND		
6	DSR1		
7	RTS1		
8	CTS1		
9	RI1		

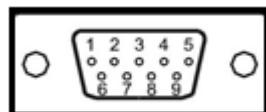

COM2_1: RS232 / RS422 / RS485 Connector


Connector Type: 9-pin D-Sub

Pin	RS232 Definition	RS422 / 485 Full Duplex Definition	RS485 Half Duplex Definition
1	DCD2	TX2-	DATA2-
2	RxD2	TX2+	DATA2+
3	TxD2	RX2+	
4	DTR2	RX2-	
5	GND		
6	DSR2		
7	RTS2		
8	CTS2		
9	RI2		

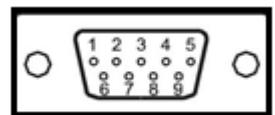**CN1: RS232 / RS422 / RS485 Connector**

Connector Type: 9-pin D-Sub


Pin	RS232 Definition	RS422 / 485 Full Duplex Definition	RS485 Half Duplex Definition
1	DCD3 (DCD5)	TX3- (TX5-)	DATA3- (DATA5-)
2	RxD3 (Rx5)	TX3+ (TX5+)	DATA3+ (DATA5+)
3	TxD3 (Tx5)	RX3+ (RX5+)	
4	DTR3 (DTR5)	RX3- (RX5-)	
5	GND		
6	DSR3 (DSR5)		
7	RTS3 (RTS5)		
8	CTS3 (CTS5)		
9	RI3 (RI5)		

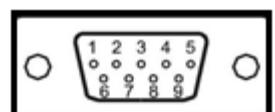


CN2: RS232 / RS422 / RS485 Connector

Connector Type: 9-pin D-Sub

Pin	RS232 Definition	RS422 / 485 Full Duplex Definition	RS485 Half Duplex Definition
1	DCD4 (DCD6)	TX4- (TX6-)	DATA4- (DATA6-)
2	RxD4 (RxD6)	TX4+ (TX6+)	DATA4+ (DATA6+)
3	TxD4 (TxD6)	RX4+ (RX6+)	
4	DTR4 (DTR6)	RX4- (RX6-)	
5	GND		
6	DSR4 (DSR6)		
7	RTS4 (RTS6)		
8	CTS4 (CTS6)		
9	RI4 (RI6)		

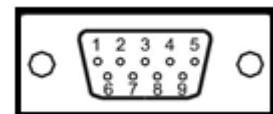
**DP1: DisplayPort Connector**

Pin	Definition	Pin	Definition
1	DP_LANE0_P	11	GND
2	GND	12	DP_LANE3_N
3	DP_LANE0_N	13	GND
4	DP_LANE1_P	14	GND
5	GND	15	DP_AUX_P
6	DP_LANE1_N	16	GND
7	DP_LANE2_P	17	DP_AUX_N
8	GND	18	DP_HPD
9	DP_LANE2_N	19	GND
10	DP_LANE3_P	20	DP_PWR


**DIO1: Digital Input / Output Connector**

Connector Type: Terminal Block 1X10 10-pin, 3.5mm pitch


Pin	Definition	Pin	Definition
1	DC INPUT	6	DO1
2	DI1	7	DO2
3	DI2	8	DO3
4	DI3	9	DO4
5	DI4	10	GND

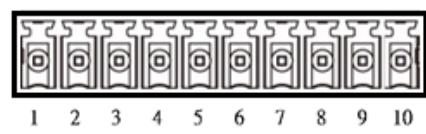


Reference Input Circuit

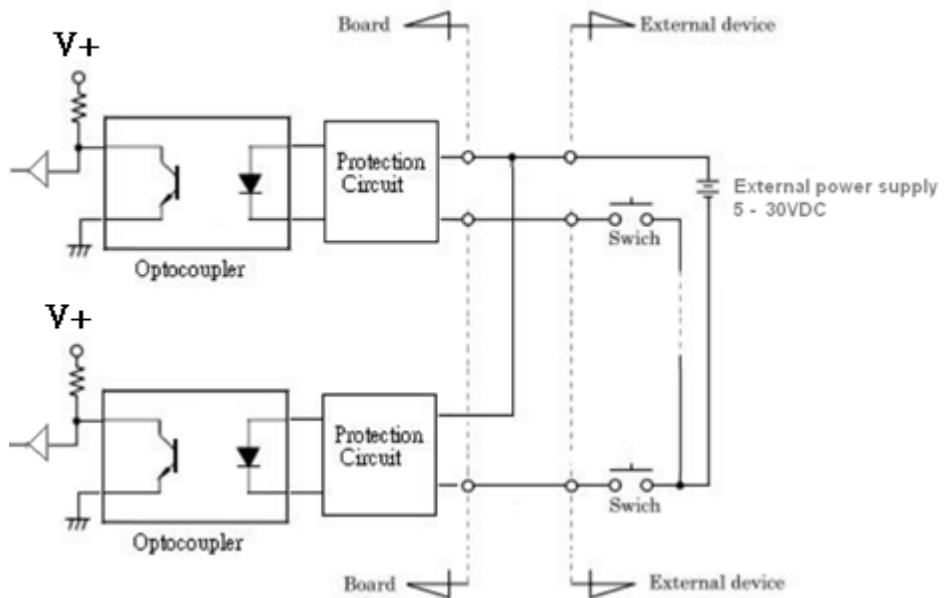


Digital Input Wiring

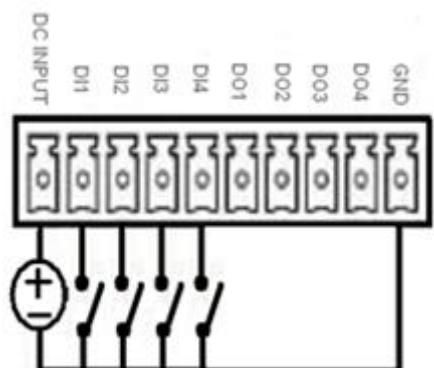

External Output Circuit

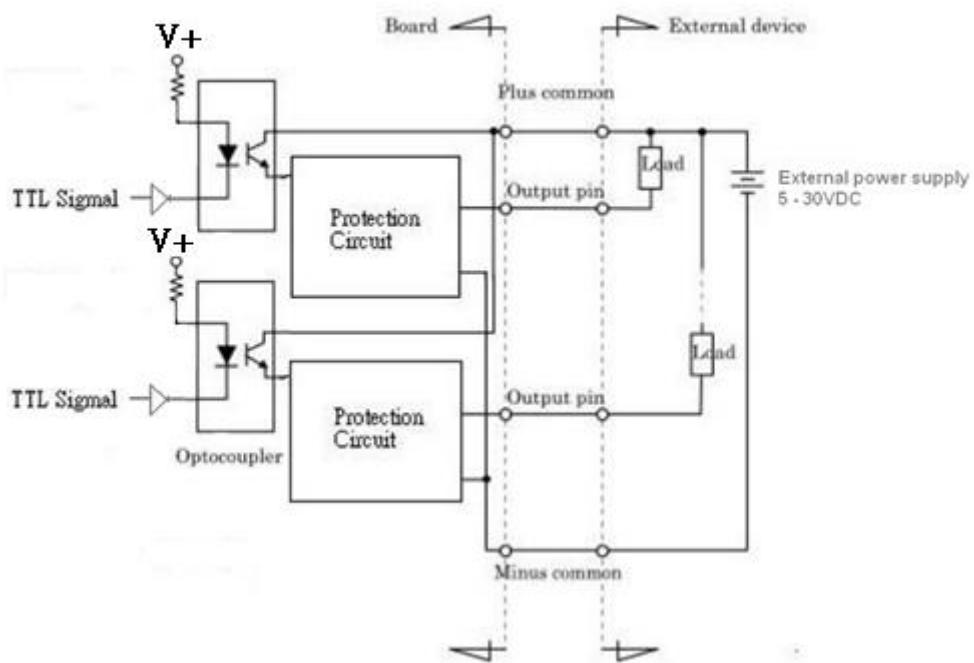


Digital Output Wiring

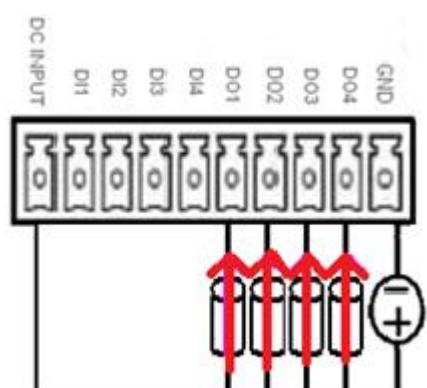


MINIPCIE1: Mini PCI-Express Socket

Pin	Definition	Pin	Definition	Pin	Definition
1	WAKE#	19	NC	37	GND
2	+3.3V	20	+3.3V	38	USB_DP1
3	NC	21	GND	39	+3.3V
4	GND	22	MINIPCIE_RST#	40	GND
5	NC	23	MINIPCIE_RXN1	41	+3.3V
6	+1.5V	24	+3.3V	42	NC
7	CLKREQ1#	25	MINIPCIE_RXP1	43	GND
8	NC	26	GND	44	NC
9	GND	27	GND	45	NC
10	NC	28	+1.5V	46	NC
11	MINIPCIE_CLKN1	29	GND	47	NC
12	NC	30	SMB_CLK	48	+1.5V
13	MINIPCIE_CLKP1	31	MINIPCIE_TXN1	49	NC
14	NC	32	SMB_DATA	50	GND
15	GND	33	MINIPCIE_TXP1	51	NC
16	NC	34	GND	52	+3.3V
17	NC	35	GND		
18	GND	36	USB_DN1		

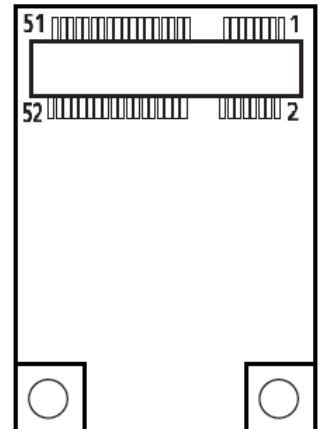
**CN3: Mini PCI-Express / mSATA Socket**

Pin	Definition	Pin	Definition	Pin	Definition
1	WAKE#	19	NC	37	GND
2	+3.3V	20	+3.3V	38	USB_DP2
3	NC	21	GND	39	+3.3V
4	GND	22	MINIPCIE_RST#	40	GND
5	NC	23	MINIPCIE_RXN2 (SATA_RXP0)	41	+3.3V
6	+1.5V	24	+3.3V	42	NC
7	CLKREQ2#	25	MINIPCIE_RXP2 (SATA_RXN0)	43	GND
8	USIM_VCC	26	GND	44	NC
9	GND	27	GND	45	NC
10	USIM_DATA	28	+1.5V	46	NC
11	MINIPCIE_CLKN2	29	GND	47	NC
12	USIM_CLK	30	SMB_CLK	48	+1.5V
13	MINIPCIE_CLKP2	31	MINIPCIE_TXN2 (SATA_TXN0)	49	NC
14	USIM_RST	32	SMB_DATA	50	GND
15	GND	33	MINIPCIE_TXP2 (SATA_TXP0)	51	NC
16	USIM_VPP	34	GND	52	+3.3V
17	NC	35	GND		
18	GND	36	USB_DN1		

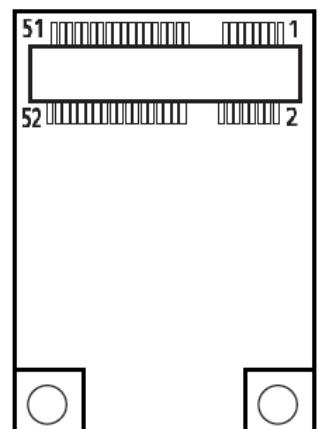

SATA1: SATA with Power Connector

Pin	Definition	Pin	Definition
1	GND	12	GND
2	SATA_TXP1	13	GND
3	SATA_TXN1	14	+5V
4	GND	15	+5V
5	SATA_RXN1	16	+5V
6	SATA_RXP1	17	GND
7	GND	18	GND
8	+3.3V	19	GND
9	+3.3V	20	+12V
10	+3.3V	21	+12V
11	GND	22	+12V

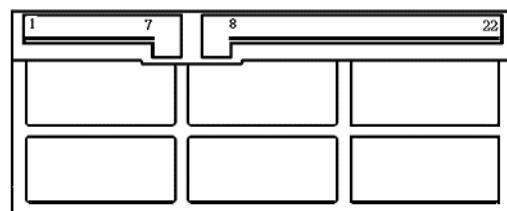

Chapter 3

System Setup

3.1 Set torque force to 3.5 kgf-cm to execute all the screwing and unscrewing.

**WARNING**

In order to prevent electric shock or system damage, before removing the chassis cover, must turn off power and disconnect the unit from power source.

3.2 Removing chassis bottom cover

1. Turn the system upside down. Unscrew the 4 screws on the bottom cover.



2. Now you can remove the bottom cover.




3.3 Installing SODIMM


1. Unscrew three screws on the chassis: one screw on front panel, one screw on system left side, and one screw on system right side.




2. Hold the chassis top cover. Pull the system main body following the below direction so the top cover can be separated from it.

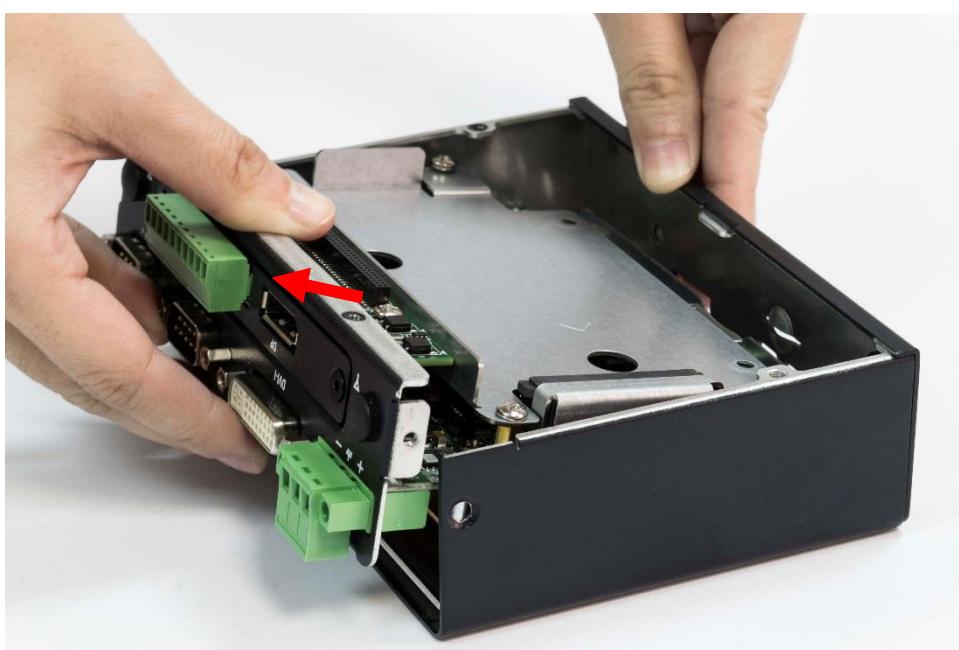


3. System main body and top cover separated.

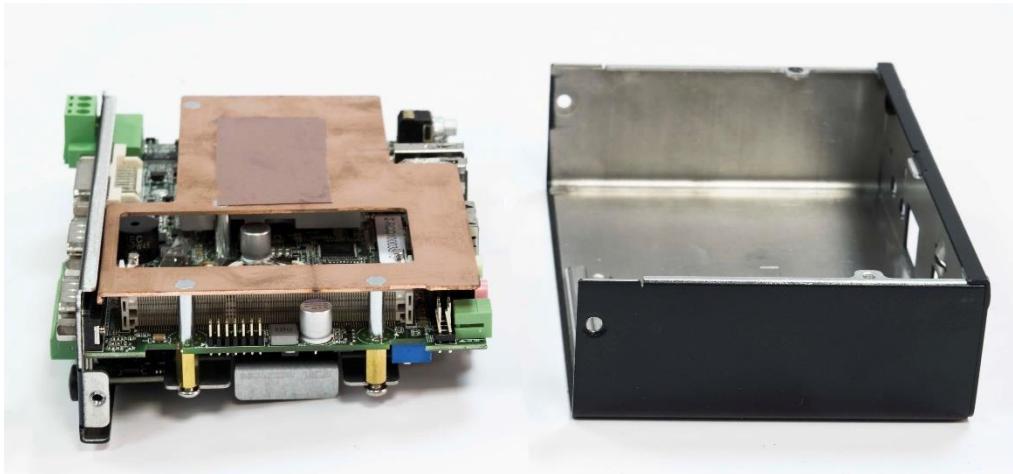

4. Insert memory module from 45 degree direction.

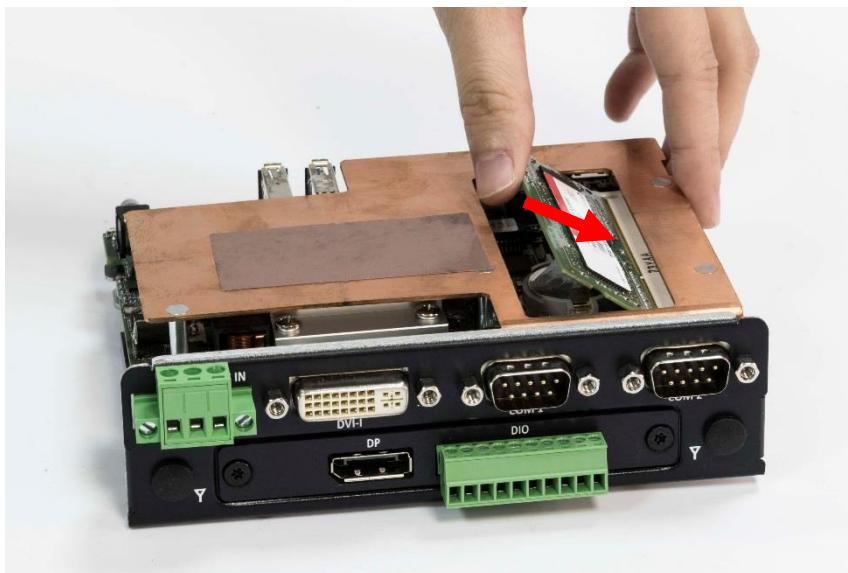


5. Press the memory module vertically downward until you hear the “click” sound. Make sure the memory module is firmly in place.

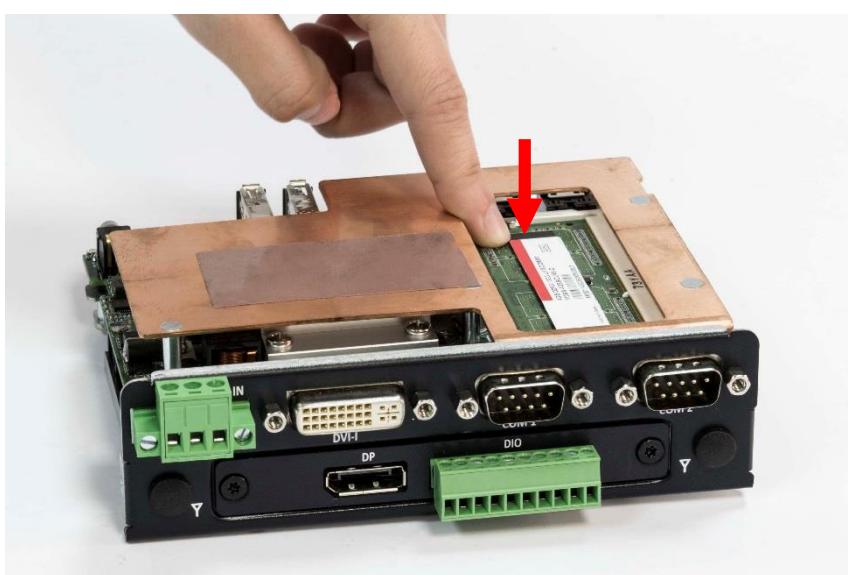


3.4 Installing SATA HDD/SSD


1. Remove HDD bracket by unscrewing the four screws.

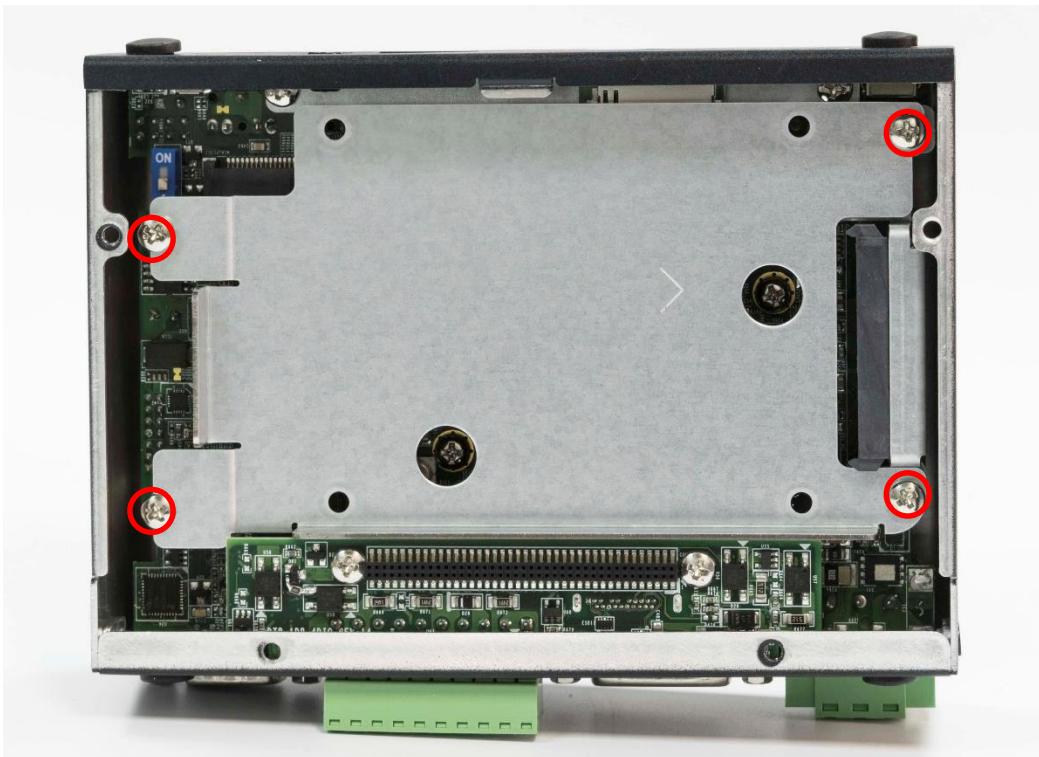

2. Lock the 2.5" HDD with HDD bracket using four screws.

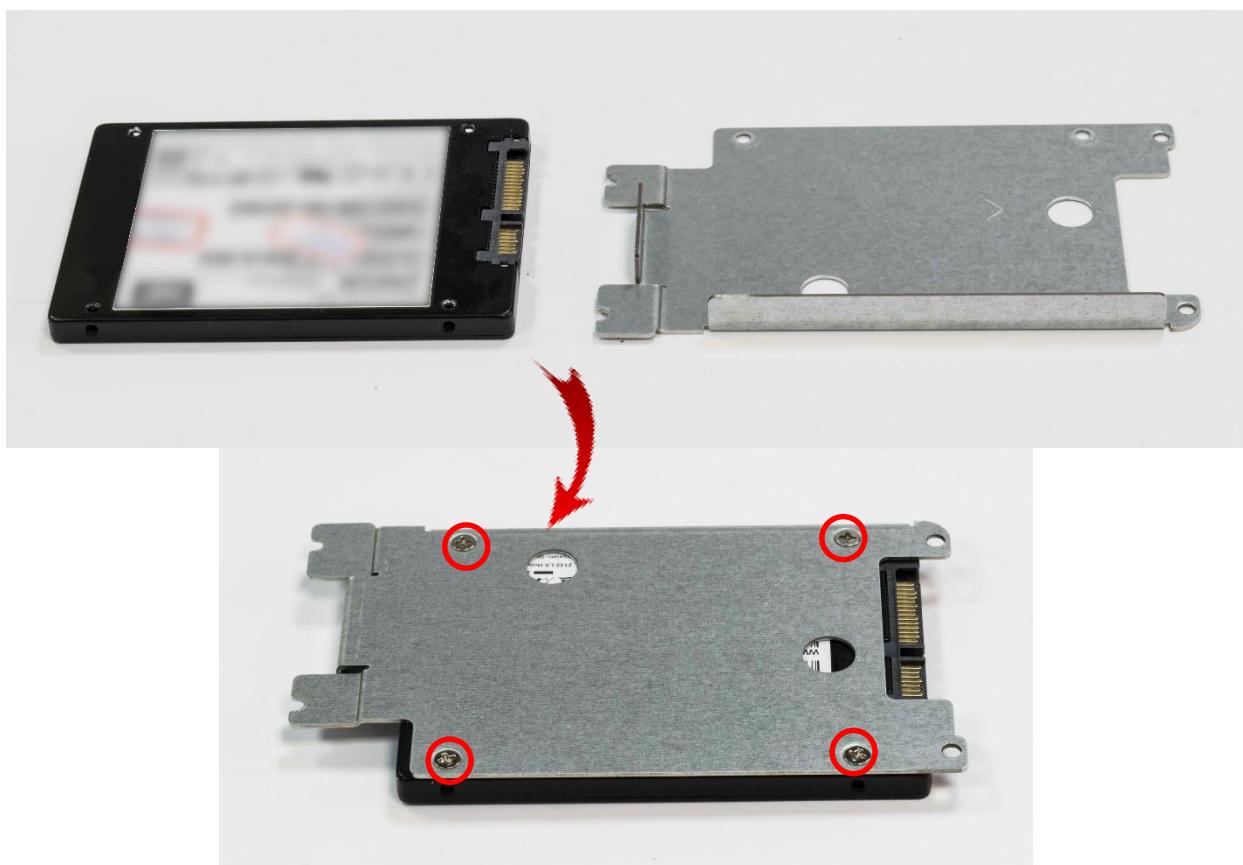

3. Insert the entire bracket following the below direction so the SATA connector is firmly plugged into the HDD.

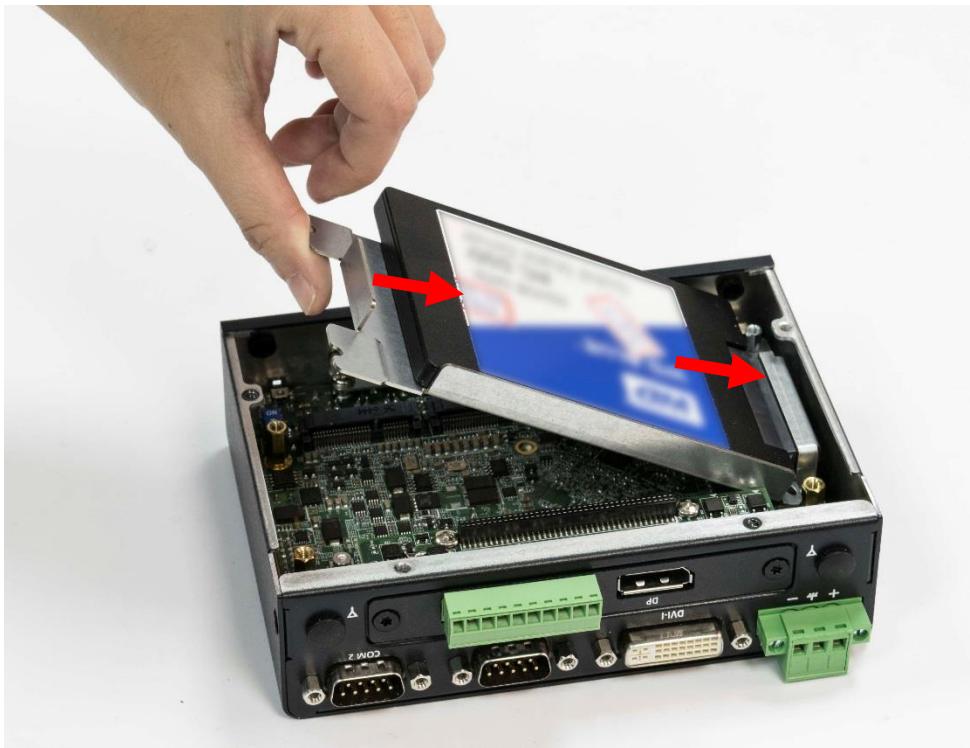

4. Fasten the four screws to lock the HDD bracket in place.



3.5 Installing Mini PCIe card / mSATA

1. Place the system body upside down so you can see the 2x mini card socket. Mini PCIe 2 (CN3) can support mSATA.



2. Insert mini PCIe card or mSATA module from 45 degree direction.



3. Press the mini PCIe card or mSATA module down and lock it with two screws.



3.6 Installing antenna

1. Remove antenna hole cover on the system panel.



2. Have antenna jack penetrate through the hole.



3. Put on washer and fasten the nut with antenna jack.



4. Assemble the antenna and antenna jack together.



5. Attach the RF connector at the cable-end onto the communication module.



3.7 Assemble chassis bottom cover

1. Place the bottom cover according to the below direction.



2. Lock the bottom cover with the four screws.



3.8 Installing SIM card

1. SIM card socket is located on the front panel of the system.



2. Now you can insert SIM card into the socket.



3. To uninstall SIM card, simply press the installed SIM card and then the card will be pushed out.



Chapter 4

BIOS Setup

4.1 BIOS Introduction

The system BIOS software is stored on EEPROM. The BIOS provides an interface to modify the configuration. When the battery is removed, all the parameters will be reset.

BIOS Setup

Power on the embedded system and by pressing or <F2> immediately allows you to enter the setup screens. If the message disappears before you respond and you still wish to enter the Setup, restart the system by turning it OFF and ON or pressing the RESET button.

You may also restart the system by simultaneously pressing <Ctrl>, <Alt>, and <Delete> keys.

Control Keys	
<↔> <→>	Select Screen
<↑> <↓>	Select Item
<Enter>	Select
<Page Up/+>	Increases the numeric value or makes changes
<Page Down/->	Decreases the numeric value or makes changes
<F1>	General Help
<F2>	Previous Value
<F3>	Load Optimized Defaults
<F4>	Save Configuration and Exit
<Tab>	Select Setup Fields
<Esc>	Exit BIOS Setup

Main Setup


The main menu lists the setup functions you can make changes to. You can use the arrow keys (↑↓) to select the item. The on-line description of the highlighted setup function is displayed at the bottom of the screen.

General Help <F1>

The BIOS setup program provides a General Help screen. You can call up this screen from any menu by simply pressing <F1>. The Help screen lists the appropriate keys to use and the possible selections for the highlighted item. Press <Esc> to exit the Help screen.

4.2 Main Setup

Press to enter BIOS CMOS Setup Utility. The Main setup screen is showed as following when the setup utility is entered. System Date/Time is set up in the Main Menu.

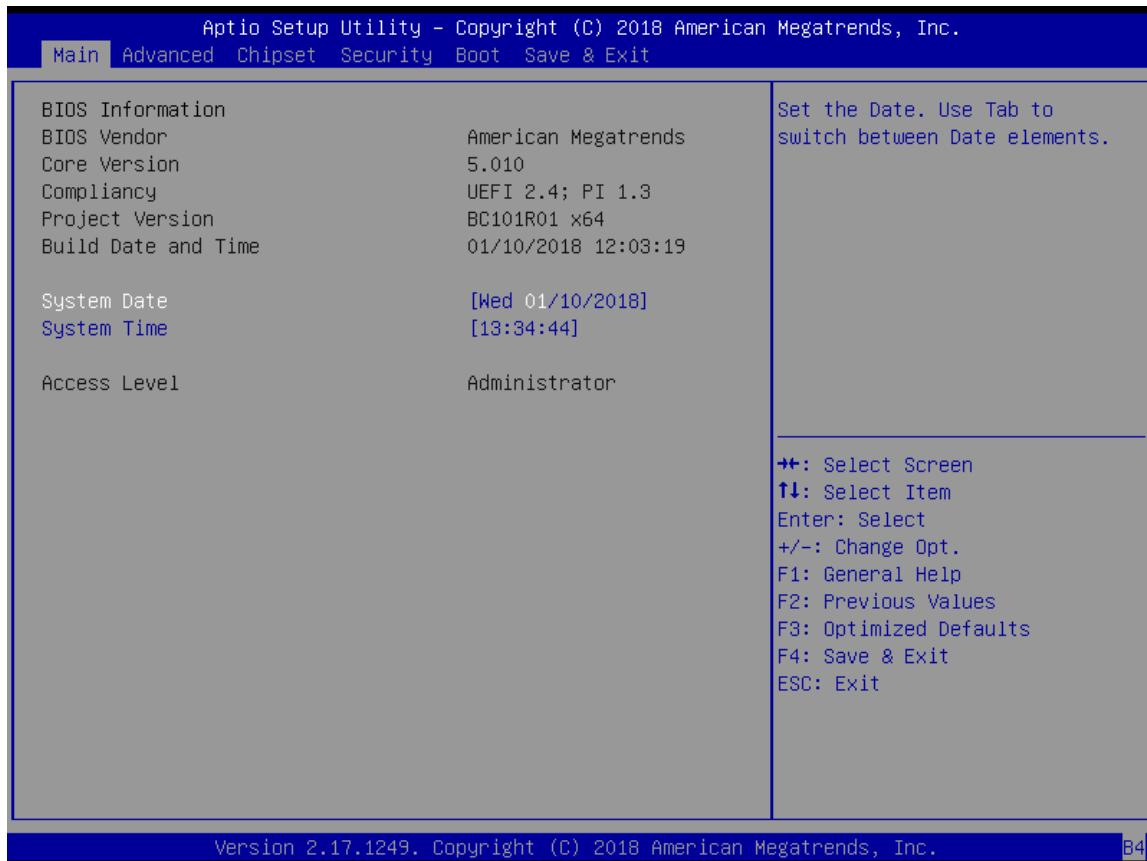


4.2.1 System Date

Set the system date. Please use <Tab> to switch between data elements.


4.2.2 System Time

Set the system time. Please use <Tab> to switch between time elements.

4.3 Advanced Setup

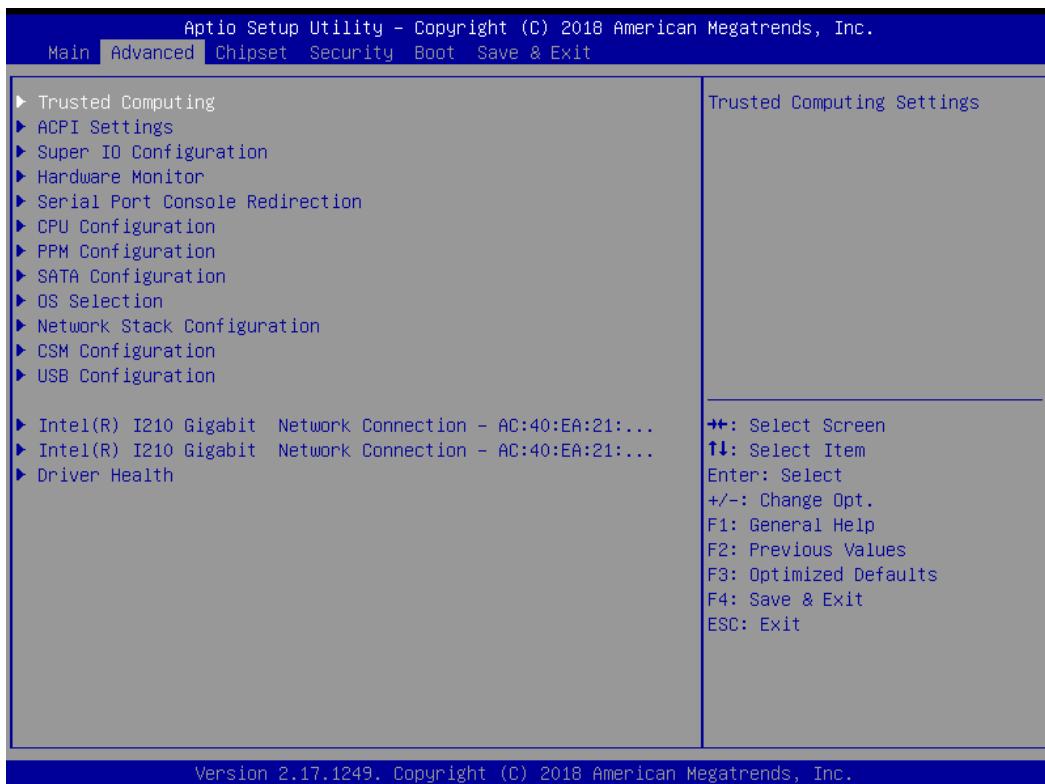


4.3.1 Trusted Computing (Optional)

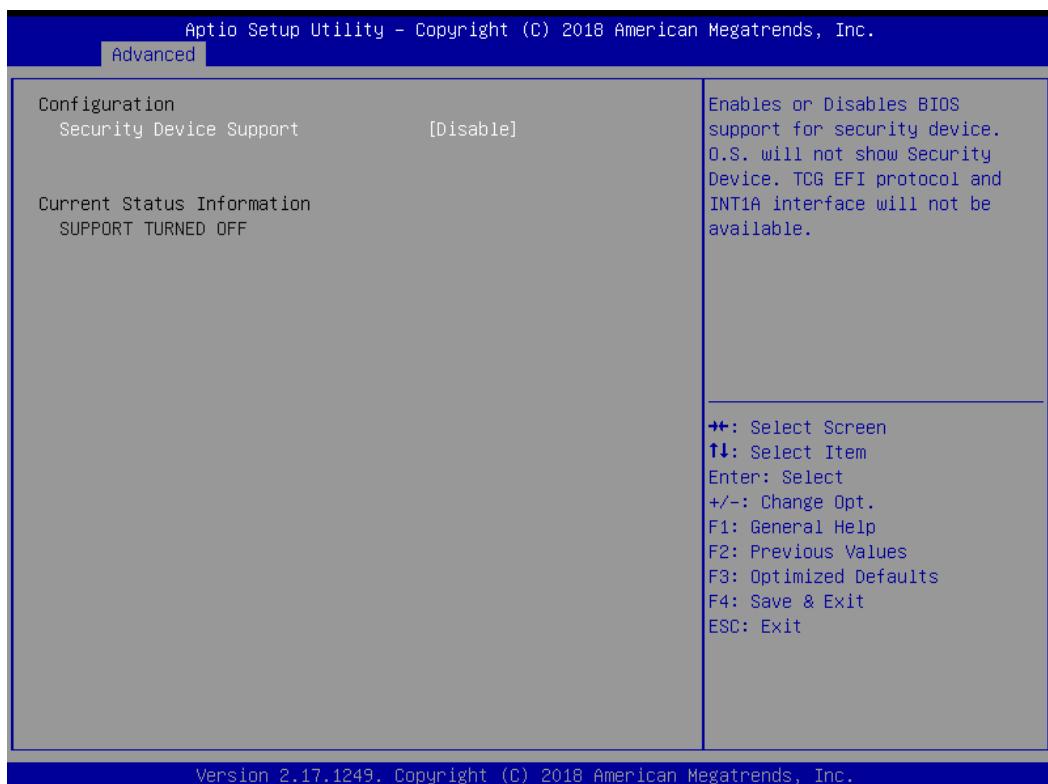

■ Security Device Support

Enable or disable TPM function

4.3.2 ACPI Settings

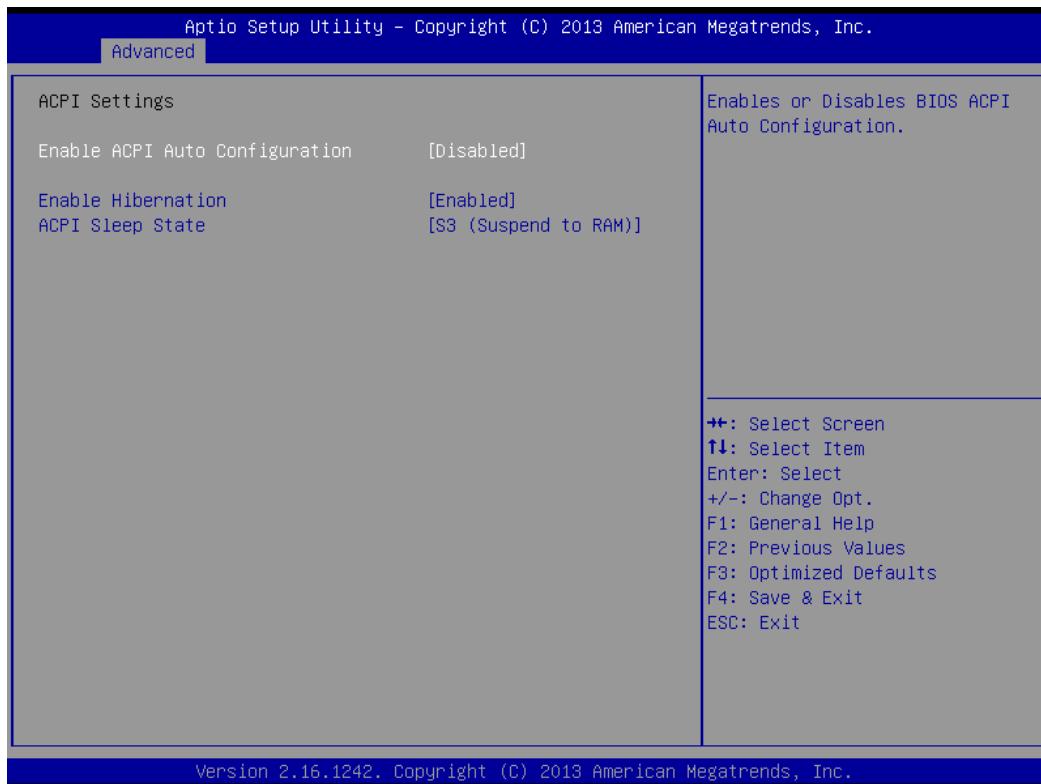

■ Enable ACPI Auto Configuration

This item allows you to enable or disable BIOS ACPI Auto Configuration.

■ Enable Hibernation


This item allows you to enable or disable system ability to hibernate.

■ ACPI Sleep State


This item selects the highest ACPI sleep state the system will enter when the suspend button is pressed. Select <Suspend Disabled> or <S3 (Suspend to RAM)>.

4.3.3 Super IO Configuration

This setting allows you to select options for the Super IO Configuration, and change the value of the selected option.

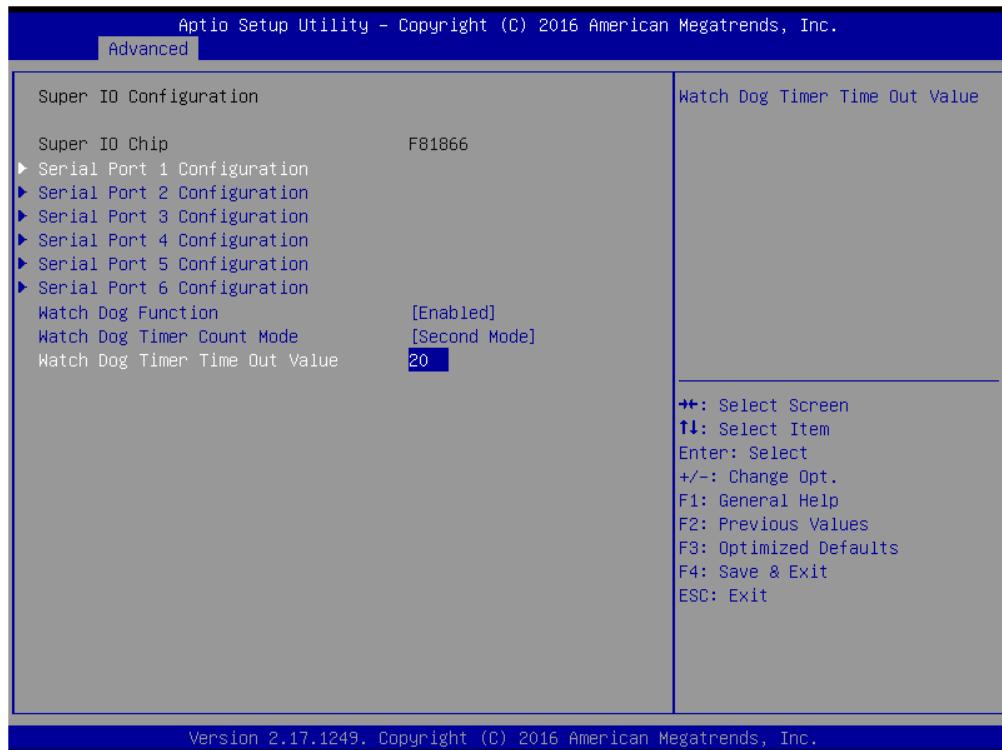

■ Serial Port 1 Configuration

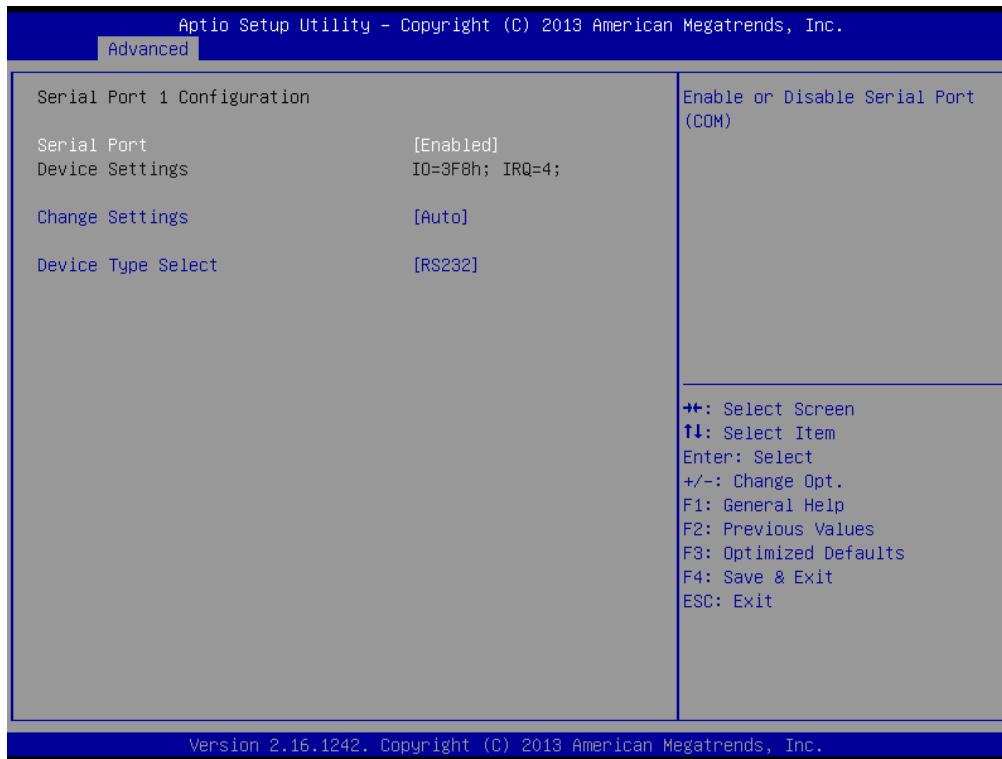

Serial Port

This item allows you to enable or disable serial port.

Change Settings

This item allows you to change the address & IRQ settings of the specified serial port.

Device Type Select

Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

■ Serial Port 2 Configuration



Serial Port

This item allows you to enable or disable serial port.


Change Settings

This item allows you to change the address & IRQ settings of the specified serial port.

Device Type Select

Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

■ Serial Port 3 Configuration

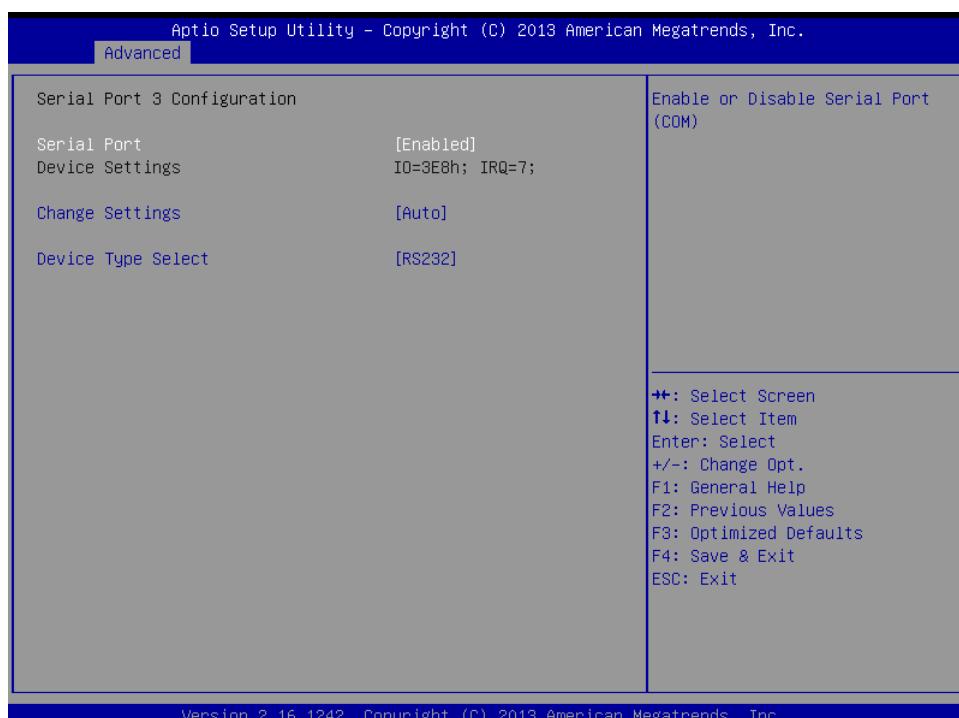

Serial Port

This item allows you to enable or disable serial port.


Change Settings

This item allows you to change the address & IRQ settings of the specified serial port.

Device Type Select

Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

■ Serial Port 4 Configuration

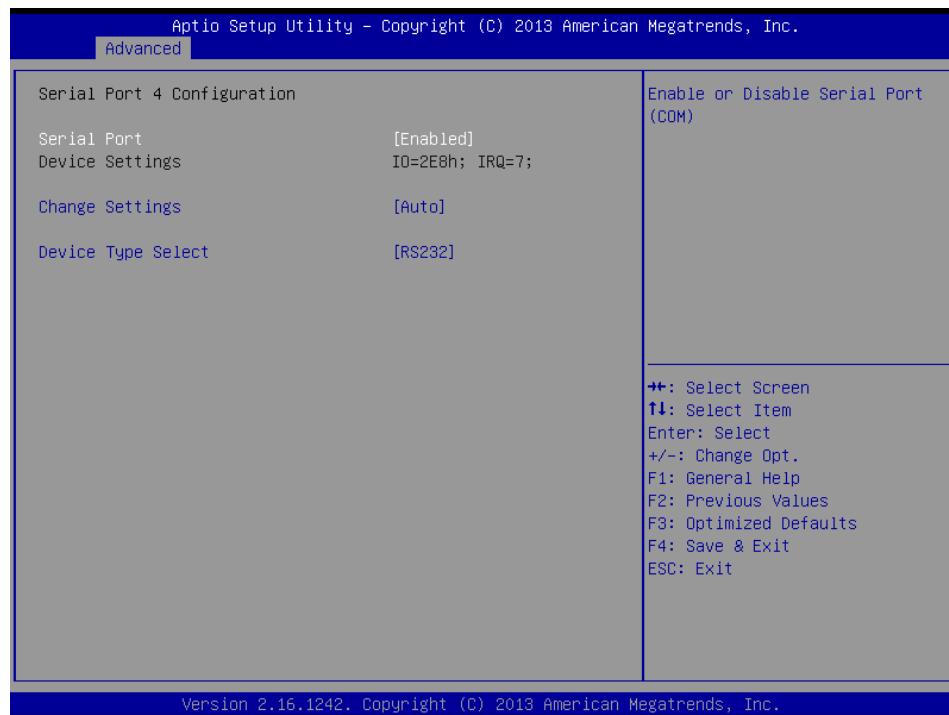

Serial Port

This item allows you to enable or disable serial port.


Change Settings

This item allows you to change the address & IRQ settings of the specified serial port.

Device Type Select

Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

■ Serial Port 5 Configuration

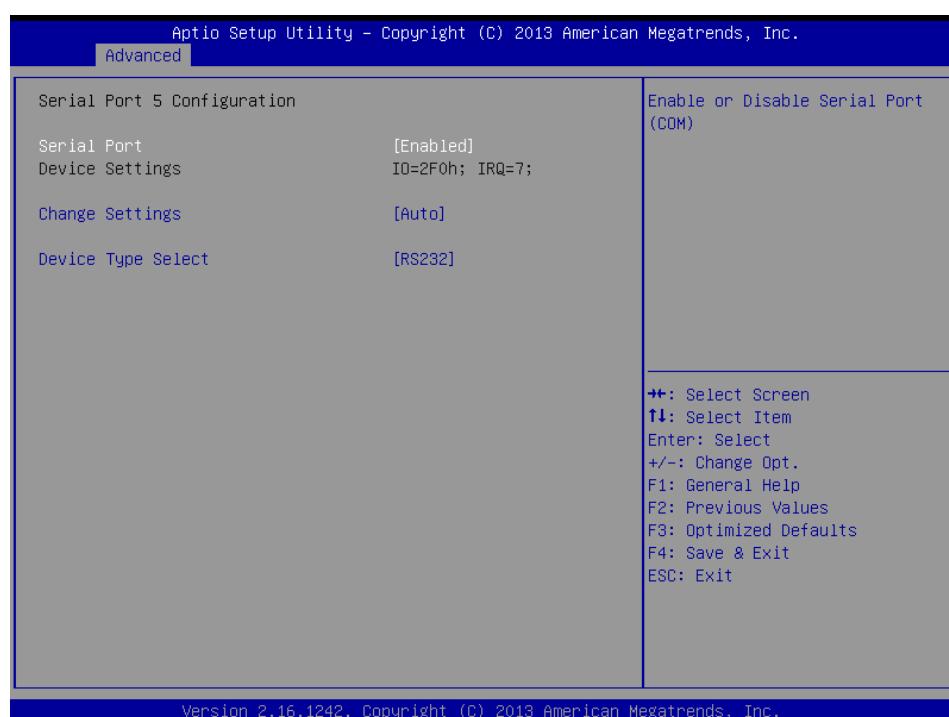

Serial Port

This item allows you to enable or disable serial port.


Change Settings

This item allows you to change the address & IRQ settings of the specified serial port.

Device Type Select

Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

■ Serial Port 6 Configuration

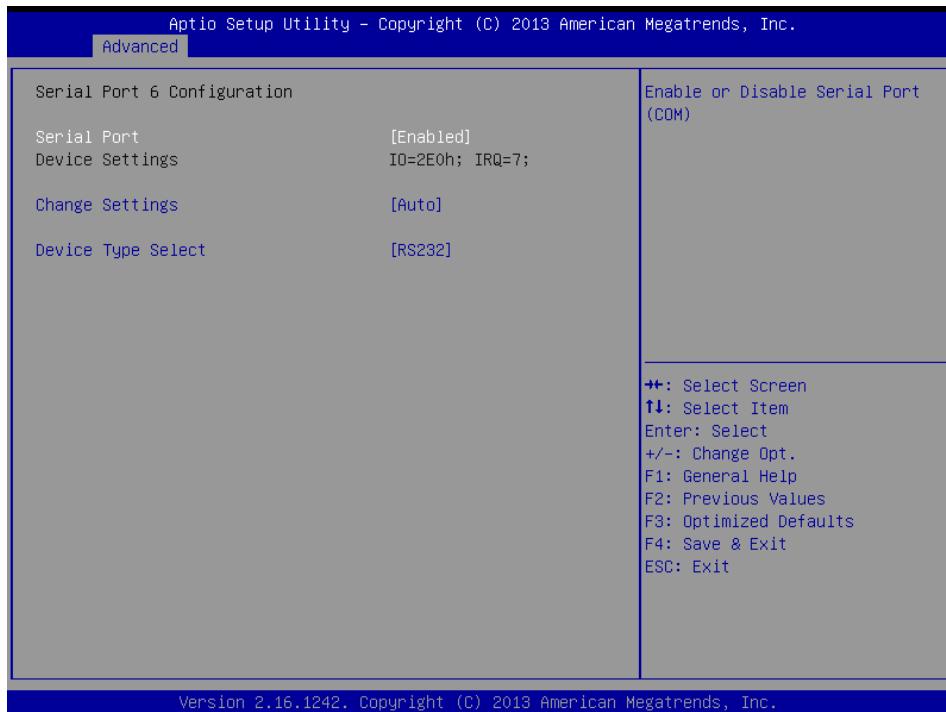

Serial Port

This item allows you to enable or disable serial port.

Change Settings

This item allows you to change the address & IRQ settings of the specified serial port.

Device Type Select

Change the Serial interface. Select <RS232> ,<RS422 Full Duplex> or <RS485 Half Duplex> interface.

■ Watch Dog Function

This setting allows you to setup the system watch-dog timer, a hardware timer that generates a reset when the software that it monitors does not respond as expected each time the watch dog polls it.

Watch Dog Timer Count Mode


Change the Watch dog mode. Select <Second Mode> or <Minute Mode> mode.

Watch Dog Timer Time Out Value


User can set a value in the range of 0 to 255.

4.3.4 Hardware Monitor

These items display the current status of all monitored hardware devices/ components such as voltages and temperatures.

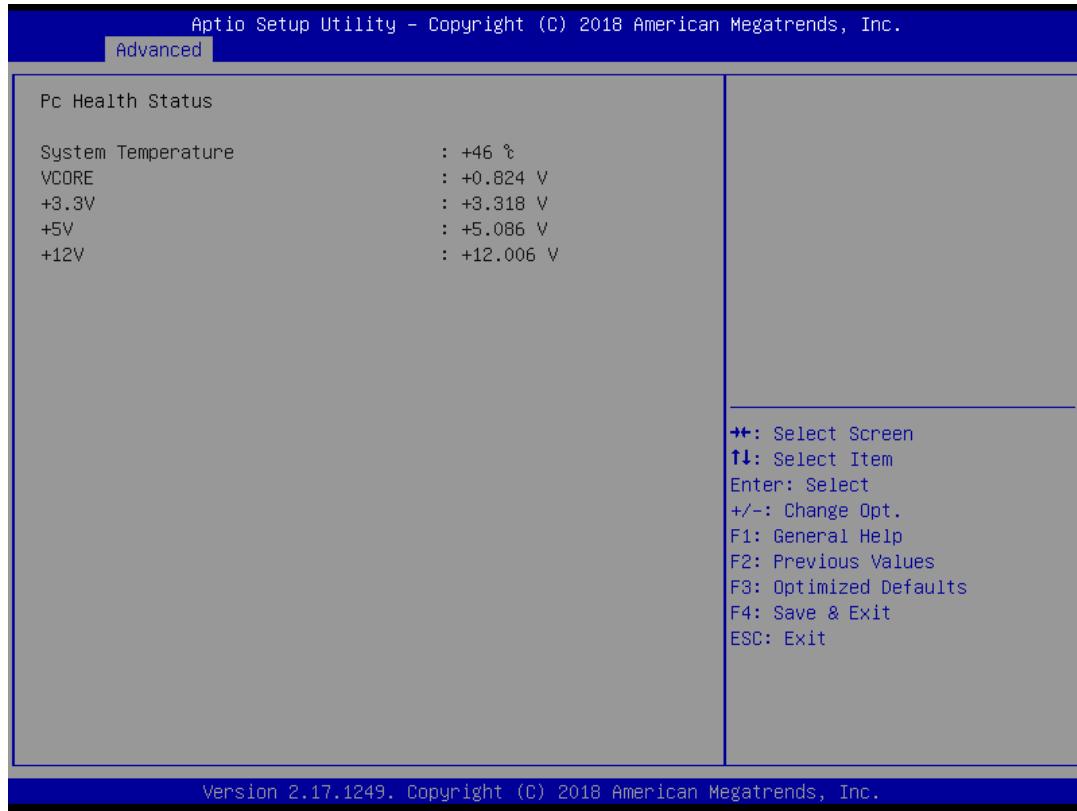


4.3.5 Serial Port Console Redirection

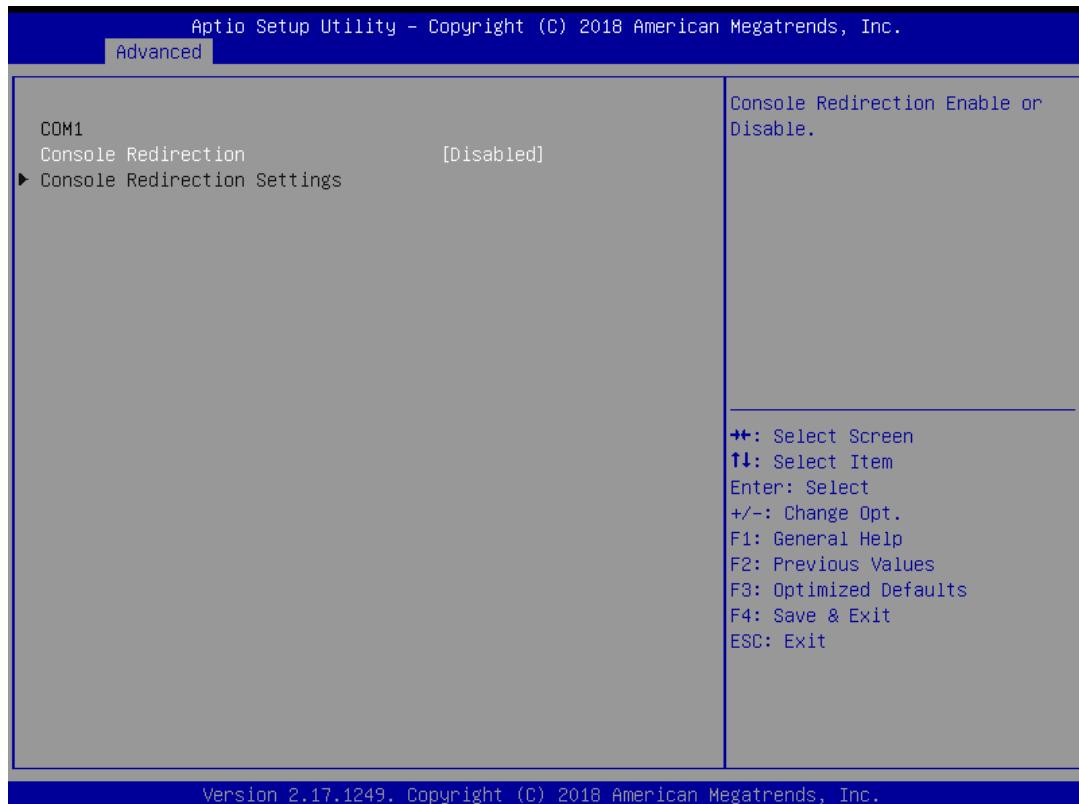

■ Console Redirection

These items allows you to enable or disable COM1 console redirection.


4.3.6 CPU Configuration

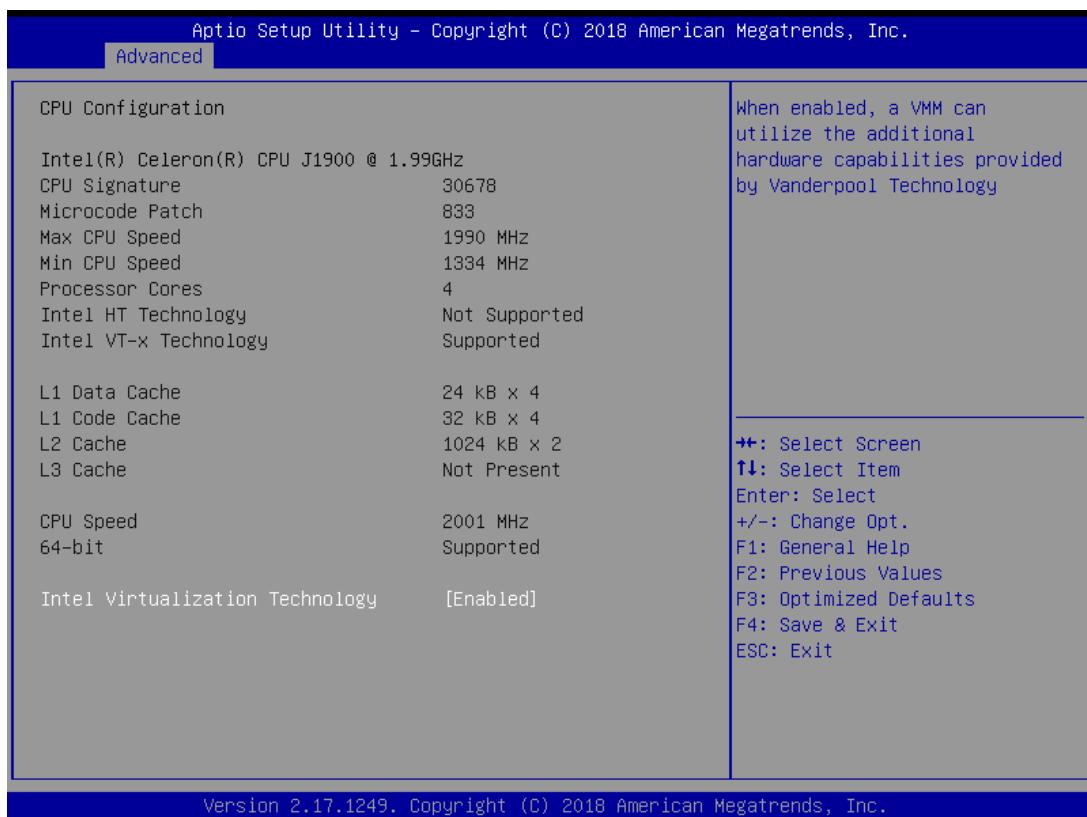

■ Intel Virtualization Technology

Virtualization enhanced by Intel Virtualization Technology will allow a platform to run multiple operating systems and applications in independent partitions. With virtualization, one computer system can function as multiple Virtual systems.

4.3.7 PPM Configuration

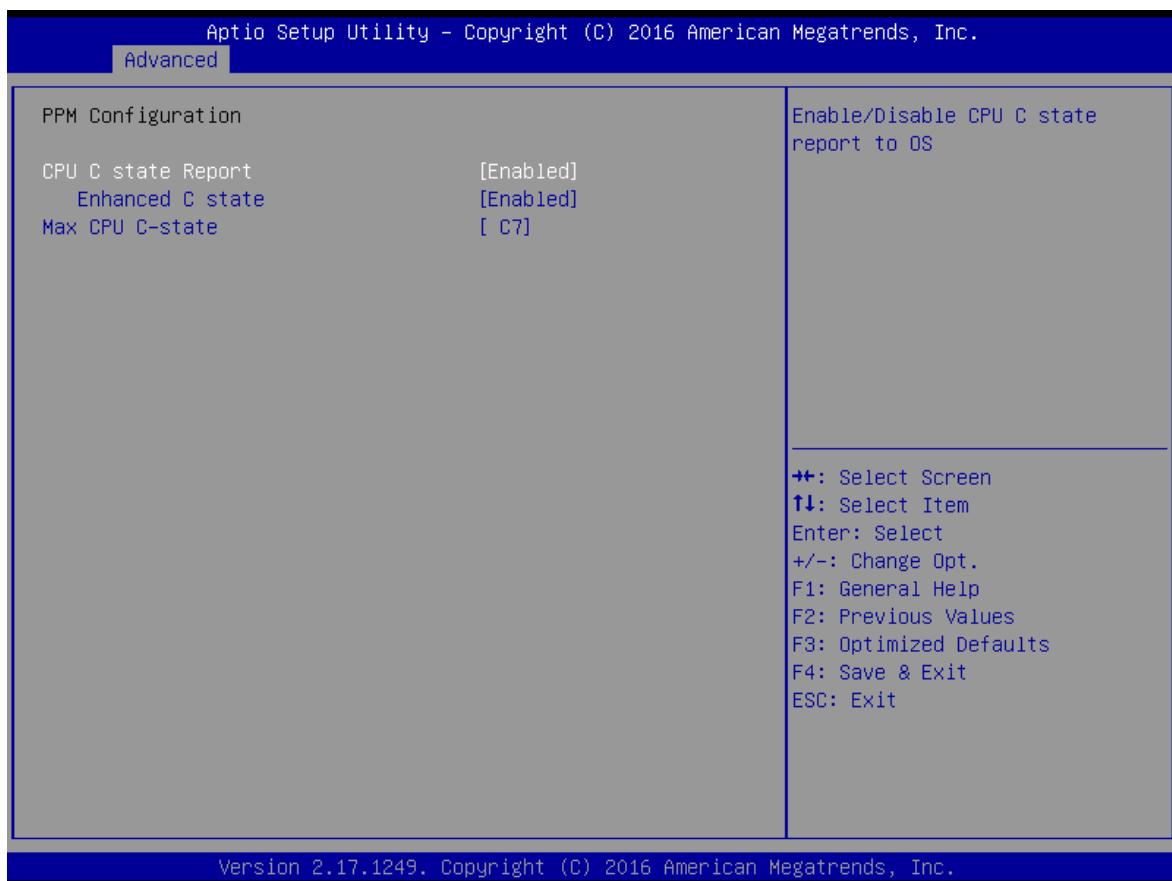

■ CPU C state Report

Enables or disables support for CPU's power-saving functions.


■ Enhanced C state

Enables or disables Intel CPU Enhanced Halt (C1E) function, a CPU power-saving function in system halt state. When enabled, the CPU core frequency and voltage will be reduced during system halt state to decrease power consumption. This item is configurable only when CPU C state Report is enabled.

■ Max CPU C-state

This item allows you to determine the maximum C state that the CPU will support.

4.3.8 SATA Configuration

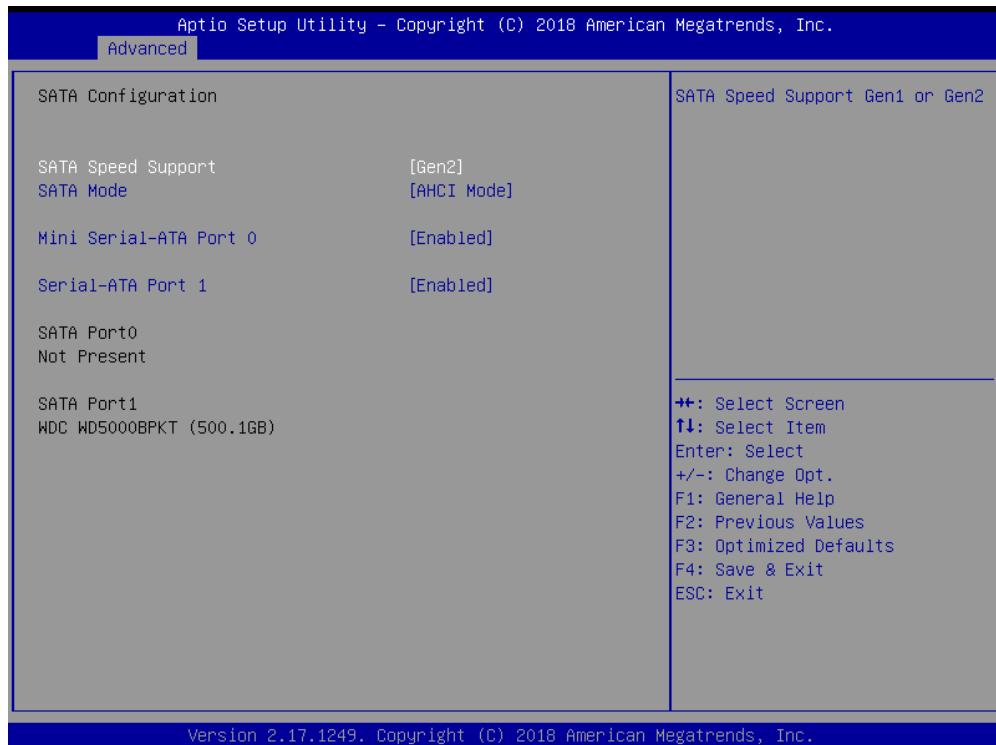

■ SATA Speed Support

Change the SATA Speed. Select <Gen1> or <Gen2> speed.

■ SATA Mode

This item allows you to select IDE or AHCI Mode.


■ Mini Serial – ATA Port 0

This item allows you to enable or disable Serial-ATA Port 0.


■ Serial – ATA Port 1

This item allows you to enable or disable Serial-ATA Port 1.

4.3.9 OS Selection

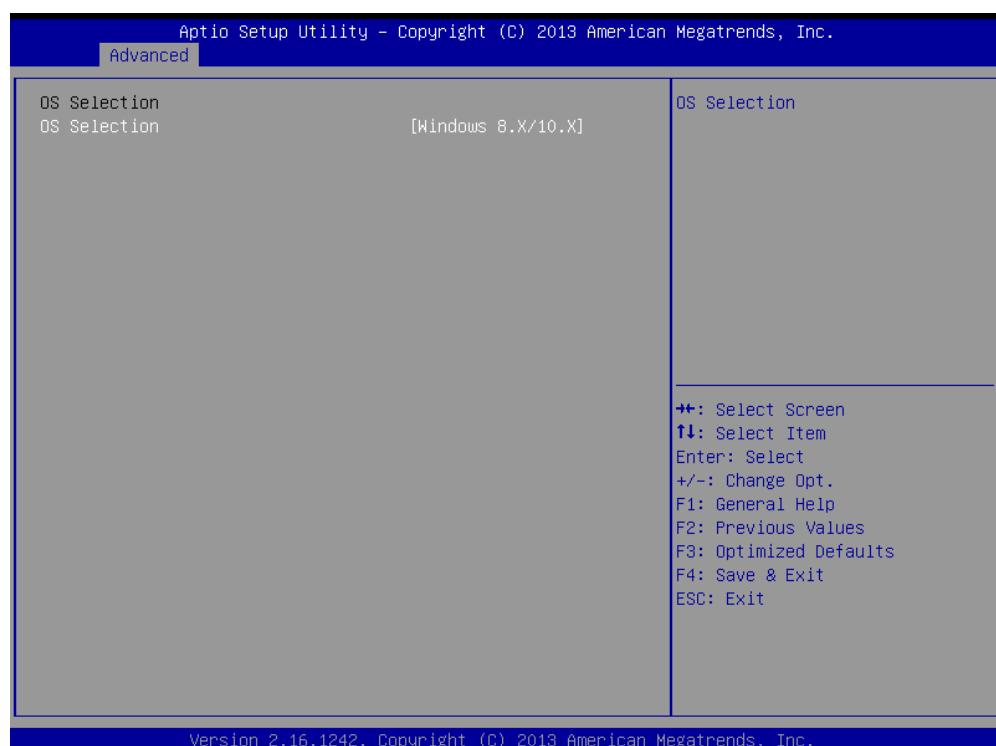

4.3.10 CSM Configuration

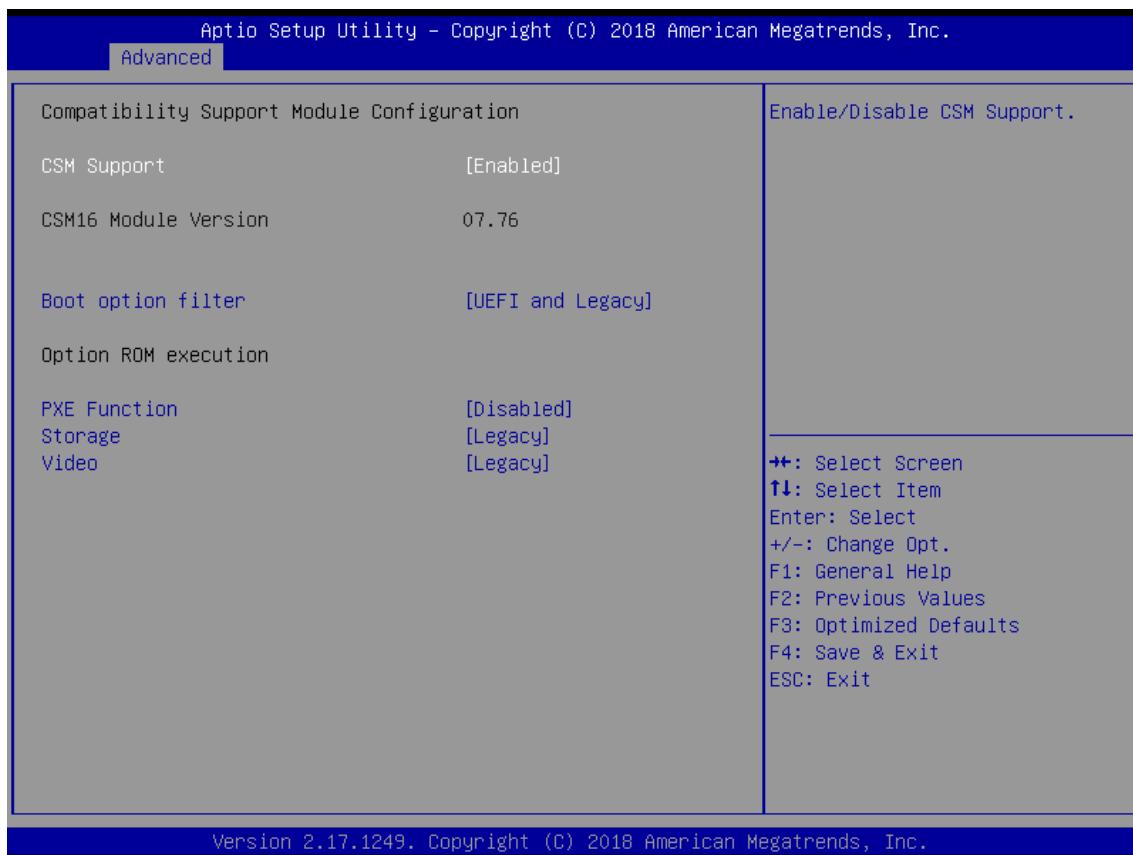

■ CSM Support

Enables or disables UEFI CSM (Compatibility Support Module) to support a legacy PC boot process.

■ Boot option filter

This item allows you to select which type of operating system to boot.

UEFI and Legacy: Allows booting from operating systems that support legacy option ROM or UEFI option ROM.

Legacy only: Allows booting from operating systems that only support legacy option ROM.

UEFI only: Allows booting from operating systems that only support UEFI option ROM.

This item is configurable only when CSM Support is set to Enabled.

■ PXE Function

This item allows you to enable or disable PXE function.

■ Storage

This setting allows you to select whether to enable the UEFI or legacy option ROM for the storage device controller.

Do not launch: Disables option ROM.

UEFI only: Enables UEFI option ROM only.

Legacy only: Enables legacy option ROM only.

■ Video


This item allows you to select whether to enable the UEFI or legacy option ROM for the storage device controller.

Do not launch: Disables option ROM.

UEFI only: Enables UEFI option ROM only.

Legacy only: Enables legacy option ROM only.

4.3.11 USB Configuration

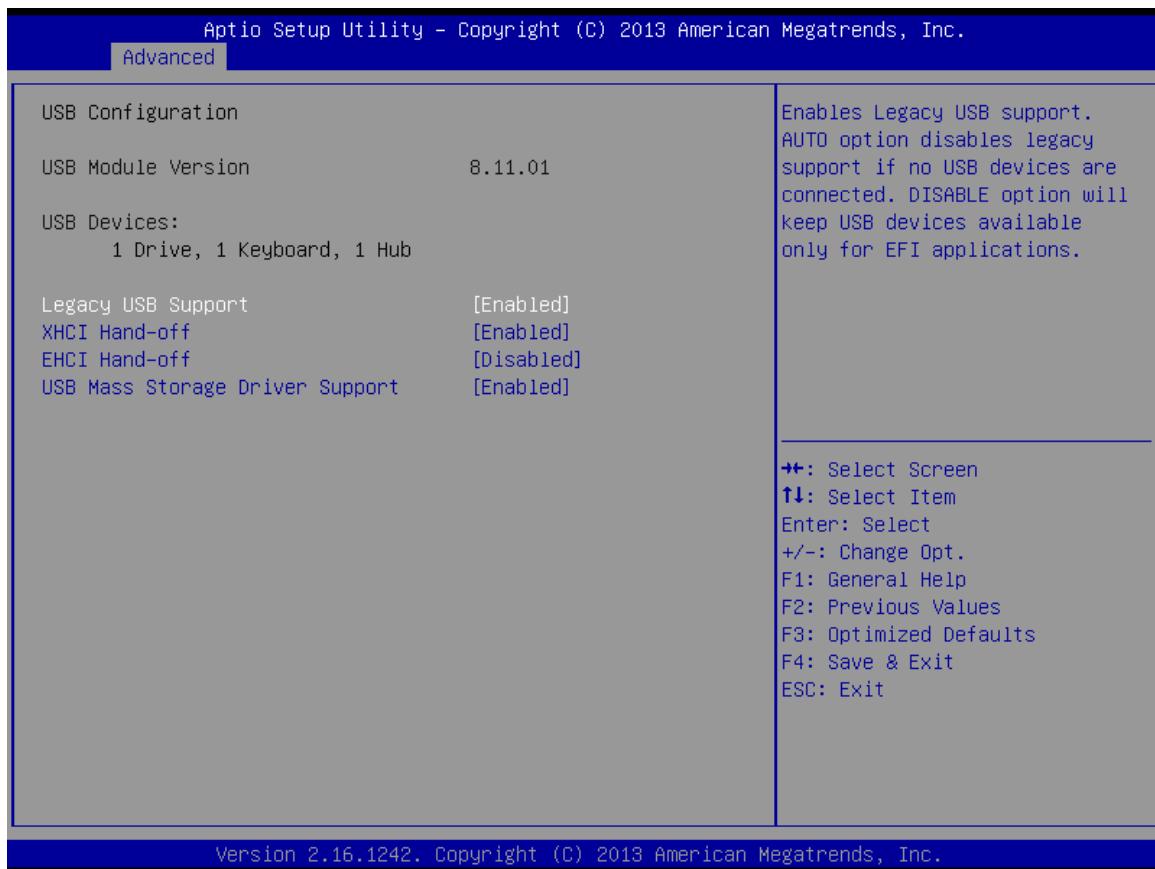

■ Legacy USB Support

Allows USB keyboard/ mouse to be used in MS-DOS.

■ XHCI Hand-off

Determines whether to enable XHCI (USB3.0) Hand-off feature for an operating system without XHCI (USB3.0) Hand-off support.

■ EHCI Hand-off

Determines whether to enable EHCI Hand-off feature for an operating system without EHCI Hand-off support.

■ USB Mass Storage Driver Support


Enables or disables support for USB storage devices.

4.4 Chipset




4.4.1 North Bridge

This section provides information on the installed memory size and memory/onboard graphics-related configuration options.

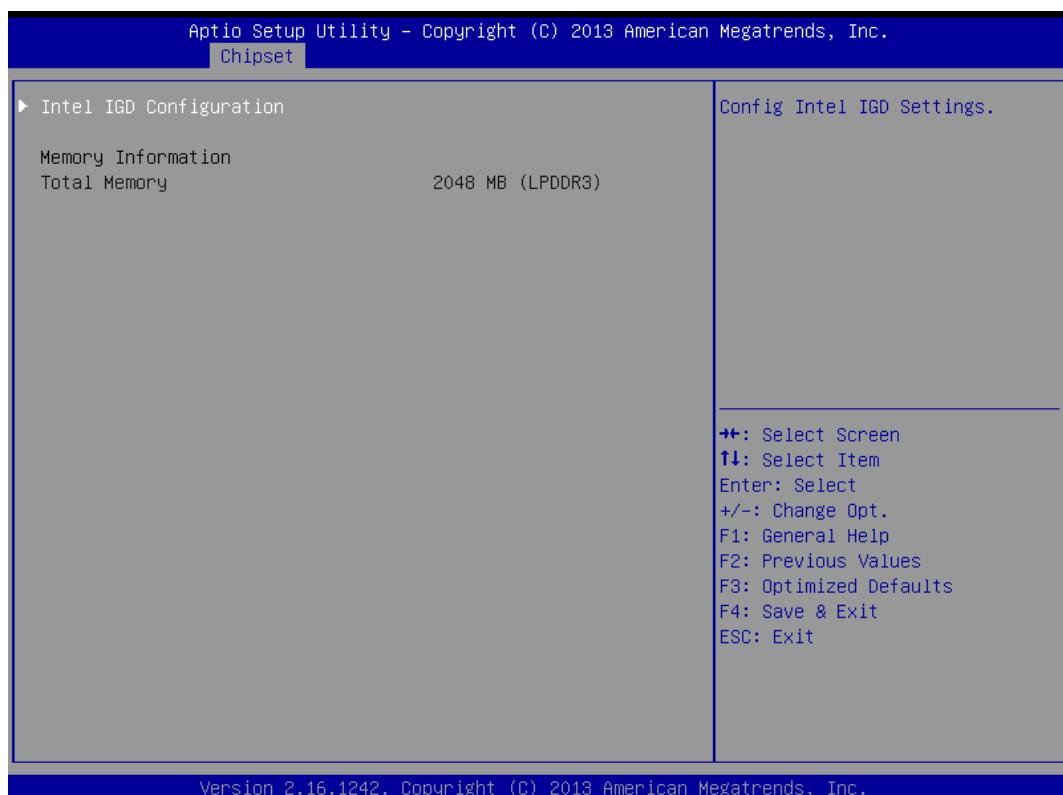

■ Intel IGD Configuration

This section provides onboard graphics-related configuration options.

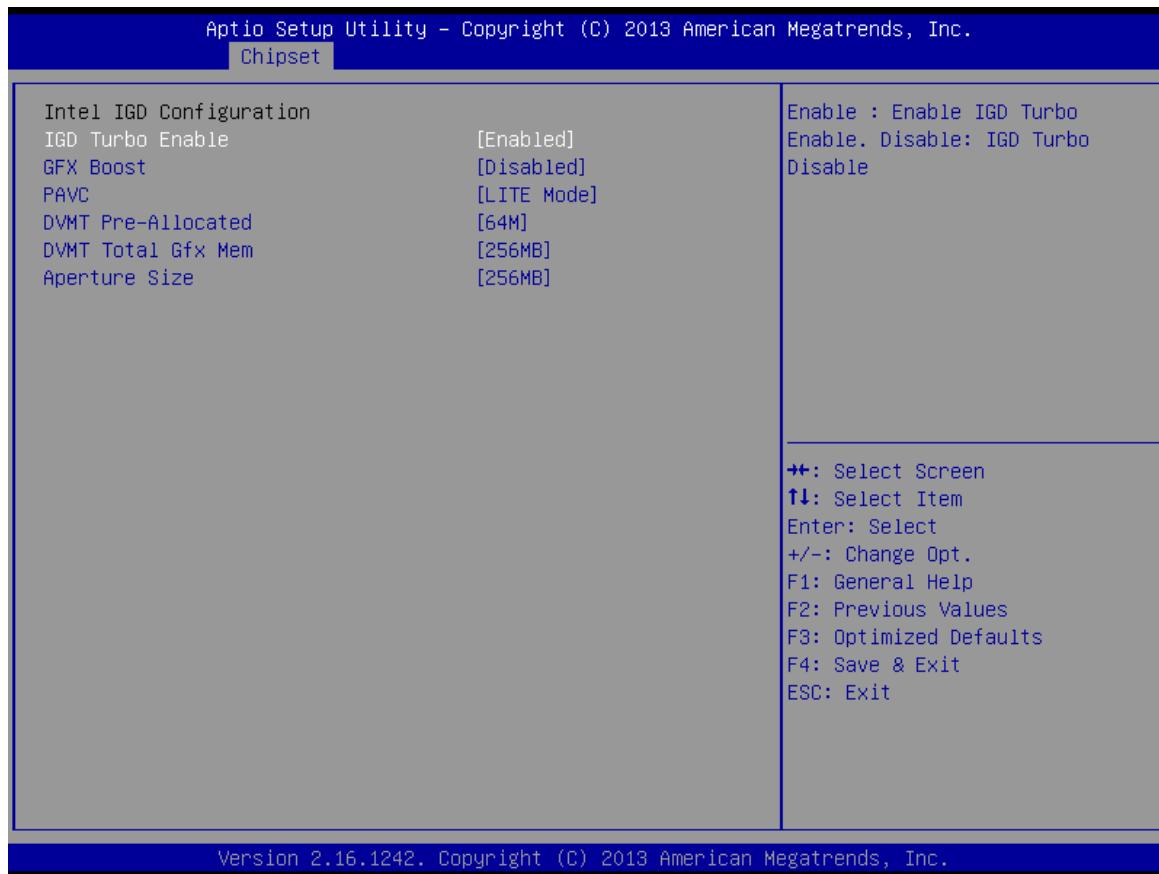

IGD Turbo Enable

This item allows you to enable or disable IGD Turbo.

GFX Boost

This item allows you to enable or disable GFX Boost.

PAVC

This item enables/disables Protected Audio Video Control. Select <Disabled>, <LITE Mode> or <SERPENT Mode>.

DVMT Pre-Allocated

This item selects DVMT 5.0 Pre-Allocated (Fixed) Graphics Memory size used by the Internal Graphics Device. . Select <64M>, <96M>, <128M>, <160M>, <192M>, <224M>, <256M>, <288M>, <320M>, <352M>, <384M>, <416M>, <448M>, <480M> or <512M>.


DVMT Total Gfx Mem

This item selects DVMT5.0 Total Graphic Memory size used by the Internal Graphics Device. Select <128MB>, <256MB> or <Max>.

Aperture Size

This item selects the Aperature Size. Select <128MB>, <256MB> or <512MB>.

4.4.2 South Bridge

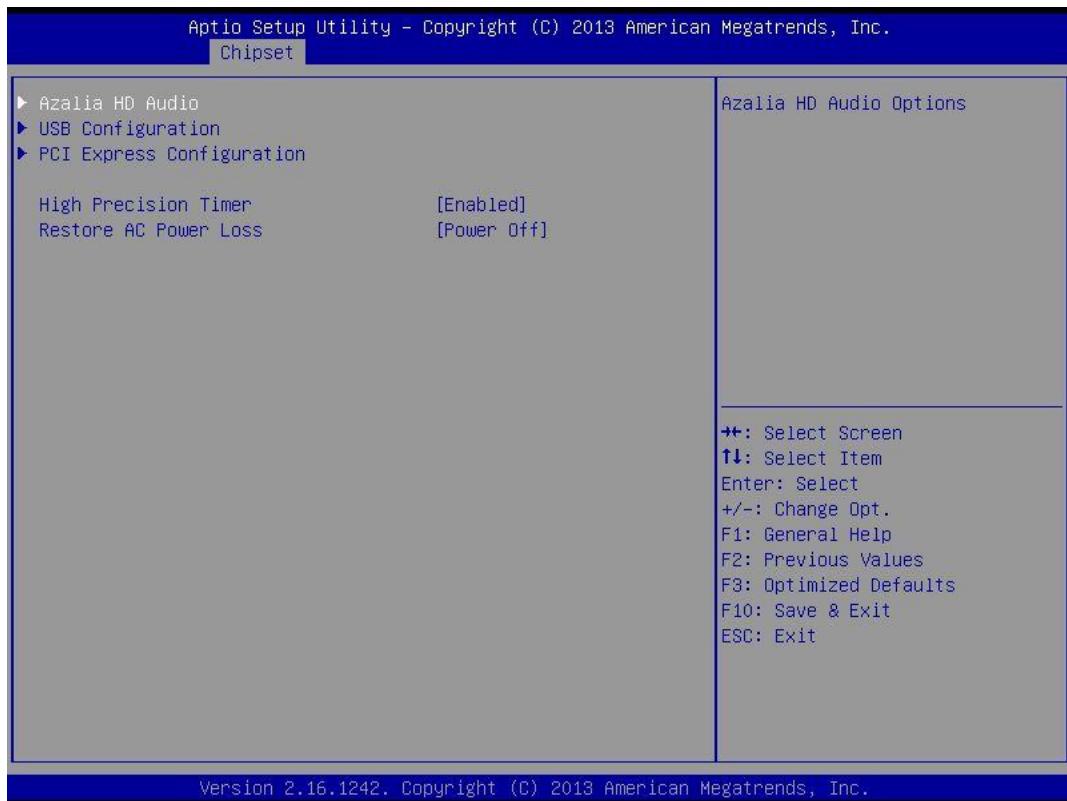

■ Azalia HD Audio

Control detection of the Azaliadevice.

Audio Controller

Enabled: Azalia will be unconditionally enabled.

Disabled: Azalia will be unconditionally disabled.

■ USB Configuration


XHCI Mode

This item allows you to enable or disable the USB XHCI controller.

USB 2.0 (EHCI) Support

This item allows you to enable or disable the USB EHCI support.

■ PCI Express Configuration

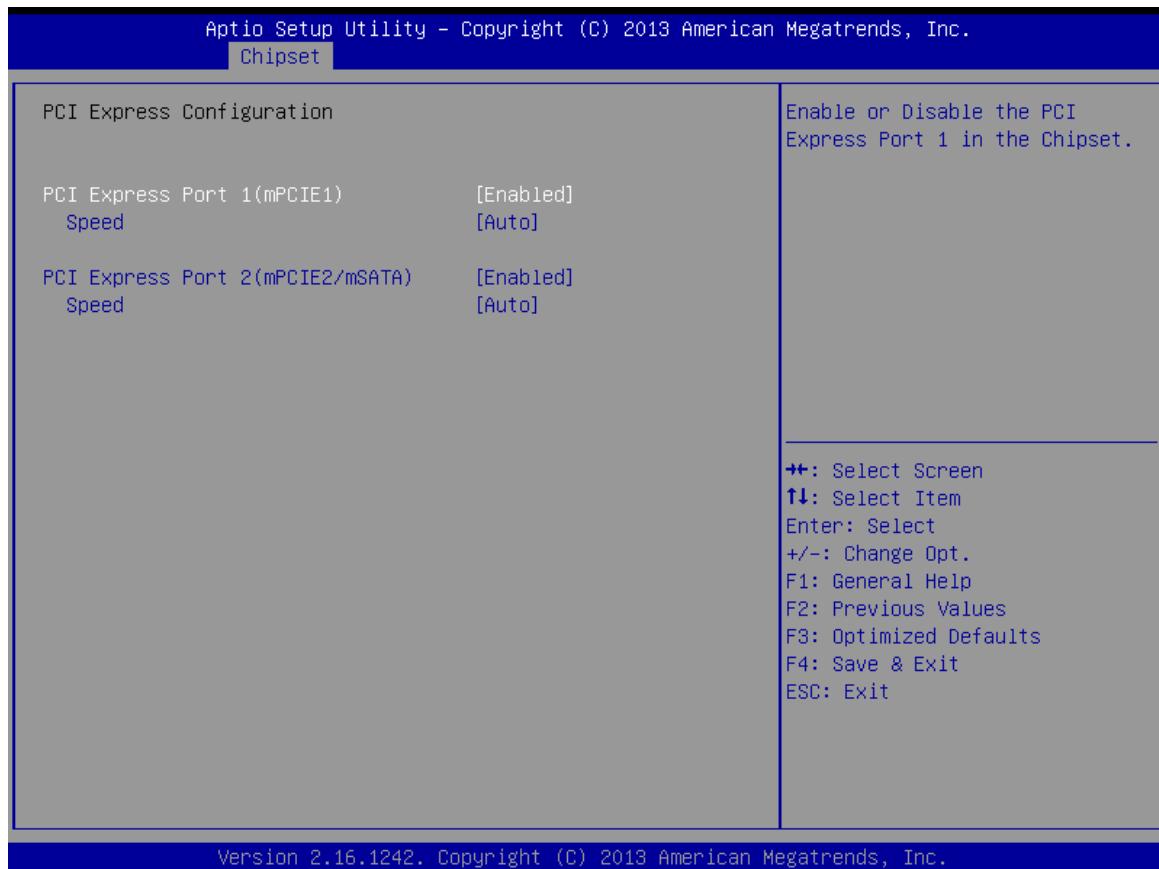

Version 2.16.1242. Copyright (C) 2013 American Megatrends, Inc.

PCI Express Port 1 (mPCIE1)

This item allows you to enable or disable PCI Express Port 1 (mPCIE1) in the Chipset.

Speed

Change the PCIe Port Speed. Select <AUTO> ,<Gen 2> or <Gen 1>

PCI Express Port 2 (mPCIE2/mSATA)

This item allows you to enable or disable PCI Express Port 2 (mPCIE2/mSATA) in the Chipset.

Speed

Change the PCIe Port Speed. Select <AUTO> ,<Gen 2> or <Gen 1>

■ High Precision Timer

Enable or disable High Precision Event Timer (HPET) in the operating system.

■ Restore AC Power Loss

This item specifies whether your system will reboot after a power failure or interrupt occurs. Available settings are:


Power Off: Leave the computer in the power off state.

Power On: Leave the computer in the power on state.

Last State: Restore the system to the previous status before power failure or interrupt occurred.

4.5 Security

Security menu allow you to change administrator password and user password settings.

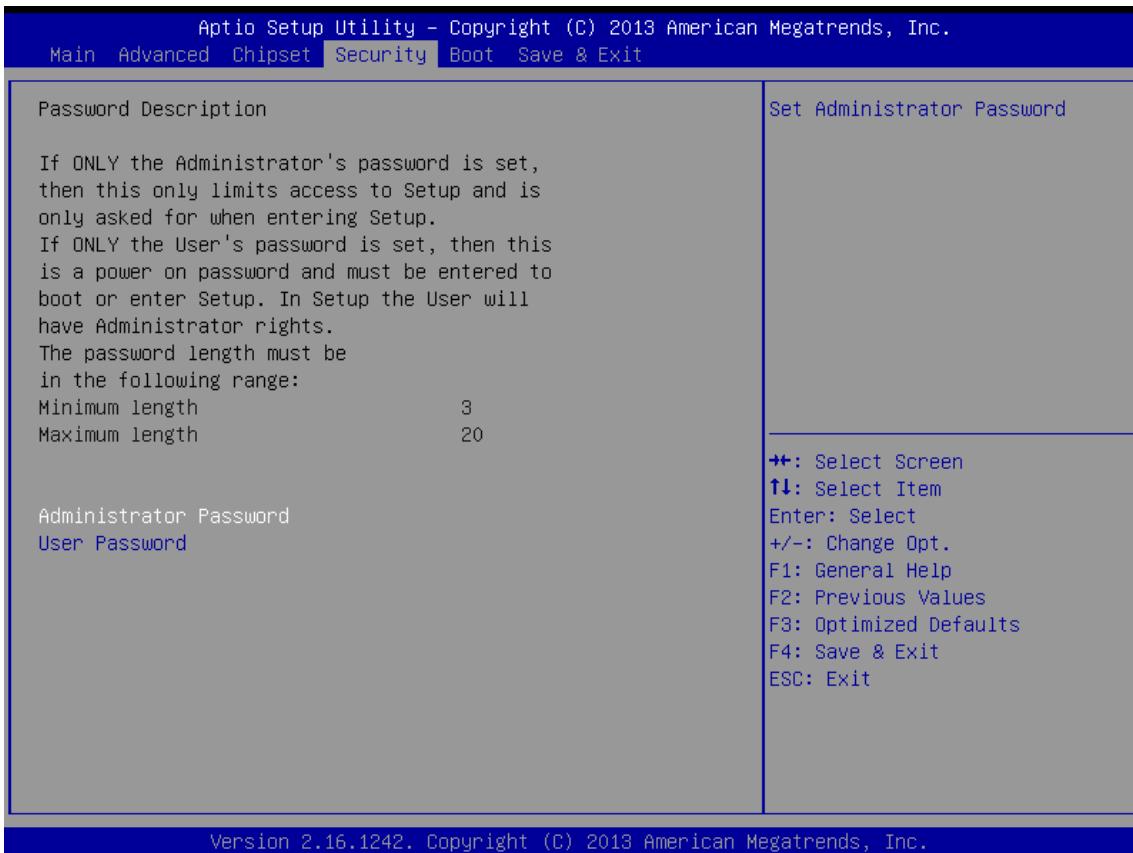

4.5.1 Administrator Password


This item allows you to set Administrator Password.

4.5.2 User Password

This item allows you to set User Password.

4.6 Boot

This menu allows you to setup the system boot options.

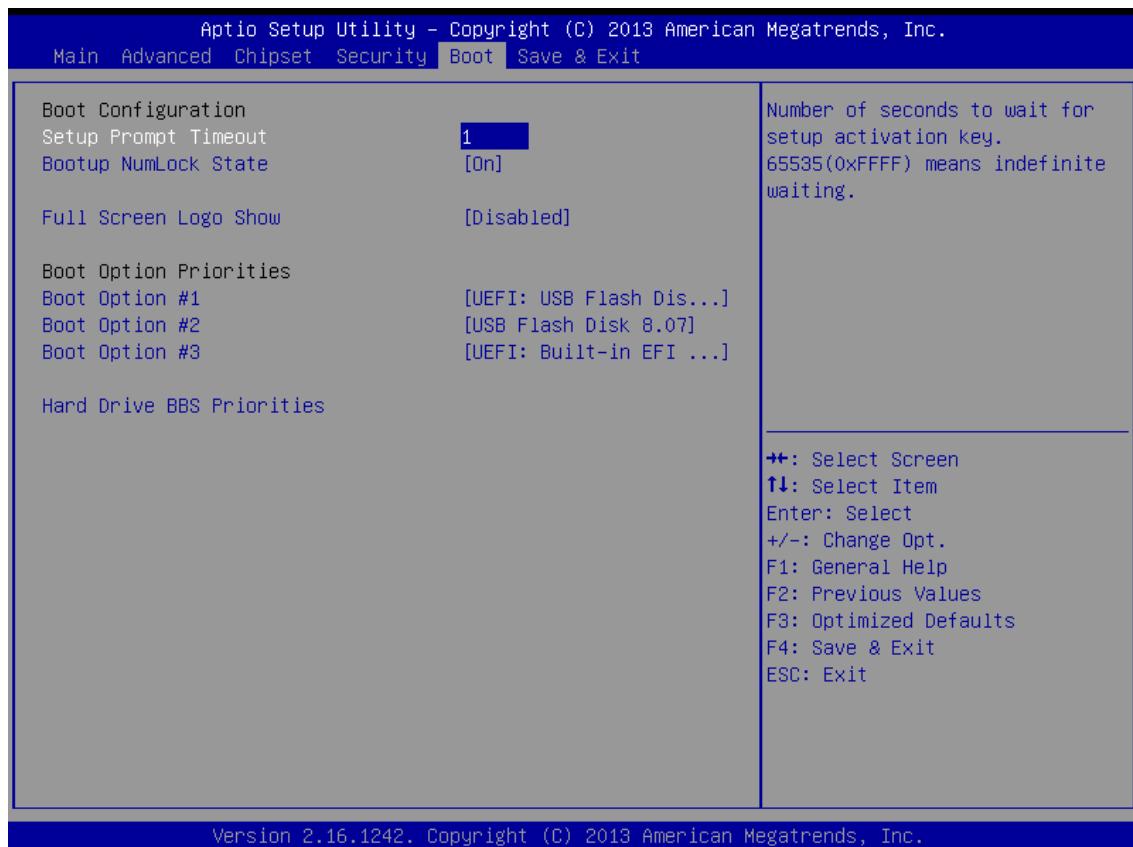

4.6.1 Setup Prompt Timeout

This item sets number of seconds to wait for setup activation key.

4.6.2 Bootup NumLock State

This item selects the keyboard NumLock state. Select <On> or <Off>.

4.6.3 Full Screen Logo Show

This item allows you to enable or disable Full Screen Logo Show function.

4.6.4 Boot Option Priorities

The items specify the boot device priority sequence from the available devices. The number of device items that appears on the screen depends on the number of devices installed in the system.

4.7 Save & Exit

This setting allows you to configure the boot settings.



4.7.1 Save Changes and Reset

This item allows you reset the system after saving the changes.

4.7.2 Discard Changes and Reset

Select this option to quit Setup without making any permanent changes to the system configuration.

4.7.3 Restore Defaults

This selection allows you to reload the BIOS when problem occurs during system booting sequence. These configurations are factory settings optimized for this system.

Appendix

WDT & GPIO

This appendix provides the sample codes of WDT (Watch Dog Timer) and GPIO (General Purpose Input/ Output).

WDT Sample Code

```
SIO_INDEX_Port      equ 04Eh
SIO_DATA_Port       equ 04Fh
SIO_UnLock_Value   equ 087h
SIO_Lock_Value     equ 0AAh
WatchDog_LDН        equ 007h
WDT_UNIT           equ 60h ;60h=second, 68h=minute, 40h=Disabled Watchdog timer
WDT_Timer          equ 30 ;ex. 30 seconds
```

Sample code:

;Enable config mode

```
mov      dx, SIO_INDEX_Port
mov      al, SIO_UnLock_Value
out     dx, al
jmp      short $+2      ;lo_delay
jmp      short $+2      ;lo_delay
out     dx, al
```

;Change to WDT

```
mov      dx, SIO_INDEX_Port
mov      al, 07h
out     dx, al
mov      dx, SIO_DATA_Port
mov      al, WatchDog_LDН
out     dx, al
```

;Active WDT

```
mov      dx, SIO_INDEX_Port
mov      al, 30h
out     dx, al
mov      dx, SIO_DATA_Port
in      al, dx
or      al, 01h
out     dx, al
```

;set timer

```
mov      dx, SIO_INDEX_Port
mov      al, 0F6h
out     dx, al
mov      dx, SIO_DATA_Port
mov      al, WDT_Timer
out     dx, al
```

;set UINT

```
mov      dx, SIO_INDEX_Port
mov      al, 0F5h
out     dx, al
mov      dx, SIO_DATA_Port
mov      al, WDT_UNIT
out     dx, al
```

;enable reset

```
mov      dx, SIO_INDEX_Port
mov      al, 0Fah
out     dx, al
mov      dx, SIO_DATA_Port
in      al, dx
or      al, 01h
out     dx, al
```

;close config mode

```
mov      dx, SIO_INDEX_Port
mov      al, SIO_Lock_Value
out     dx, al
```

GPIO Sample Code

- GPI 0 ~ GPI 3

	GPI 0	GPI 1	GPI 2	GPI 3
IO Address	0xA03h	0xA03h	0xA03h	0xA03h
Bit	4	5	6	7
Sample code	#1			

- GPO 0 ~ GPO 3

	GPO 0	GPO 1	GPO 2	GPO 3
IO Address	0xA02h	0xA02h	0xA02h	0xA02h
Bit	0	1	2	3
Sample code	#2			

```

GPI_REG    equ 0A03h
GPO_REG    equ 0A02h
GPO_0      equ 00000001b

```

Sample Code:

#1 : Get GPI 0 status

; Get GPI 0 Pin Status Register

```

In      al, GPI_REG
;al bit4 = GPI 0 status

```

#2 : Set GPO 0 status to high

; Set GPO 0 Pin to High

```

mov      dx, GPO_REG
in      al, dx
or      al, GPO_0
out      dx, al
;al bit0 = GPO 0 status

```

Copyright © Premio Inc. All Rights Reserved
www.premioinc.com
