



OPEN FRAME TOUCHSCREEN COMPUTER

H10-W210-ADL

10.1" WXGA Capacitive IP65 Open Frame Touchscreen Computer With 12th Gen Intel® N Series Processor, 2x LAN, 4x USB, 1x DP, 1x HDMI



Features

- 10.1" (16:10) WXGA Open Frame Touchscreen Computer
- World Class Certifications for Safety and Reliability: CE/FCC
- Front IP65 Rating for protection against water and dust
- Scratch Resistant 7H Glass Hardness
- Versatile Display Outputs; HDMI and DP
- MTBF Up to 30,000 Hours

Specifications

Display	
IP Rating	Front IP65
LCD Size	10.1" (16:10)
Max. Resolution	1280 x 800 (WXGA)
Brightness (cd/m ²)	400 nits
Contrast Ratio	800:1
LCD Color	16.7M
Pixel Pitch (mm)	0.169(H) x 0.1695(V)
Viewing Angle	89/89/89/89 (Typ.) (CR>=10)
Backlight MTBF	30,000 Hours
Display Port	1x DP, support 4096 x 2304 Real 4K @60Hz
HDMI	1x HDMI, support 3840 x 2160 UHD@30Hz
LVDS	Default touchscreen LCD, support 1920 x 1200 WUXGA @60Hz
Multiple Display	Triple Independent Displays
Touch	
Touch Type	10-Point PCAP Touch
Surface Hardness	7H / IK07
System	
Processor	Intel® Processor N97 6M Cache, up to 3.60 GHz
System Chipset	SoC integrated
LAN Chipset	GbE1: Intel I225-V (Support Wake-on-LAN and PXE) GbE1: Intel I225-V (Support Wake-on-LAN and PXE)
Audio Codec	Realtek ALC897
System Memory	Default 8GB DDR5 4800MT/s SODIMM (up to 16GB)
BIOS	AMI uEFI 8Mbit SPI BIOS
Watchdog	Software Programmable Supports 1~255 sec. System Reset
Storage	
M.2 B Key	128G M.2 B Key SSD (Default)
Expansion	
M.2 E Key	1x M.2 E Key Support WiFi 6e (Optional)
I/O	
Audio	1x Audio out
COM	2x RS-232/422/485 by internal cable
LAN	2x 2.5GbE LAN
USB	6x USB 2.0 by internal cable 4x USB 3.2 Gen 2
Others	Support 2x Pifa Antenna (optional)
Operating System	
Windows	Windows 10 / Windows 11
Linux	Linux Ubuntu 22.04
Power	
Power Adapter	60W (12V 5A, Default)
Power Supply Voltage	DC 9~36V

Power Connector DC Jack 5.5mm/2.5mm


Environment

Operating Temperature	-10°C to 50°C
Storage Temperature	-20°C to 60°C
Relative Humidity	10% to 80% (non-condensing)
Certification	CE, FCC Class A
Vibration	IEC60068-2-64:2008 With SSD: 5 Grms (5 - 500 Hz, 0.5 hr/axis) Designed to comply with MIL-STD-810G Method 514.7 Procedure I
Shock	IEC60068-2-27:2008 With SSD: 50G half-sin 11ms Designed to comply with MIL-STD-810G Method 516.7 Procedure I

Physical


Dimensions	252 (W) x 166 (H) x 39 (D) mm
Weights	1.3 kg
Mounting Options	Open Frame Panel Mount, Wall Mount

External I/O Mechanical Layout

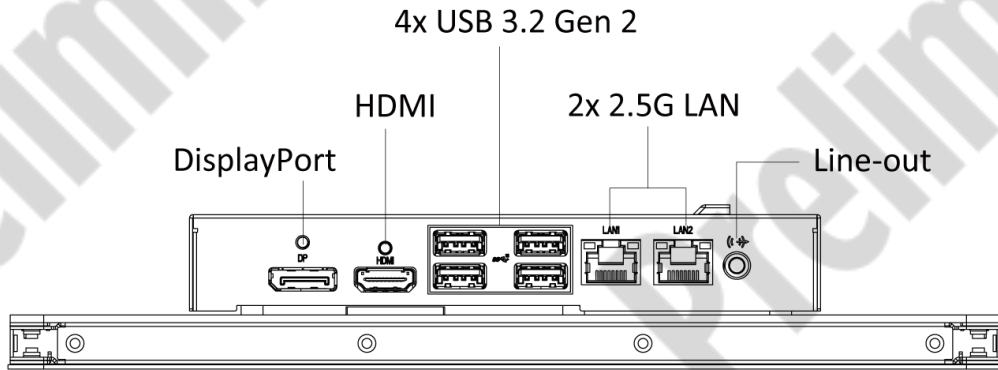

Dimension

Unit: mm

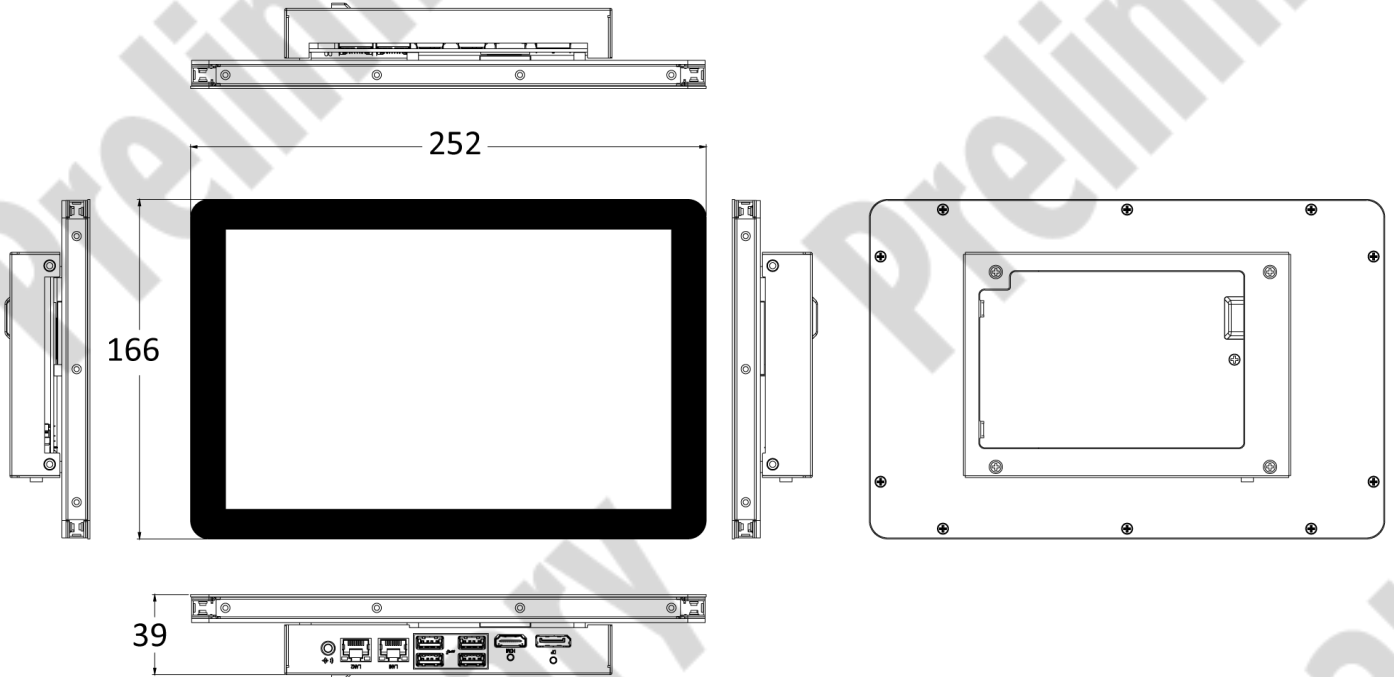

Available Models

Model No.	Description
HIO-W210C-N97-P	10.1" WXGA Capacitive IP65 Open Frame Touchscreen Computer With 12th Gen Intel® N Series Processor, 2x LAN, 4x USB, 1x DP, 1x HDMI

Optional Accessories

Model No.	Description
1-E09A06012	Adapter Output 12V 5A 60W / Input 100-240V
3-WIFI0701S10	WIFI 6E Module KIT, Intel, 2T2R & BT 5.3
1-TCOM00041	COM cable (CT-240125-01/CHEN PERNG)
1-TUSB00066	Dual USB 2.0 Cable (M-6133/CABLING)

Packing List

1x HIO-W210-ADL-N97 Open Frame Touchscreen Computer
 1x DC jack to S4P Power Cable
 1x 128G M.2 B key SSD
 1x 8GB DDR5 4800 MT/s

Compliances and Standards

Shock	IEC60068-2-27:2008 With SSD: 50G half-sin 11ms Designed to comply with MIL-STD-810G Method 516.7 Procedure I IEC60068-2-27:2008 Designed to comply with MIL-STD-810G Method 516.7 Procedure I
Vibration	IEC60068-2-64:2008 With SSD: 5 Grms (5 - 500 Hz, 0.5 hr/axis) Designed to comply with MIL-STD-810G Method 514.7 Procedure I IEC60068-2-64:2008 Designed to comply with MIL-STD-810G Method 514.7 Procedure I
Operating Temperature	-10°C to 50°C IEC60068-2-1:2007 (Cold test procedure) IEC60068-2-2:2007 (Dry heat test procedure) IEC60068-2-3:2007 (Damp heat, steady state, test procedure) IEC60068-2-14:2009 (Wide temperature range thermal shock)
EMI	<ul style="list-style-type: none"> • CE • FCC Class B • FCC Class A (47 CFR part 15.109 and part 15.107) • ICES-003 • UKCA